

Self-Contained Back Bar Refrigeration

ROYAL SERIES



BS60L-KSS-LR

Standard Features

- 35" High without Top, 36" High with 1" Optional Top
- 24" Front to Back Depth (25" with Top)
- Coved corner stainless steel interior
- Heavy duty Self-Closing 24"W Doors
- Stainless steel door handles with built-in locks
- Digital thermostat
- Built-in Cool White LED Lighting (7000K)
- DynamicChill 360° Technology
- Heated mullion to minimize condensation
- Approved for NSF 7 Open Food Storage
- Pre-drilled bottom for optional legs or casters (uses 1/4-20 self tapping 1/2"L screw)
- Eco-friendly Refrigerant and Insulation
- 5-Year Compressor Warranty
- 2-Year Parts & Labor Warranty

Base Model	Length	Doors	Amps	Bottle Capacity	HP	Weight
BS36	36"	1	1.7	165	1/5	285 lbs.
BS60	60"	2	2.2	375	1/4	360 lbs.
BS84	84"	3	2.7	600	1/3	480 lbs.
BS108	108"	4	2.8	720	1/3	525 lbs.

Case Capacity

Base Model	Long Neck Bottles	12 oz. Cans	Wine Bottles
BS36	7.5	10	72
BS60	15.5	20	162
BS84	24	34	248
BS108	30	40	288

DUAL ZONE TEMPERATURE CONTROL*

Model	Description
RB-STAT	Red Wine, 60°F - 65°F and Beer, 30°F - 40°F
RW-STAT	Red Wine, 60°F - 65°F and White Wine, 50°F - 55°F
WB-STAT	White Wine, 45°F - 50°F and Beer, 34°F - 40°F

*Only available on 60", 84", and 108" units

Specifications

Electrical	115V, 1 Phase, 60 Hz
	Furnished with 8' plug-in cord, which exists left or right rear of cooler
	NEMA 5-15P plug configuration Dedicated 15 Amp circuit recommended
Refrigeration	R290 Hydrocarbon Refrigerant
	30°F - 40°F operating range Digital thermostat on front grille
Plumbing	No drain required Condensate evaporator pan included
Insulation	2" thick foamed-in-place polyurethane
Interior	20 gauge stainless steel walls with coved corners NSF epoxy coated durable shelves - one bottom and two adjustable shelves per door
Exterior	Sides: 20 gauge stainless steel Front: 20 gauge stainless steel Top: 20 gauge stainless steel with option of 1" top
Doors	Self-closing 24"W doors available in black vinyl, stainless steel, glass with black vinyl, or glass with stainless steel 19-3/4"W x 29-11/16"H door opening

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Rev 0 • 3/2026 • No. 1.3 Self-Contained BB Refrigeration




Self-Contained Back Bar Refrigeration

ROYAL SERIES


One Door (36")

Models beginning BS36

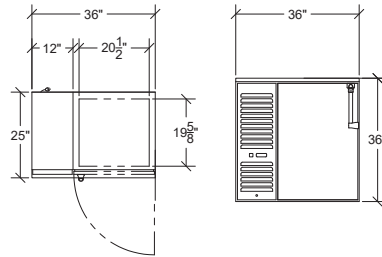


Standard Door Side View

Applies to all Models

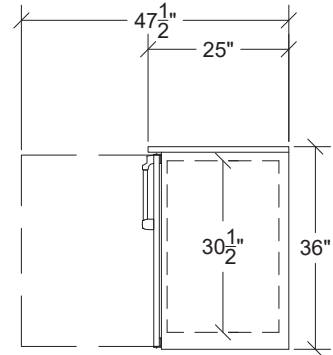


Two Door (60")

Models beginning BS60

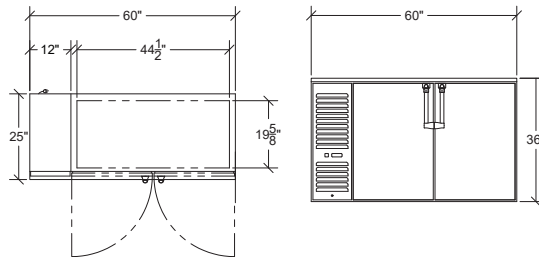


Three Door (84")

Models beginning BS84

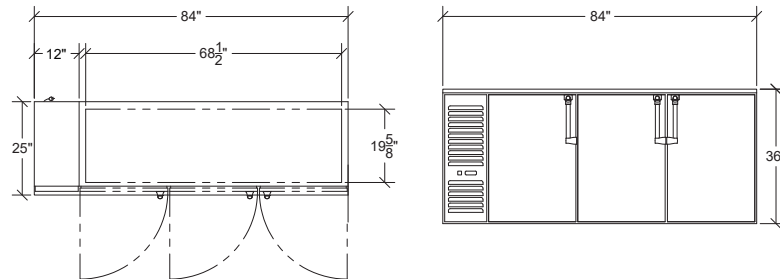

Four Door (108")

Models beginning BS108

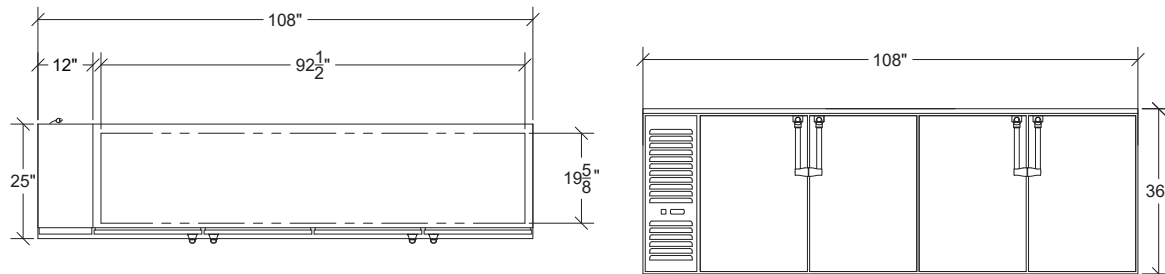

Note: Optional casters raise height 1" higher than wheel size

Note: Optional 4" or 6" legs available