



Model: _____ Item #: _____ Date: _____

Project: _____ Qty: _____ Approved By: _____

Royal Series Three Compartment Bar Sinks

Royal Series Underbar



KR19-43L

Product Compliance

- NSF/ANSI 2
- ASME A112.19.3/CSA B45.4




WARNING: Plumbing connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.

Specifications

Sink Bowl	▪ 20 gauge stainless steel 10" x 14" x 10" deep ▪ Furnished with 1-1/2" IPS rear corner drain (Model 23-122) and 7-1/2" overflow pipe
Drainboard	▪ 20 gauge stainless steel reinforced with welded braces every 6" ▪ Integrated drainboards (except KR24-73C)
Faucet	▪ 4" OC wall or deck mount faucet with 1/4 turn ceramic cartridge valves ▪ KR19 includes wall mount faucet ▪ KR24 includes deck mount faucet
Plumbing	▪ Hot/Cold Water: 1/2" IPS ▪ Drain: 1-1/2" IPS
Legs	▪ 1-5/8" tubular 16 gauge stainless steel with grey plastic bullet foot
Front Apron	▪ 20 gauge stainless steel clad over 20 gauge galvanized steel
Sides	▪ 20 gauge stainless steel
Backsplash	▪ 20 gauge stainless steel
Back & Bottom	▪ 20 gauge galvanized steel

Model	Depth (Front to Back)	Length (A)	Drainboard Size (B)	Left Side to Drain (C)	Bowls	Bowl Location	Wgt. (lbs.)
KR19-33C	19"	36"	-	4"	3	Center	55
KR19-43L	19"	48"	12"	4"	3	Left	60
KR19-43R	19"	48"	12"	15"	3	Right	60
KR19-53C	19"	60"	(2) 12"	15"	3	Center	69
KR19-63C	19"	72"	(2) 18"	21"	3	Center	75
KR19-73C	19"	84"	(2) 24"	27"	3	Center	86
KR19-83C	19"	96"	(2) 30"	33"	3	Center	94

NOTE: Letter at end of Model Number represents Bowl Location

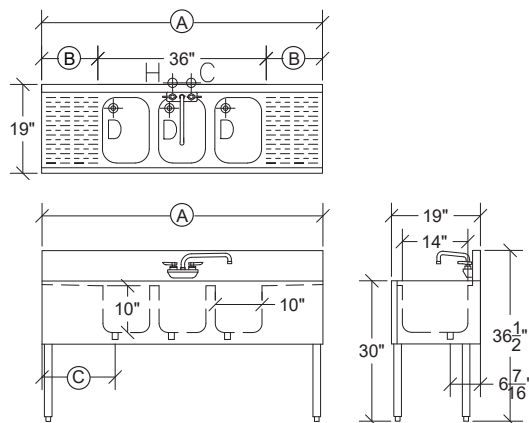

Model	Depth (Front to Back)	Length (A)	Drainboard Size (B)	Left Side to Drain (C)	Bowls	Bowl Location	Wgt. (lbs.)
KR24-33C	24"	36"	-	4"	3	Center	60
KR24-43L	24"	48"	12"	4"	3	Left	65
KR24-43R	24"	48"	12"	15"	3	Right	65
KR24-53C	24"	60"	(2) 12"	15"	3	Center	76
KR24-63C	24"	72"	(2) 18"	21"	3	Center	83
KR24-73C	24"	84"	(2) 24"	27"	3	Center	93

NOTE: Letter at end of Model Number represents Bowl Location

