

## Low Profile Refrigeration

## ROYAL SERIES



LS60L-SSS-LR

### Standard Features

- 29" High without Top, 30" High with 1" Optional Top
- 24" Front to Back Depth (25" with Top)
- Coved corner stainless steel interior
- Heavy duty self-closing 24"W doors (LS36, LS60, and LS84) and 16"W doors (LS52 and LS72)
- Stainless steel door handles with built-in locks
- Digital thermostat
- Built-in Cool White LED Lighting (7000K)
- DynamicChill 360° Technology
- Includes condensate evaporator pan
- Durable shelves, one floor rack and one adjustable shelf per door
- Approved for NSF 7 Open Food Storage
- Eco-friendly Refrigerant and Insulation
- 5-Year Compressor Warranty
- 2-Year Parts & Labor Warranty

| Base Model | Length | Doors | Amps | Bottle Capacity | HP  | Weight   |
|------------|--------|-------|------|-----------------|-----|----------|
| LS36       | 36"    | 1     | 1.7  | 110             | 1/5 | 257 lbs. |
| LS52       | 52"    | 2     | 2.2  | 165             | 1/4 | 270 lbs. |
| LS60       | 60"    | 2     | 2.2  | 250             | 1/4 | 324 lbs. |
| LS72       | 72"    | 3     | 2.7  | 260             | 1/4 | 378 lbs. |
| LS84       | 84"    | 3     | 2.7  | 395             | 1/3 | 432 lbs. |

### DUAL ZONE TEMPERATURE CONTROL\*

| Model   | Description                                   |
|---------|-----------------------------------------------|
| RB-STAT | Red Wine, 60°F-65°F and Beer, 30°F-40°F       |
| RW-STAT | Red Wine, 60°F-65°F and White Wine, 50°F-55°F |
| WB-STAT | White Wine, 45°F-50°F and Beer, 34°F-40°F     |

\*Only available on 60" and 84" units

### Specifications

|               |                                                                                                                                                                                                                                         |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Electrical    | 115 V, 1 Phase, 60 Hz                                                                                                                                                                                                                   |
|               | Furnished with 8' plug-in cord, which exits left or right rear of cooler<br>NEMA 5-15P plug configuration<br>Dedicated 15 amp circuit recommended                                                                                       |
| Refrigeration | R290 Hydrocarbon Refrigerant<br>30°F - 40°F operating range<br>Digital thermostat on front grille                                                                                                                                       |
| Plumbing      | No drain required<br>Condensate evaporator pan included                                                                                                                                                                                 |
| Insulation    | 2" thick foamed-in-place polyurethane                                                                                                                                                                                                   |
| Interior      | 20 gauge stainless steel walls with coved corners<br>NSF epoxy coated durable shelves - one bottom and two adjustable shelves per door                                                                                                  |
| Exterior      | Sides: 20 gauge stainless steel<br>Front: 20 gauge stainless steel<br>Top: 20 gauge stainless steel with option of 1" top                                                                                                               |
| Doors         | Self-closing 24"W doors available in black vinyl, stainless steel, glass with black vinyl, or glass with stainless steel<br>19-3/4"W x 24-11/16" H door opening (LS36, LS60, LS84)<br>15-3/4"W x 24-11/16" H door opening (LS52 & LS72) |

This equipment is intended for the storage and display of non-potentially hazardous bottle or canned products only.

This equipment is intended for use in an area where the ambient temperature typically does not exceed 75 °F.

Krowne • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631-0442 • F: (973) 872-1129 • support@krowne.com • krowne.com

Due to our commitment to continued product improvement, specifications are subject to change without notice.


Rev 0 • 2/2026 • No. 1.3C Low Profile Refrigeration

## Low Profile Refrigeration

## ROYAL SERIES


### One Door (36")

Models beginning LS36

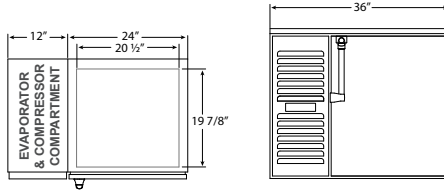


### Standard Door Side View

Applies to all Models

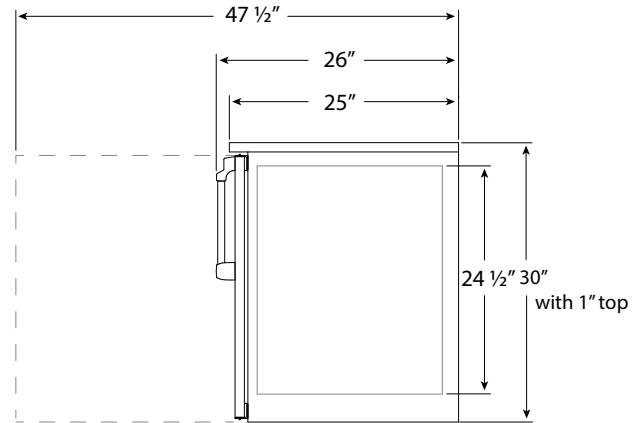


### Two Narrow Doors (52")

Models beginning LS52

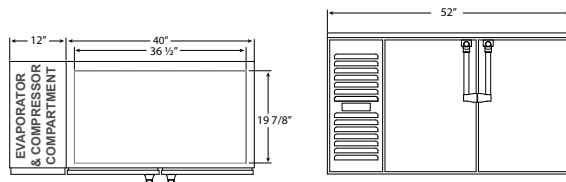


### Two Doors (60")

Models beginning LS60

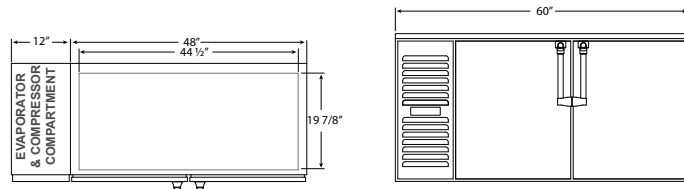


### Three Narrow Doors (72")

Models beginning LS72

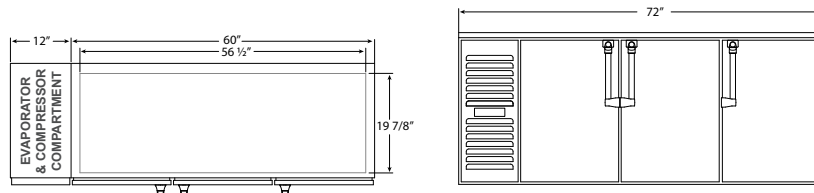

### Three Doors (84")

Models beginning LS84

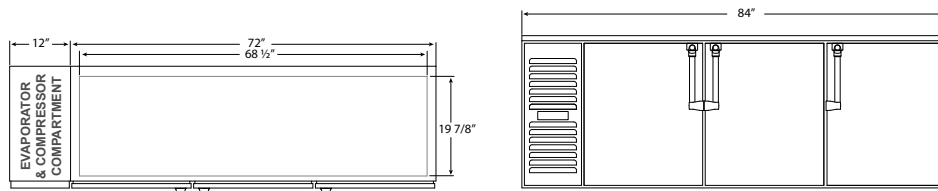

**Note:** Optional casters raise height 1" higher than wheel size & optional 4" or 6" legs available

