GAS CONNECTOR COMPLETE KIT

LIMITED LIFETIME WARRANTY

As per ANSI Z21.69/CSA 6.16


Welded Construction
360° Heavy Duty welds on both ends increases durability compared to industry standard crimped ends.

Corrugated Tubing
Stainless steel corrugated tubing built to be flexible for ease of installation.

Radial Wrap
Heavy Duty stainless steel radial wrap prevents hose from stretching.

PVC Protective Coating
PVC protective coating with antimicrobial agent for easy cleaning.

Rotational Ends
360° rotational ends provide versatility and ease during installation.

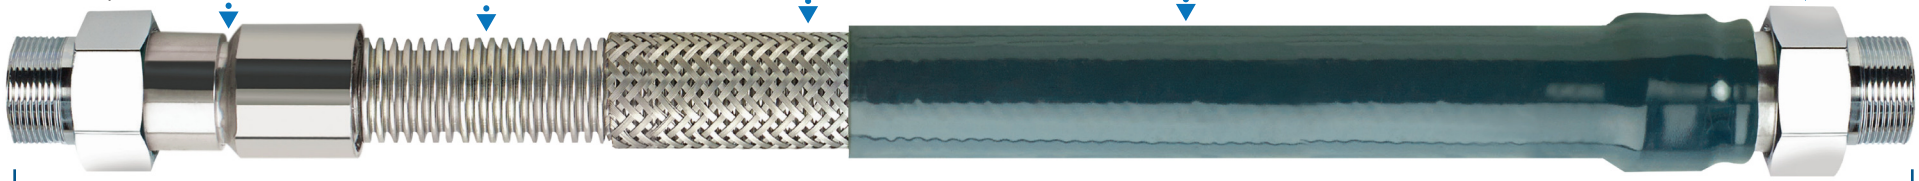

True Length
As opposed to industry standard of shortening advertised length by 3-1/2”



One-Handed Quick Disconnect
360° stainless steel ball bearings securely lock Quick Disconnect in place.



Gas Valve
Ball valve is required by code to allow for manual shutoff within 5 ft. of appliance.



90° Elbows
Elbows allow for versatility in tight conditions during installation.



Includes mounting hardware.

Restraining Kit
Comes pre-cut 12” shorter than overall length of hose to prevent hose from being pulled too far. Easily disconnects for cleaning and maintenance.

Available in any combination of interior size & lengths seen here:

Interior Sizes: ½” | ¾” | 1” | 1-¼”


Lengths: 24” | 36” | 48” | 60” | 72”

OPTIONAL COMPONENTS





Caster Positioning Chocks
Creates a home position for movable kitchen equipment. Stainless steel construction eliminates cracking commonly seen with plastic caster positioning sets. Mounting hardware included for easy installation. (2) chocks per set.

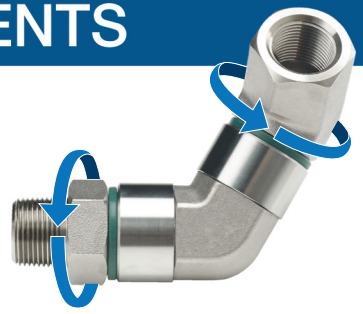

SwivelKing™
Durable stainless steel construction with dual 360° rotation significantly reduces stress and extends life of hose.

Krowne Metal Corporation • 100 Haul Rd. Wayne, NJ 07470 • P: (800) 631- 0442 • F: (973) 872 -1129 • sales@krowne.com • krowne.com