



GAS

ELEMENTS SERIES CONVECTION OVENS

IMPERIAL



ECV-1

Shown with optional casters

FLOW SYSTEM

- This system assures even cooking throughout the entire oven.
- Standard oven depth.
- Cooked or baked products have less shrinkage, more moisture and taste better.
- Creates an air flow pattern that simultaneously heats the inner and outer surfaces of the oven cavity.
- Recirculates hot air to maximize efficiency for energy savings.
- Fast temperature recovery.
- Each oven includes a 1-speed 1/2 hp fan motor for high production cooking and delicate baking.
- 50,000 BTU's (15 KW) total output put oven.
- Porcelainized oven interior for easy cleaning and provides better browning.
- 10 rack positions for maximum versatility.
- 3 oven racks included.
- Independent doors
- 50/50 doors swing open to 130°

THERMOSTATIC OVEN CONTROL

- Snap action temperature control: 150°F to 500°F (66° C to 260° C).
- 1-speed fan switch controls bake or roast
- On/Off toggle switch

EXTERIOR

- Stainless steel solid doors
- Aluminized steel side panels
- Welded and finished seams
- Steel legs on ECV-1.
- Easy to clean and maintain



ECV-2

Shown with optional casters

IMPERIAL


1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

© 2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates



GAS

ELEMENTS SERIES CONVECTION OVEN

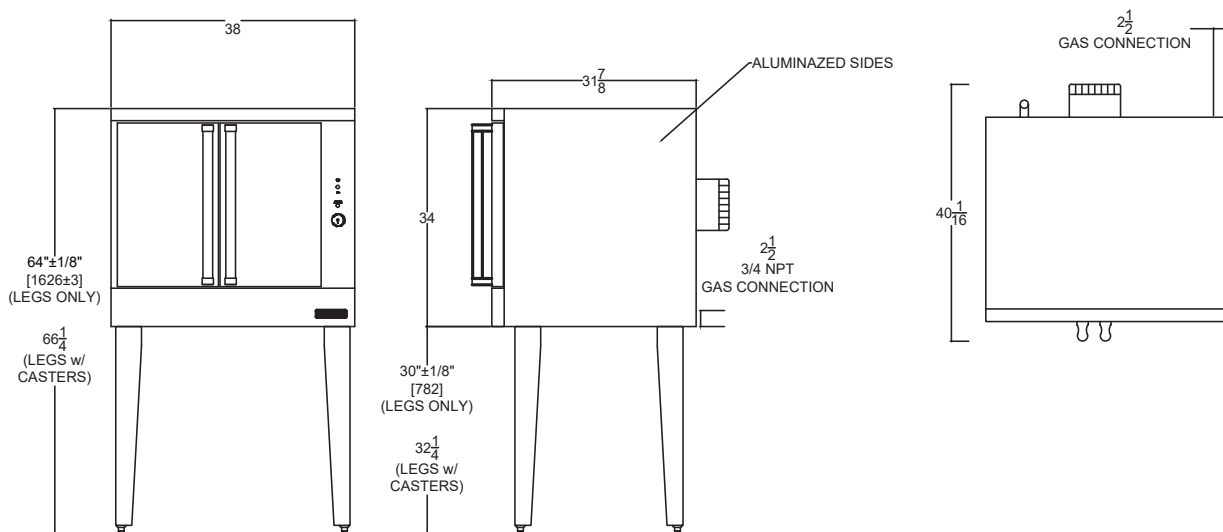

GAS CONVECTION OVENS

MODEL	DESCRIPTION	DIMENSIONS	CRATED DIMENSIONS	GAS OUTPUT BTU	GAS OUTPUT KW	SHIP WEIGHT KG	SHIP WEIGHT LBS
ECV-1	SINGLE DECK, STANDARD DEPTH	38" W X 40" D X 34" H (965 X 1016 X 864 MM)	39½" W x 47" D X 40" H (1003 X 1194 X 1016 MM)	50000	15 KW	240	528
ECV-2	DOUBLE DECK, STANDARD DEPTH	38" W X 40" D X 68" H (965 X 1016 X 1727 MM)	39½" W x 47" D X 80" H (1003 X 1194 X 2032 MM)	100000	29 KW	479	1056

UTILITY REQUIREMENTS GAS MODELS (per oven)

VOLTAGE	PHASE	HERTZ	AMPS
120	1	50/60	5.9

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters; or 2 1/4" (57 mm) overhang is required when curb mounted. Provide 0" clearance from non-combustible side and rear walls. Provide 6" (152mm) minimum clearance from combustible side walls and 0" from combustible wall at rear.

One speed motor - 1/2 HP, 1725/1140 RPM



MADE IN USA



1128 Sherborn Street | Corona, CA 92879 | 800.343.7790 | imperialrange.com | imperialsales@imperialrange.com

©2026 Imperial Commercial Cooking Equipment Imperial reserves the right to change specifications at any time without prior notice and without any obligation for past or future equipment purchases. Visit www.imperialrange.com for specification updates