

Project: _____
 Model #: _____
 Item #: _____ Qty: _____
 Approval: _____

460 Southport Commerce Blvd.
 Spartanburg SC 29306
 Phone: 864-574-6004
 Toll Free: 1-888-532-2816
 sales@ojedausainc.com
 service@ojedausainc.com
 www.ojedausa.com



COUNTERTOP COOLER

CTRH-4



Custom Graphics
 Available Upon Request

R-290 REFRIGERANT

Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION

Robust steel construction minimizes the use of plastic materials resulting in an environmentally friendly design.

ELECTRONIC CONTROL

The intelligent temperature control is programmed to ensure the correct operation of the equipment.

LED LIGHTING

LED provides long lasting energy efficient lighting with minimal heat output.

REVERSIBLE DOOR

Equipped standard with a reversible door, adding flexibility to the placement in the store.

HOT GAS EVAPORATION

Hot gas heated drain pan for condensate evaporation that reduces the need of floor drains or electric heaters.

OPERATION TEMPERATURE

Medium Temp: 34°F to 40°F.

Dimensions			Shelves	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
23.4"	27.5"	31.5"	2	1/7	120	5-15P	3.5	185 lbs	R-290
595 mm	699 mm	800 mm	Net Capacity (cf): 4		Energy Consumption: 1.32 kWh/24 h				

*Inches rounded up one decimal place. *Specifics may change without notification.



FAMILY OWNED SINCE 1948
 PROUDLY MANUFACTURED
 IN NORTH AMERICA

COUNTERTOP COOLER

CTRH-4

CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- Exterior: Galvanized metal cabinet with powder coated painted surface.
- Interior: Easy to clean pre-painted steel.
- Stainless steel leveling legs.

DOOR

- One (1) Double pane glass door assembly.
- Self closing door.
- Recessed pocket handle.
- Magnetic door gasket.
- Reversible door.

LIGHTING

- LED interior lighting mounted on the door.

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 85 °F and humidity does not exceed 55%.
- Areas with direct sunlight should also be avoided.

SHELVING

- 2 adjustable, white powder-coated wired shelves.
- Dimensions per shelf:
 - Top Shelf 20.1" W x 16.2" D.
 - Bottom shelf 20.1" W x 8.4" D.

ELECTRICAL

- 110/120 standard volt system.



5-15P PLUG

REFRIGERATION

- R-290 refrigerant.
- Electronic temperature control.
- Easy to reach components for maintenance.

ACCESSORIES

- Optional attachable lock with key.
- Stainless steel legs.
- Custom Graphics.

OPTIONAL ACCESSORIES


LEVELING LEGS



OPTIONAL LOCK WITH KEY



DIMENSIONAL DRAWING

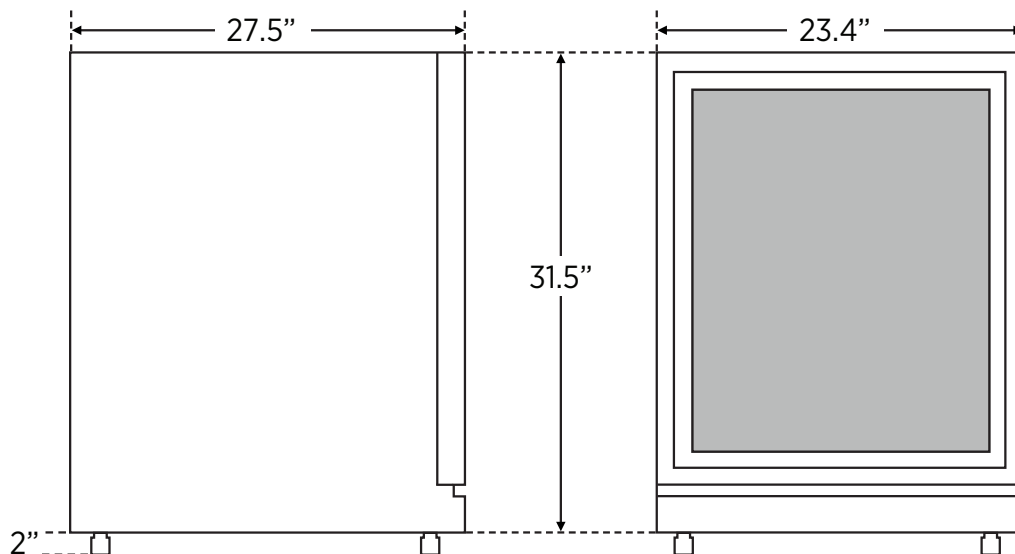

*INCHES ROUNDED UP ONE DECIMAL PLACE *SPECIFICS MAY CHANGE WITHOUT NOTIFICATION



www.ojedausa.com