Project: _____

Model #: _____

Item #: _____ Qty: _____

Approval: _____

460 Southport Commerce Blvd.
Spartanburg SC 29306
Phone: 864-574-6004
Toll Free: 1-888-532-2816

sales@ojedausainc.com
service@ojedausainc.com
www.ojedausa.com

OJEDA® U.S.A. INC.

REFRIGERATED MERCHANDISING SOLUTIONS

BUNKER FREEZER NBH-28



Custom Graphics
Available Upon Request

R-290 REFRIGERANT
Equipped with R-290 refrigerant, an eco-friendly alternative that meets the EPA's environmental impact regulations.

STEEL CONSTRUCTION
Robust steel construction minimalizes the use of plastic materials resulting in an environmentally friendly design.

SLIDING LIDS
Low-E tempered sliding glass lids reflect light and reduce the heat load inside the cabinets. Each unit comes with a lock and keys for added security.

HIGH IMPACT ABS FRAME
Made of a high impact durable plastic, this frame assures a long-term life span.

ADJUSTABLE THERMOSTAT
Freezers are equipped with a mechanical thermostat that allows the users to adjust temperature that best fits their products needs. Set from factory at -4°F.

INTERNAL LED LIGHTING
LED lighting in our bunker freezers ensures products are beautifully illuminated, enhancing visibility and creating an appealing display for customers.

CASTERS
Equipped with casters that allow easy and fast movement in the store.

TOP LIGHT BAR
Optional top light bar for custom graphics.

OPERATION TEMPERATURE
Low temp: -10°F to 0°F.

Dimensions			Baskets	HP	Voltage	NEMA Config	Amps	Crated Weight	Refrigerant
W	D	H							
28.1"	26.4"	34.3"	2	1/6	120	5-15P	3	185 lbs	R-290
714 mm	671 mm	872 mm	Net Capacity (cf): 6		Energy Consumption: 1.85 kWh/24 hrs				

*Inches rounded up one decimal place. *Specifics may change without notification.

FAMILY OWNED SINCE 1948
PROUDLY MANUFATURED
IN NORTH AMERICA

BUNKER FREEZER NBH-28

CABINET CONSTRUCTION

- High-density, CFC-Free, polyurethane insulation.
- High impact ABS top frame.
- Exterior: white galvanized metal cabinet with powder coated painted surface.
- Interior: white easy to clean pre-painted steel.
- Rated for Ice Cream.

Lids

- Removable Low-E tempered sliding glass lids.
- Includes Lock and set of keys.

Baskets

- 2 removable baskets.
- Basket Dimension 8.6" W x 21.7" D x 20.3" H.

OPERATING CONDITIONS

- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%.
- Areas with direct sunlight should be avoided.

ELECTRICAL

- 110/120 standard volt system.



5-15P PLUG

LIGHTING

- LED interior lighting.

REFRIGERATION

- R-290 refrigerant.
- Cold wall refrigeration system.
- Mechanical thermostat.
- Easy to reach components for maintenance.

ACCESSORIES

- Two ring tub holders.
- Dip well.
- Top light bar.
- Custom Graphics.

OPTIONAL ACCESSORIES

DIP WELL




2 RING TUB HOLDERS







DIMENSIONAL DRAWING

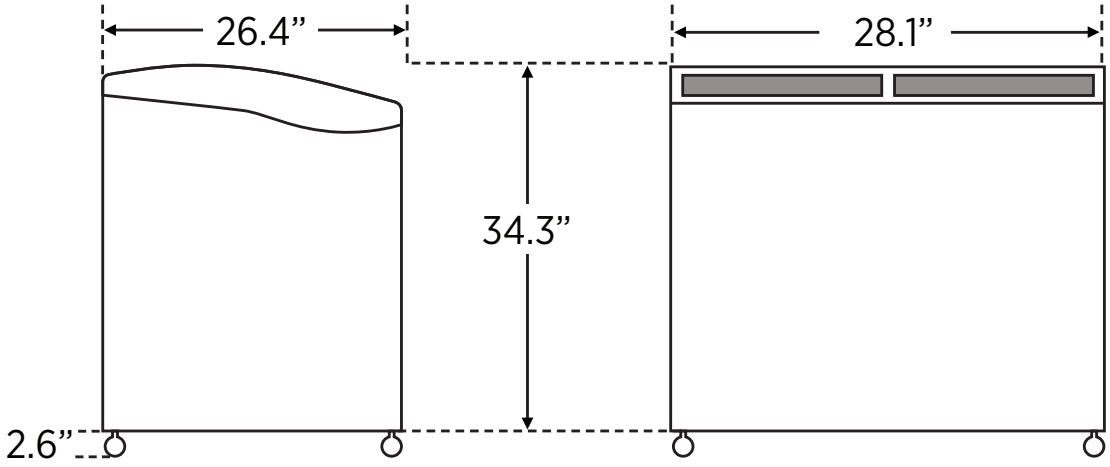

*Inches rounded up one decimal place. *Specifics may change without notification.