

Cuisine Series Heavy Duty Griddle Top Range

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- | | | | |
|----------|----------|------------|------------|
| • C36-1R | • C36-1S | • C36-1-1R | • C36-1-1S |
| • C36-1C | • C36-1M | • C36-1-1C | • C36-1-1M |



Model C36-1R
 Range with 36" Griddle,
 Valve or Thermostat
 Controlled

Standard Features

- Griddle top with 1" (25mm) thick steel plate.
- Hi-lo valve control (-1)
- Griddle control, with embedded thermostat sensor bulb (-1-1)
- Low to 450°F (232°C) (-1-1)
- Stainless front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1 1/4" NPT front gas manifold
- Can be connected individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior
- R model - 4 rack positions
C model - 3 rack positions
- R model - 1 chrome plated rack
C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°-260°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Grooved griddle - (full or 1/2)
- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Single or double deck high shelf or back riser
- Full-height stand for modular units with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4", 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4", 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4", 1", 1 1/4" (Specify)
- Rear gas connection: 3/4" NPT
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes
- Set of (4) 6" swivel casters, w/front brakes
- Extra oven rack
- Extension for 1/9 pans

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°-260°C).


Griddle Tops - 1" (25mm) thick steel plate griddle with 3" (76mm) wide grease trough. Burners rated 30,000 BTU/h each. One burner per 12" (305mm) griddle section.

NOTE: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Griddle Top Range

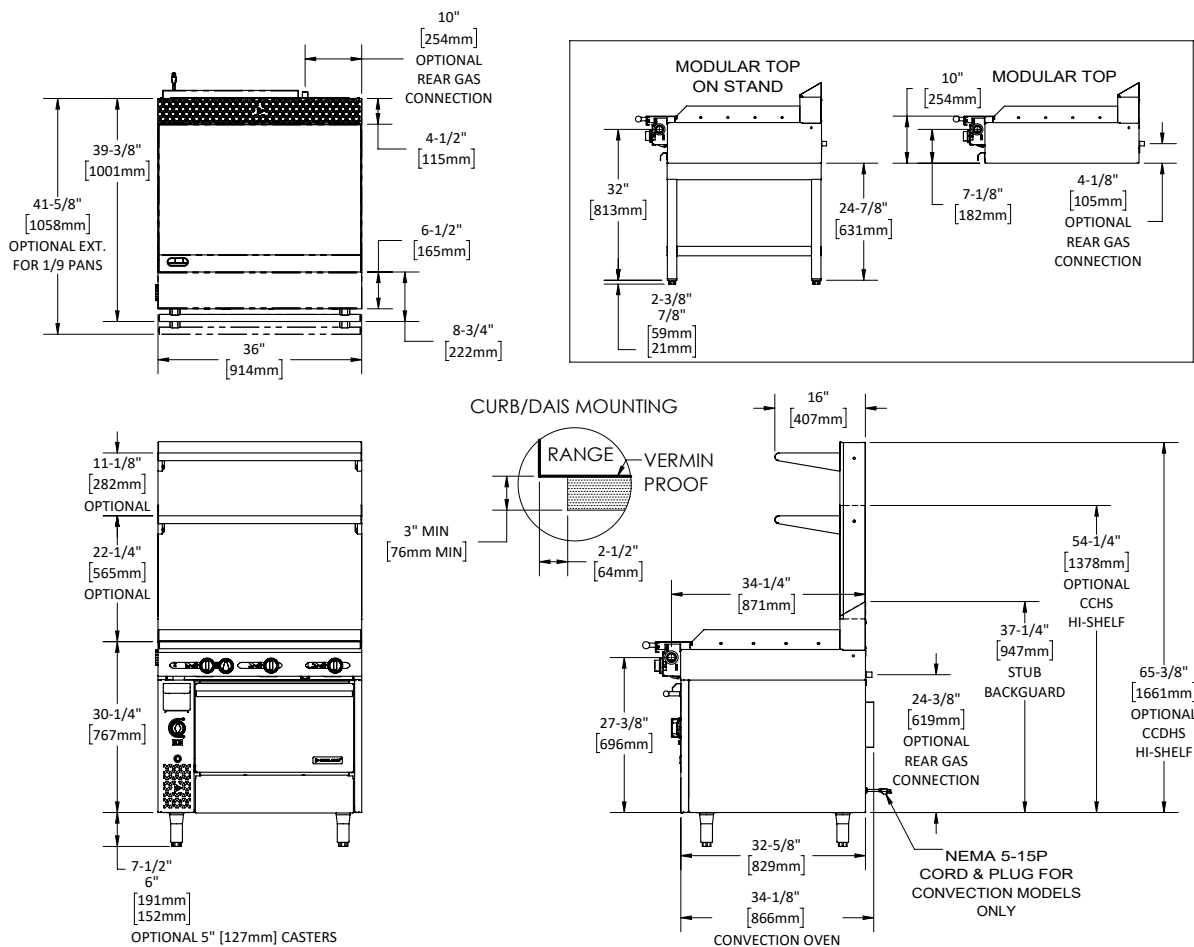

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C36-1R	36" Manual Valve Control Griddle Top - w/Standard oven	130,000	125,000	53	706/320
C36-1C*	36" Manual Valve Control Griddle Top - w/Convection oven	127,000	125,000	53	706/320
C36-1S	36" Manual Valve Control Griddle Top - w/Storage Base	90,000	90,000	53	527/239
C36-1M	36" Manual Valve Control Griddle - w/Modular Top	90,000	90,000	30	405/184
C36-1-1R	36" Thermostat Control Griddle Top w/Standard Oven	130,000	125,000	53	706/320
C36-1-1C*	36" Thermostat Control Griddle Top w/Convection Oven	127,000	125,000	53	706/320
C36-1-1S	36" Thermostat Control Griddle Top w/Storage Base	90,000	90,000	53	527/239
C36-1-1M	36" Thermostat Control Griddle Top w/Modular Top	90,000	90,000	30	405/184
*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug					

Individual Burner Ratings (BTU/h)			
Burner		NAT.	PRO.
Griddle		30,000	30,000
Standard Oven		40,000	35,000
Convection Oven		37,000	35,000
Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2 (343)	26-1/4 (667)	29 (737)
Convection Oven	13-1/2 (343)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)
Gas Pressure		NAT.	PRO.
Minimum Supply		7" WC	11" WC
Manifold Operating Pressure		6" WC	10" WC
Gas Manifold 1-1/4" NPT			
Combustible Wall Clearance			
Sides		Back	
10" (254mm)		6" (152mm)	

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
7882
01/24

