

## Air-Deck Gas All-Purpose Deck Ovens

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

### Models

- G56PB
- G56PT
- G56PT-B



Model G56PT



Model G56PT-B

### Standard Features

- Stainless steel front, sides, top, back and legs
- Stainless steel control panel
- Full-deck width, balanced spring-loaded door
- Stainless steel perforated deck
- Adjustable legs
- Electronic ignition
- Snap-action thermostat (550° F max.)
- Heat control damper system
- Forced air combustion burner; 80,000 BTU
- Single-speed fan with ¾ hp motor
- 55.5"W x 35.75"D deck surface
- 63"W x 45"D floor space
- 53"W x 7½"H door opening
- Cord supplied with NEMA 5-15P plug
- 1-year limited parts and labor warranty (USA & Canada only)

### Options & Accessories

- Direct connect vent - no charge

**G56PB** - single-deck oven with bottom power module

**G56PT** - single-deck oven with top power module

**G56PT-B** - Double-deck oven with top and bottom modules

### Specifications

Unique energy delivery system driven by controlled hot air flow designed for high volume operation.


Offers minimum preheat time; no recovery time; consistent selected temperatures; high quality production, and menu versatility.

Available in natural or propane gas.




Air-Deck Gas All-Purpose Deck Ovens

## Air-Deck Gas All-Purpose Deck Ovens

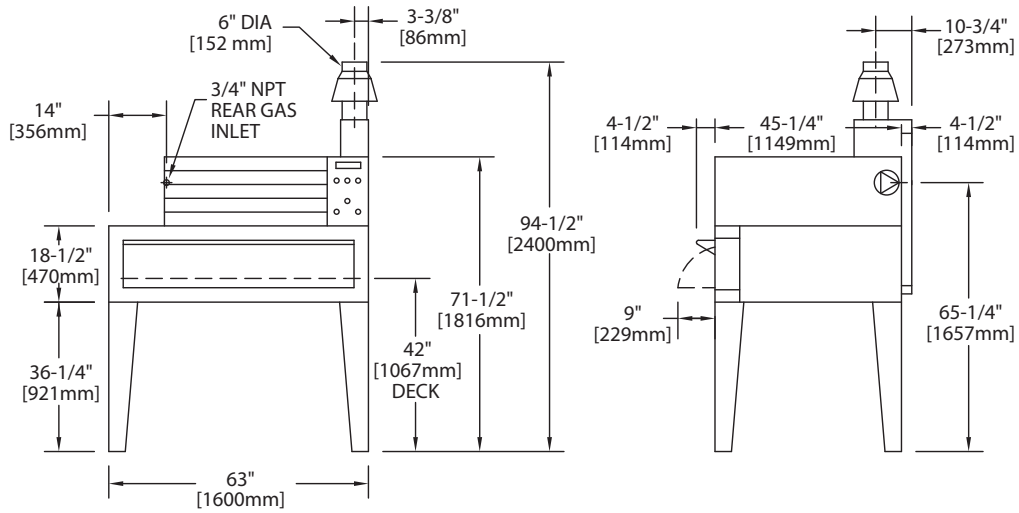

Deck with top power module and Direct Connect Venting

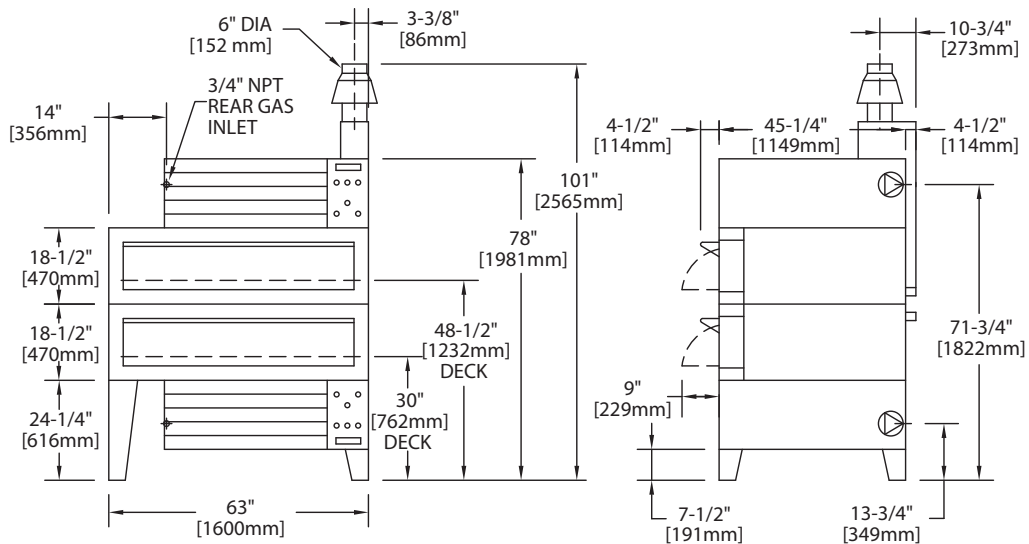

Deck (1) top power module (1) bottom power module and Direct Connect Venting

Model	Input (BTU)	Deck : In (mm)		Pizza Capacity	Motor	Cu Ft	Ship WT. lb/Kg
		Depth	Width				
G56PB	80,000	35.75(908)	55.5(1410)	(6) 18"	120V, 1PH, 60Hz 15 Amps	95	1000 /455
G56PT	80,000	35.75(908)	55.5(1410)	(6) 18"		95	1000 /455
G56PT-B	160,000	2@35.75(908)	2 @55.5(1410)	(12) 18"	(1 per deck)	190	2000 /910

Gas input ratings shown here are for installations tip to 2,000 feet (610mm) above sea level.

BTU input ratings must be derated for high altitude installations.

Cord supplied with NEMA 5-15P plug

Manifold Operating Pressure		Minimum Clearances				
		Installation to Combustible Wall			Entry	
Nat	Pro	Sides	Rear	Base	Crated	Uncrated

Welbilt reserves the right to make changes to the design or specifications without prior notice.

**Garland Commercial Ranges Ltd.**  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

**General Inquires 1-905-624-0260**  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668

[www.garland-group.com](http://www.garland-group.com)  
6953D  
12/25

