SunFire®

X-Series 60" Gas Restaurant Range

Project
Item
Quantity
CSI Section 11400
65. 566.61. 11.100
Approved
Date

Models

- X60-10RR
- X60-6G24RR



Model X60-10RR

Standard Features

- Large 27" (686mm) work top surface
- · Stainless steel front and sides
- Stainless steel 4" (102mm) plate rail
- · Stainless steel backguard w/ removable stainless steel shelf
- 12" (305mm) section stamped drip trays w/ dimpled bottom
- Durable easy to read control knobs
- Easy to clean 6" (152mm) steel core, injection molded legs
- Pressure regulator, 1" NPT
- · Ergonomic split cast-iron top ring grates
- 30,000 BTU/8.79 kW 2-piece cast-iron "Q" style donut open burner
- 18.000 BTU/5.27 kW cast iron "H" style griddle burner per 12"(305mm) width
- · Griddle plates only available on right side of range
- 5/8" (15mm) thick steel griddle plate w/ manual hi/lo valve control
- 4-1/4" (108mm) wide grease trough
- Straight steel tube oven burner 33,000 BTU/7.33 kW
- · Easy to access oven pilot
- · Reinforced chassis
- · Standard size oven with ribbed porcelain oven bottom and door interior, aluminized top, sides and hack
- Oven thermostat w/ Low to 500° F

- · Nickel-plated oven rack with two fixed-position oven rack guides
- Square door design with strong, "keep-cool" oven door handle

Options & Accessories

- Low-profile 9-3/8" (238mm) backguard stainless steel front and
- Four 6" (152mm) levelling swivel casters w/front locking
- · Celsius temperature dials

Specifications

Gas restaurant series range with standard oven.

23-5/8" (600mm) wide with a 27" (686mm) deep work top suface.

Stainless steel front, sides and 4"(102mm) wide front

6" (152mm) legs with adjustable feet.

Ten robust 2-piece 30,000 BTU/8.797 kW (Natural gas), cast-iron open burners set in split cast-iron ergonomic

Griddle on applicable models with cast iron "H" style burners, 18,000 BTU/5.27 kW (natural gas), in lieu of open burners.

Porcelain oven bottom and door liner.

Two fixed-position rack guides w/one oven rack.

Heavy duty oven door with "keep cool" door handle.

Straight steel tube oven burner 33,000 BTU/7.33 kW (natural gas) provides quality bake and good recovery.

Oven thermostat ranges from Low to 500° F (260° C).

NOTE: Use only Garland certified casters and approved restraining devices.









Garland Commercial Ranges Ltd. 1177 Kamato Road. Mississauga, Ontario L4W 1X4 CANADA


General Inquires 1-905-624-0260 USA Sales, Parts and Service 1-800-424-2411 Canadian Sales 1-888-442-7526 Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com 09/24



Gas Restaurant Rar



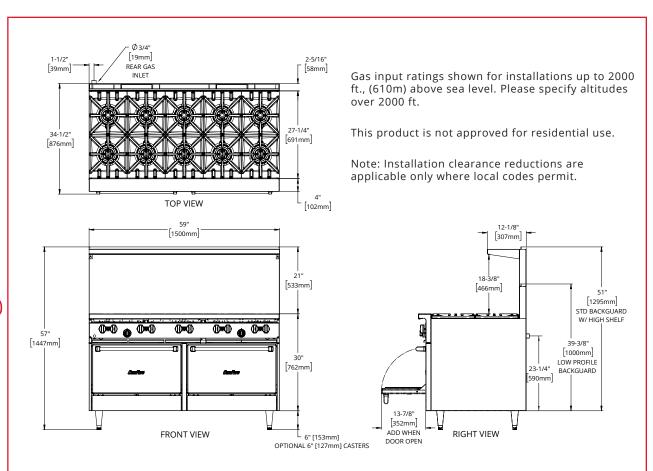

Model	Description	Total BTU/Hr Natural Gas	Shipping Information		
Number	Description		Lbs.	Kg	Cu Ft
X60-10RR	Ten Open Top Burners w/Two Standard Ovens	366,000	726	329	79
X60-6G24RR	24" Griddle, 6 Open Top Burners w/ Two Standard Ovens	282,000	791	359	79

Width	Depth In (mm)	Height w/shelf In (mm)	Oven Interior-in (mm)			Combustible Wall Clearance-In (mm)		Entry Clearances In (mm)		Manifold Operating Pressure	
In (mm)			Height	Depth	Width	Sides	Rear	Crated	Uncrated	Natural	Propane
59-1/16 (1500)	33-1/2 (851)	57 (1448)	13 (330)	22 (559)	26-1/4 (667)	14 (356)	6 (152)	37 (940)	36-1/2 (927)	4.5" WC 11 mbar	10" 25 mbar

Burner Ratings (BTU/Hr/kW)							
Gas Type	Open Top	Griddle	Standard Oven				
Natural	30,000/8.79	18,000/5.27	33,000/9.67				
Propane	26,000/6.1	18,000/5.27	29,000/8.50				

Garland/SunFire reserves the right to make changes to the design or specifications without prior notice.

