



High-temp Door Type Dishwasher

Model #: MD-DT-HTB60P

Product Details

- Stainless steel body structure with stamped design
- Built-in detergent and rinse-aid dispenser
- Built-in rinse pump
- Higher clearance: 17"
- Advance soft-lift counterbalanced system and magnetic switch for the hood
- IPX4 - Stronger protection against water hose cleaning and external humidity
- Multi-connection box: Conveniently located electrical box for easy access that improves maintenance and allows for single or three phase and multi-tension connection in the field
- AISI-304 Stainless steel. Independent wash & rinsing arms, tray filters
- Digital Controls: simple digital control panel for intuitive and user-friendly operation
- Effi Wash: Optimized hydraulic system provides a strong mechanical action combined with the optimum clean water in the tank. Balanced power keeps the perfect sanitation temperature during the cycle of the wash
- Effi Rinse: Built-in water pressure pump and air break system assuring the best sanitation result, with a linear 180°F full rinsing cycle. It also works with low input water pressure, fitting in installations that do not reach the minimum recommended 15 -25 psi
- Soft Start: Wash-pump power control that prevents wares from damage at the beginning of the washing cycle while assuring a low noise level in your facility.

Not suitable for installation in non-commercial or residential applications.



Certifications



Size

23-3/4"W x 29-1/2"D x 57-2/3"H

Cycle Periods

55/75/120 seconds



Capacity

60 Racks per hour



High-temp Door Type Dishwasher

Model #: MD-DT-HTB60P

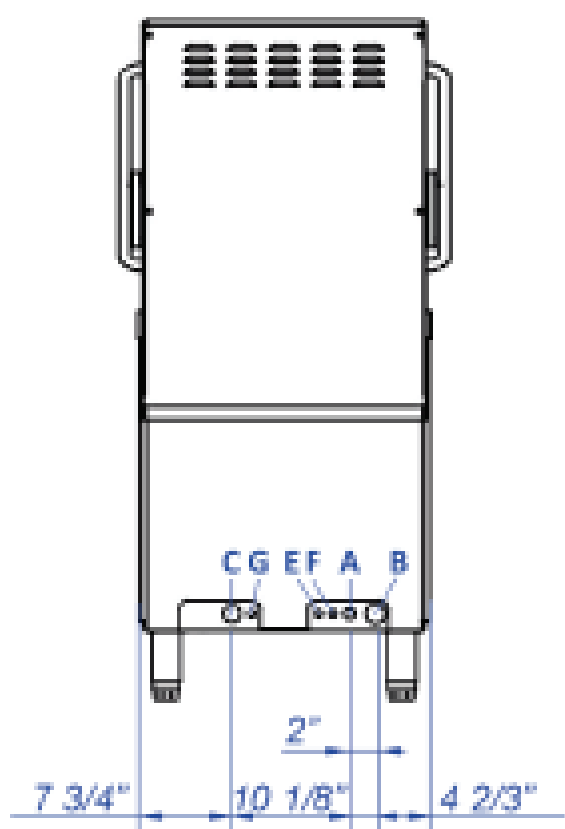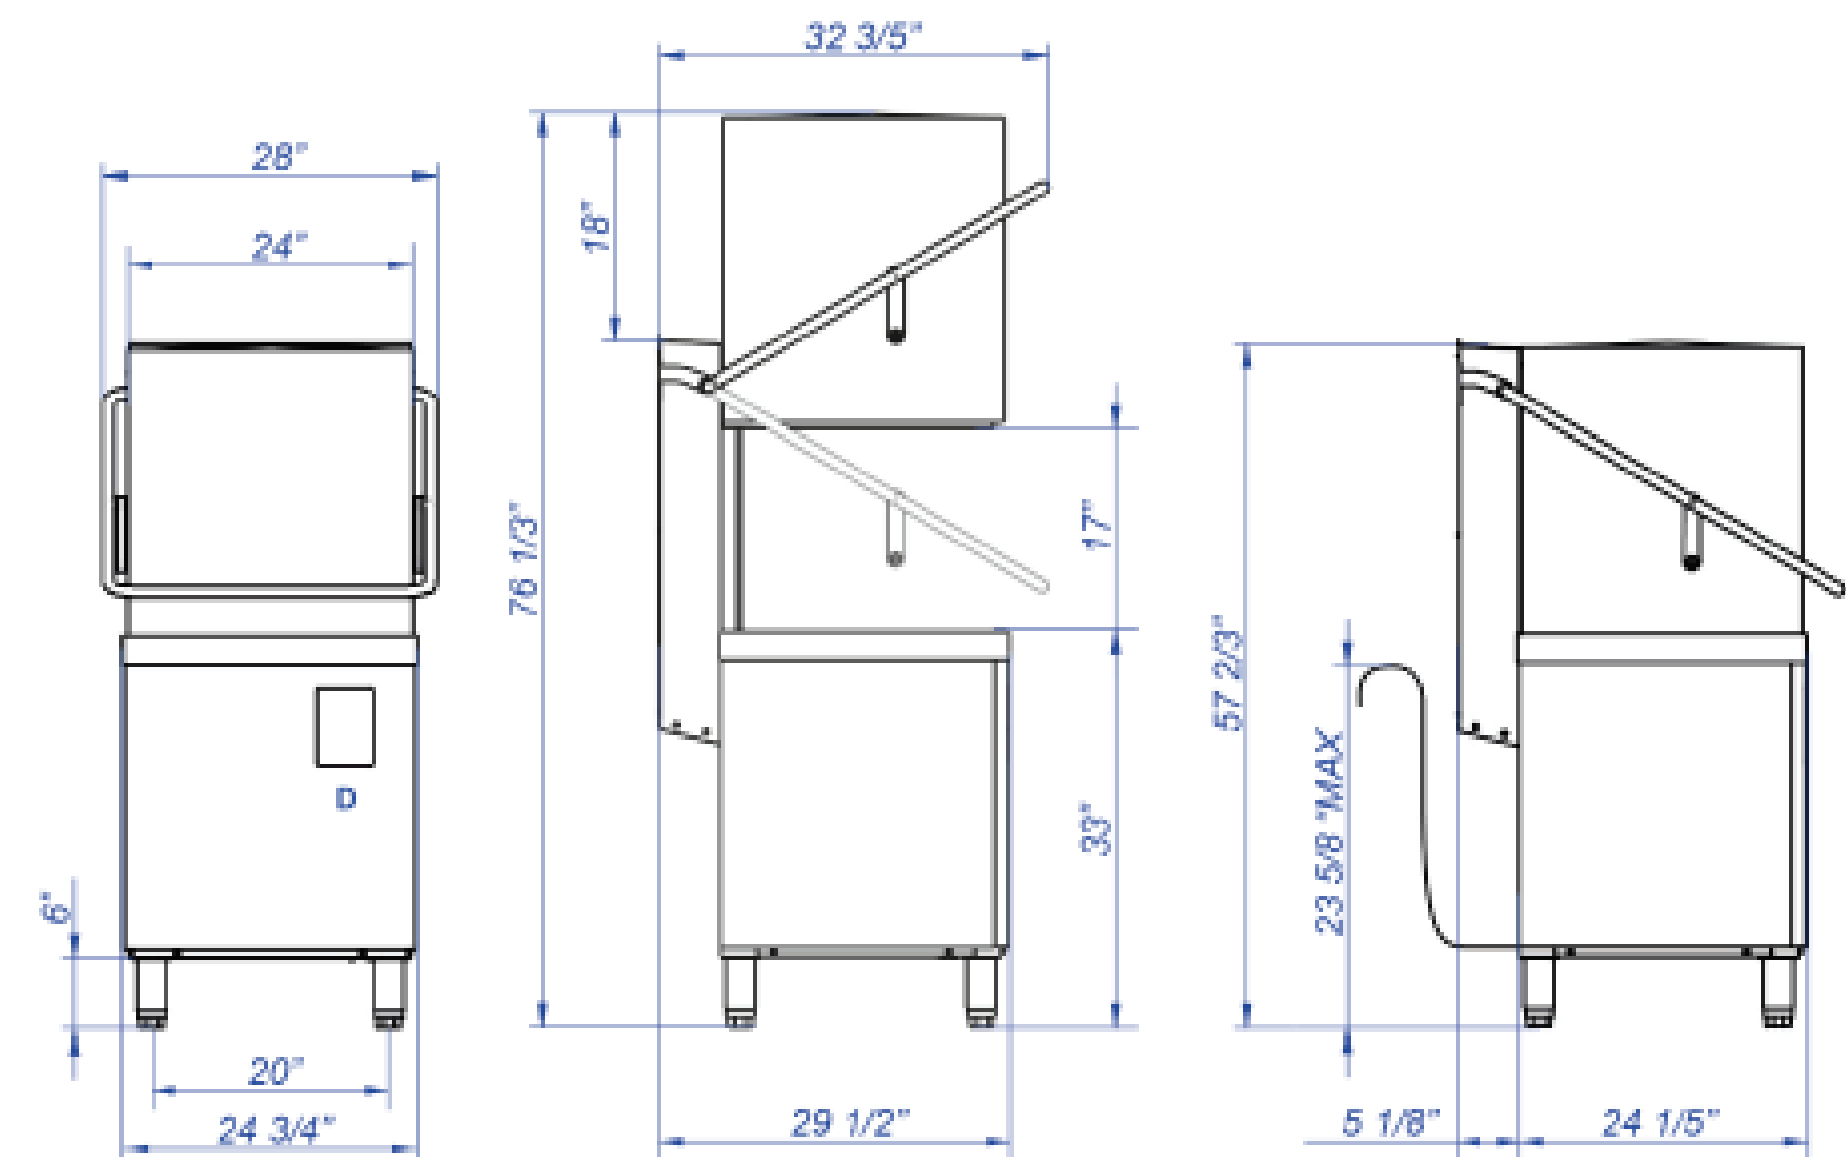

A	Water inlet	3/4"
B	Drain hose	5'
C	Power supply cable, strain relief	
D	Connection strip (Inside)	
E	Rinse aid inlet	
F	Detergent inlet	
G	Equipotential bond	

Specifications

	MDDTHTB60P
Voltage	208-240V/1-3Ph/60Hz
Wash Pump(s)	3.31 kW
Tank Heating Element	3.27-4.29 kW
Rinse Pressure Pump	0.26 kW
Boiler/Booster Heating Element	8.71/13.07 kW
Total Power	12.77-18.76 kW
Clearance	17"
Work Height	33"
Tank Capacity	8.70 gal.
Boiler Capacity	2.37 gal.
Water Pressure	20±5 psi
Water Consumption Per Cycle	0.53 gal.
Water Consumption Per Hour	31.8 gal.
Water Protection Rating	IPX4
Washing Water Temperature	150°F
Rinsing Water Temperature	180°F
Water Inlet	3/4"
Water Inlet Temperature	120°F-140°F
Net Weight	250 lbs.
Gross Weight	274 lbs.
Packing Size	30"W x 35"D x 63"H
Noise Level	<65 dBA

