



Models AH, C, B, CB and Scullery B Quick Setup Instructions

WARNING: Electrical and plumbing connections need to be made by a licensed service person and comply with all Federal, State and Local Health, Electrical, Plumbing and Safety codes.

MODEL AH REAR VIEW

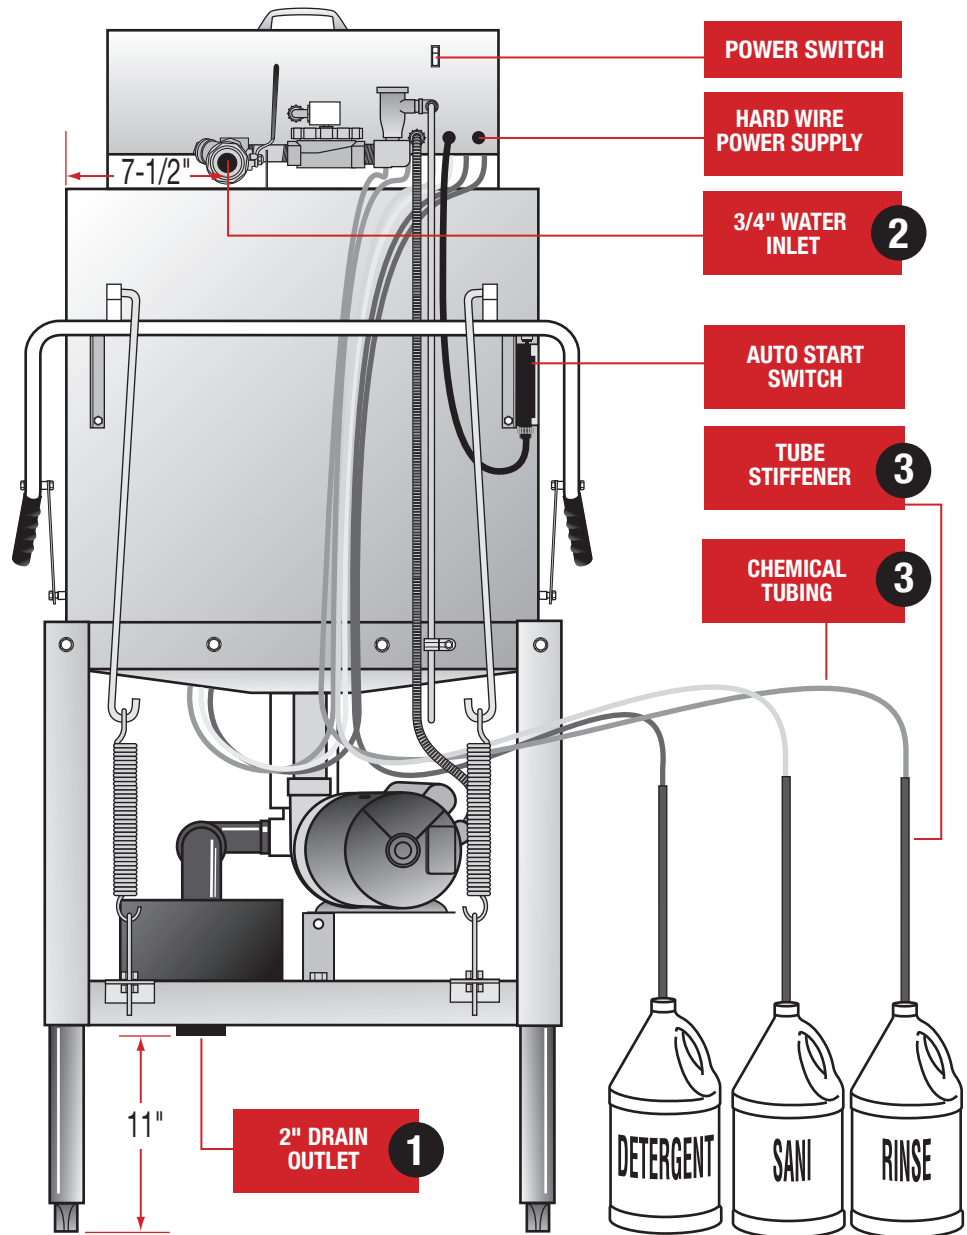


STEP 1

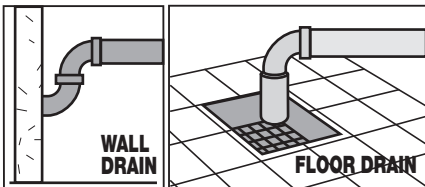


Connect the drain pipe from scrap accumulator to floor or wall drain.

STEP 2

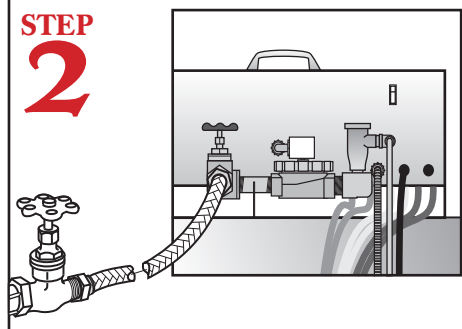

Connect dishmachine to hot water source recommended 140 temperature (120 minimum temperature required).

STEP 3

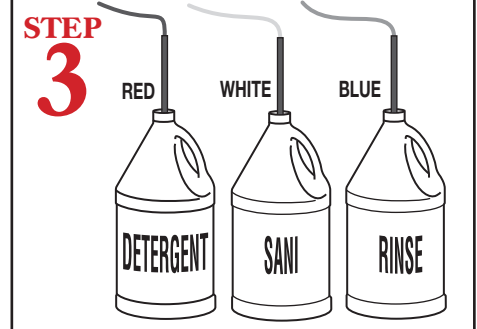


Insert tube stiffener with chemical tubing into each corresponding chemical dispensers.

Models AH, C, B, CB and Scullery B

Quick Setup Instructions


WARNING: Electrical and plumbing connections need to be made by a licensed service person and comply with all Federal, State and Local Health, Electrical, Plumbing and Safety codes.

STEP 4

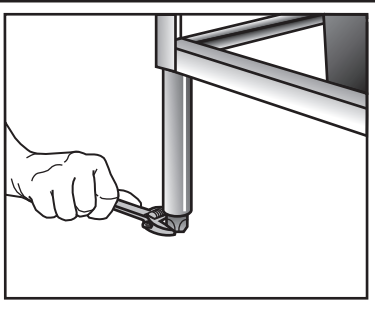


Level dishmachine by adjusting leveling legs. Dishmachine must be level front to back and side to side to ensure proper performance.

STEP 5

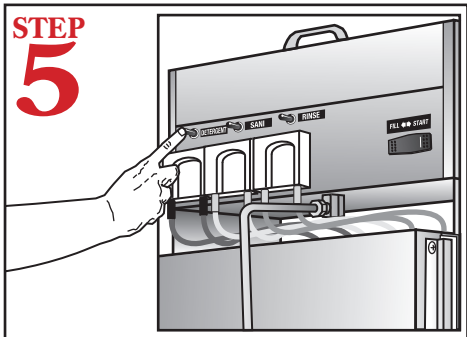


Press and hold down the three Prime Switches for the chemical pumps until product is discharging into the machine.

STEP 6

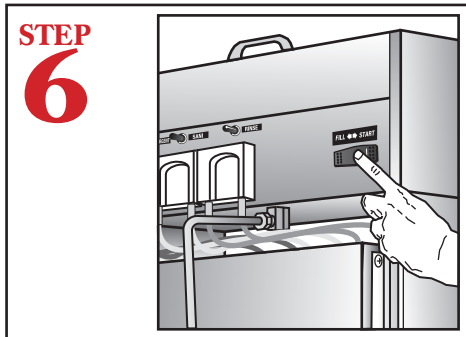

Press and hold the Fill/Start Switch until the water level is approximately 1/2" to 3/4" below the overflow hole in the PVC standpipe.

STEP 7

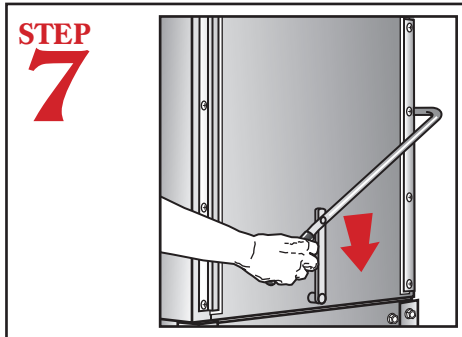

To start machine close the doors. The machine will automatically start and run through its cycle.

MODEL AH FRONT VIEW

