

Technical Information

Reveal® - Refrigerated Self-Service Slide In Counter Case

Structural Concepts®

DELIVERING FRESH. ALWAYS.™

DIMENSIONS / SHIPPING

Model	L"	L1"	L2"	Est Wt (lbs)
NE3627RSSV	N/A	35.750	7.500	750
NE4827RSSV	N/A	47.750	7.500	850
NE6027RSSV	N/A	59.750	7.500	900
NE7227RSSV	N/A	71.750	7.500	950

ELECTRICAL

Model	System Circuit Volts			Ph	Frq	Rated Load Amps	Min Cir Amps	Max OCP Amps	Watts	Wires	NEMA Plug	Amps Lights	Amps Fans	Amps Anti-Sweats	Amps Misc/Refrig/Heat
NE3627RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.05	15	15	36	2+G	Leads Single	0.70	0.15	0.12	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.05	15	15	36	2+G	Leads Single	0.70	0.15	0.12	0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	15.15	20	20	1,508	2+G	5-20P or L5-20P	N/A	0.45	4.08	10.62
NE4827RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.56	15	15	76	2+G	Leads Single	0.70	0.60	0.18	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.56	15	15	76	2+G	Leads Single	0.70	0.60	0.18	0.08
	Self-Contained (R290)	Circuit #1	110-120	1	60	15.65	20	20	1,544	2+G	5-20P or L5-20P	N/A	0.90	4.13	10.62
NE6027RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	85	2+G	Leads Single	0.70	0.60	0.22	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.60	15	15	85	2+G	Leads Single	0.70	0.60	0.22	0.08
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,806	2+G	6-20P or L6-20P	N/A	0.44	3.52	13.61
NE7227RSSV	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	96	2+G	Leads Single	0.70	0.60	0.26	0.08
	Remote (DX)	Circuit #1	110-120	1	60	1.64	15	15	96	2+G	Leads Single	0.70	0.60	0.26	0.08
	Self-Contained (R290)	Circuit #1	208-240	1	60	16.00	20	20	2,821	2+G	6-20P or L6-20P	N/A	0.44	3.54	13.61

REFRIGERATION

Model	Zone	Section	System	Envt	REMOTE REFRIGERATION					GLYCOL / R744 REFRIGERATION			
					SST (°F)	Conv. Rack BTUH	Para. Rack BTUH	Defrost Interval (Hrs)	Defrost Duration	Total GPM	Pressure Drop (psi)	Concent (%)	Liquid Temp (°F)
NE3627RSSV	All	Refrigerator	Remote-DX	Type II	20	2,635	2,440	4.00	30.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	2,138	1,980	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE4827RSSV	All	Refrigerator	Remote-DX	Type II	20	3,478	3,220	4.00	30.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	2,830	2,620	4.00	30.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE6027RSSV	All	Refrigerator	Remote-DX	Type II	20	4,342	4,020	4.00	25.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	3,542	3,280	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
NE7227RSSV	All	Refrigerator	Remote-DX	Type II	20	5,184	4,800	4.00	25.00	N/A	N/A	N/A	N/A
	All	Refrigerator	Remote-DX	Type I	20	4,212	3,900	4.00	25.00	N/A	N/A	N/A	N/A
	All	Main	Self-Contained-R290	Type II	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

INTENDED ENVIRONMENT

Type II - Designed to operate in ambient conditions of 80°F and 55% relative humidity unless noted otherwise under Envt above.

WARMEST AVERAGE PRODUCT TEMP & INTENDED USE OF ZONES

Zone	Temp (°F)	Intended Use
1	40	Packaged refrigerated products

IMPORTANT NOTES

- 1) REMOTE REFRIGERATION NOTE: Condensing unit not included, floor drain required.
- 2) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 3) Back side of counter must be open or vented the full length of the unit to allow proper ventilation for the refrigeration system.
- 4) A vent in the front of the counter recommended to help dissipate compressor heat.
- 5) Rear Access - Counter must be configured to allow air to be drawn in the rear and discharged out the front.
- 6) Front Access - Counter must be configured to allow air to be drawn in the front and discharged out the rear.
- 7) 19.25" minimum space required beneath counter surface.
- 8) Glass warranty only applicable to first point of delivery.

Technical Information

Reveal® - Refrigerated Self-Service Slide In Counter Case

REGULATORY	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF/ANSI 7



In Accordance with
AHRI Std 1200

NOTE: ALL DIMENSIONS APPROXIMATE


- ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD).
- LOCATION OF DRAIN TUBE FOR REMOTE REF.
ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).

- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES
ACCESS AREA.


- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Technical Information


Reveal® - Refrigerated Self-Service Slide In Counter Case

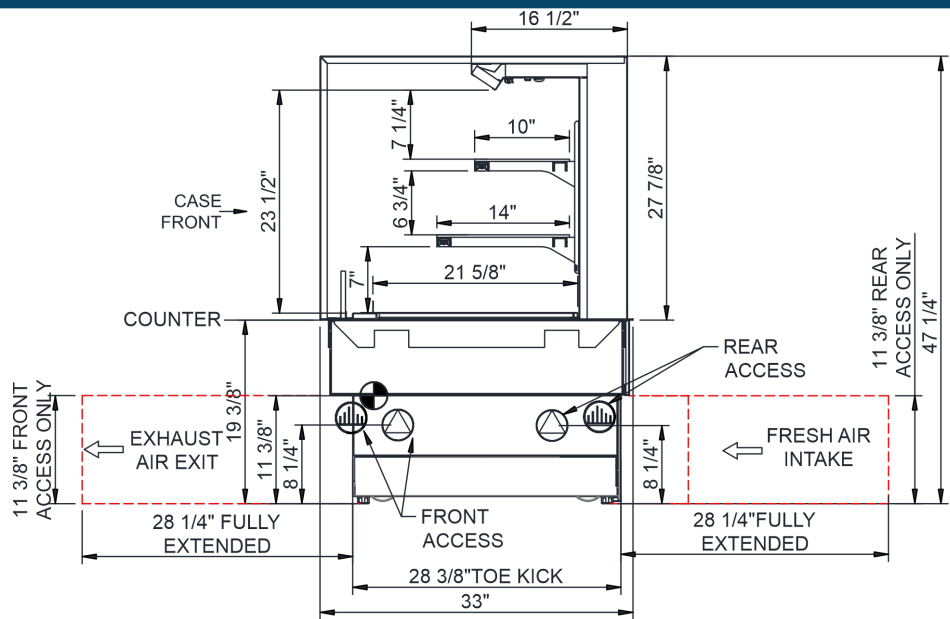

- NOTES:
- 1. 11 3/8" TALL, FULL WIDTH OF CASE OPENING IN CABINET OR COUNTER IS REQUIRED TO PULL OUT REFRIGERATION SYSTEM.
 - 2. BACK OF COUNTER / CABINET MUST BE VENTED PROPERLY FOR ADEQUATE AIRFLOW TO CONDENSER.
 - 3. **REPRESENTS REAR PULLOUT REFRIGERATION. AIR FLOW INTAKE AND EXIT DETAILS ARE REVERSED WITH FRONT PULLOUT REFRIGERATION OPTION.
 - 4. SELF-CONTAINED ACCESS ONLY BY PULLING OUT CONDENSER UNIT.
 - 5. 4" OPEN AREA CLEARANCE REQUIRED FOR AIR FLOW FRONT AND REAR OF CASE.

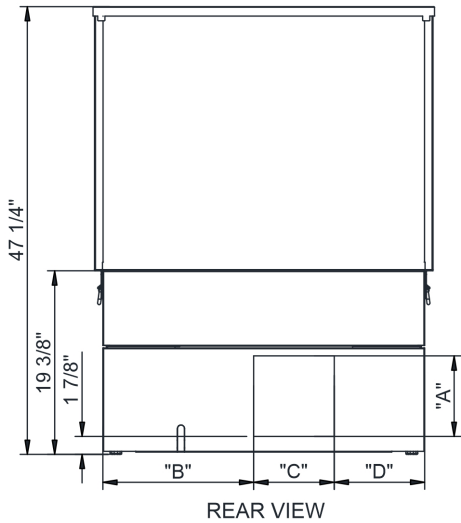

	"A"	"B"	"C"	"D"
NE3627RSSV	8 1/2"	16"	8 1/2"	9 1/2"
NE4827RSSV	8 1/2"	28"	8 1/2"	9 1/2"
NE6027RSSV	8 1/2"	18 5/8"	8 1/2" x2	9 1/2"
NE7227RSSV	8 1/2"	22"	8 1/2" x2	9 1/2"

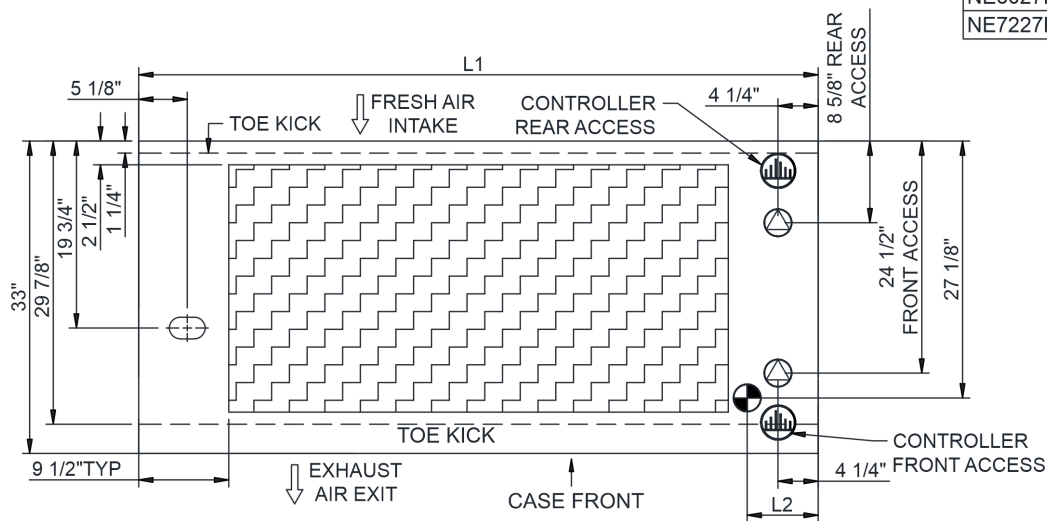

NOTE: ALL DIMENSIONS APPROXIMATE

-  ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
-  REFRIGERATION LINE CONNECTION.
-  SELF-CONTAINED CASE SERVICE ACCESS AREA.
-  LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
-  REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
-  DRY CASE SERVICE ACCESS AREA.