


Food Prep. Tables

SIDE MOUNTED CONDENSING UNIT (EP & EPP SERIES)

Refrigerators



The Food Prep. Table (Side Mount) series features cold storage and working space for ingredients that need to be cut, sliced and prepared before use. It serves a variety of functions in the sandwich, burger, pizza, salad and dessert lines not only in prep-work but also in food assembly, as well as condiment, sauce and topping dispensary.



Insulated Top Lid

Closes for cold storage.
Props open when serving.



Adjustable Top Pans

Detachable dividers accommodate
varied top pan sizes.




Detachable Cutting Board

Removable for cleaning.
Extendable for extra prep space.



Blizzard R290

EPA/DOE approved, all-in-one,
slide-out cooling cartridge.



All Stainless Steel

High quality finish with 2.5"
thick thermal insulation.



Ridge-Lined Gasket

Heavy-duty door gaskets
snap out/in for easy cleaning.



Optional Overshelf

Stainless steel double overshelf
for additional storage.



Other Features

Digital control, overheat
alarm, ECM motors.



More Features

LED lighting, vacuum relief,
3" or 5" swivel casters.

Pizza Prep. Tables – EPP Series

Side Mounted Condensing Unit



EPPR1



EPPSR2



EPPR2



EPPR3

Cabinet Construction

- Heavy duty stainless steel interior / exterior with rounded corners for a hazard-free workspace.
- Open spaced interior with no walls between cabinet compartments.
- Vented stainless steel panel between top pan area and cabinet catches food debris.
- 16 gauge, high quality stainless steel worktop, lid and hood.
- Galvanized steel bottom and rear.
- 2.5" thick high density polyurethane insulation.
- Four 5" swivel casters with locks on front set (six casters for model EPPR3). Leg stabilizers standard for all models.

Refrigeration System

- Side mounted, self-contained and fully detachable Blizzard R290 condensing unit uses environmentally friendly, EPA-compliant R290 refrigerant with zero (0) Ozone Depletion Potential (ODP) and three (3) Global Warming Potential (GWP). Blizzard R290 is easily replaceable and requires no on-site brazing.
- Electronically commutated (ECM) fan motors achieve rapid cooling with less energy consumption.
- Full-length air duct ensures optimal cold air circulation.
- Time-initiated and temperature-terminated auto defrost cycle for seamless operation.
- Large capacity, corrosion-resistant condenser and evaporator coils.
- Self-maintaining, energy-efficient condensate drain pan requires no external drains or electric heaters.
- High performance, auto-reverse condenser fan motor supports compressor ventilation and condenser coil cleaning.
- Pressure relief devices allow rapid cabinet re-entry.
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P.

Doors

- Heavy duty stainless steel interior / exterior.
- 2.5" thick high density polyurethane insulation.
- Frame heaters prevent exterior moisture build up.
- Self-closing with adjustable torsion system for a positive seal.
- Snap-in magnetic gasket for ease of cleaning.
- High strength, recessed handles.

Preparation Area

- NSF certified polycarbonate 6" deep pans (see table for quantity).
- 1/2" thick, foam insulated lid keeps top pan area cold and prevents moisture build-up.
- 19 1/4" deep cutting board is removable for ease of cleaning.

Shelving

- Two epoxy coated, steel wire shelves per section.
- Height adjustable stainless steel clips.

Temperature Control

- Multi-function digital controller with easy to read LED display.
- Factory preset temperature, 35°F. Temp-set range from 33°F to 54°F.
- Audible overheat protection alarm for compressor and condenser coil.

Options

- NSF certified stainless steel double overshef.
- Additional shelving.
- 3" swivel casters with locks.
- 3.5" – 6" height-adjustable and interchangeable legs.

↔ = Interior Dimensions ↔ = Exterior Dimensions

ABS Legs




Two additional front adjustable stainless steel clad ABS legs provide extra stability when opening and closing doors, and three additional leg for EPPR3 for weight support.





Equipped with 9 ft long NEMA 5-15P plug.

Air Flow




Front view of cabinet interior demonstrates air circulation from left to right.


Side View

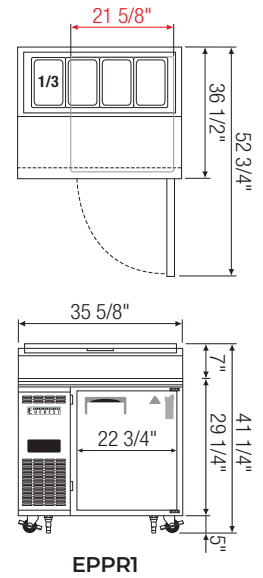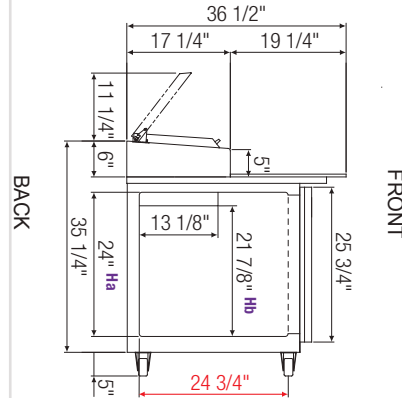


EPPR1

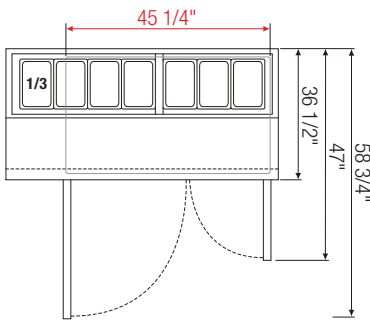




EPPSR2

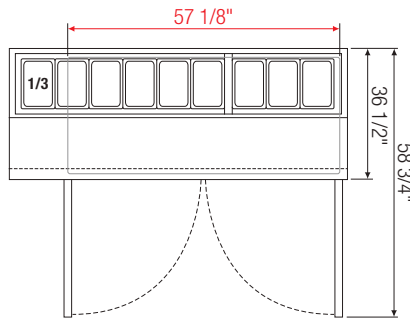

EPPR2

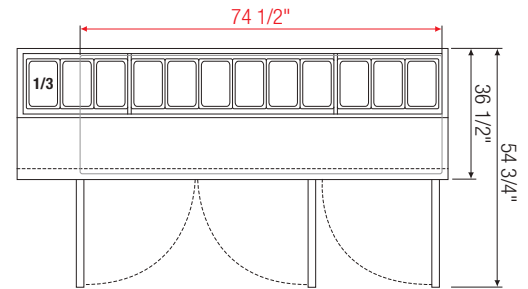

EPPR3

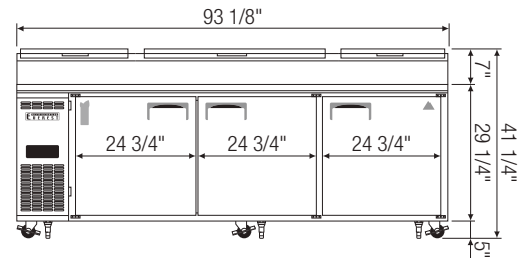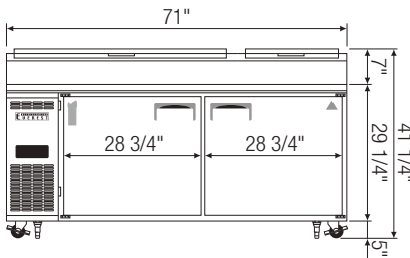

Model	Ref/ Frz/ Dual	# of Doors	Capacity [†] (Cu. Ft.)	HP	Refrigerant	# of Shelves	# of Pans	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)		
											L	D ^a	H [*]
EPPR1	Ref	1	9	1/3	R290	2	1/3 X 4	115-60-1	2.5	295	35 5/8	36 1/2	36 1/4
EPPSR2	Ref	2	16	1/3	R290	4	1/3 X 7	115-60-1	2.5	399	59 1/8	36 1/2	36 1/4
EPPR2	Ref	2	23	1/3	R290	4	1/3 X 9	115-60-1	2.5	450	71	36 1/2	36 1/4
EPPR3	Ref	3	30	1/3	R290	6	1/3 X 12	115-60-1	2.5	665	93 1/8	36 1/2	36 1/4

* Height does not include 5" for casters; height includes top lid and handle.

^a Depth includes 19 1/4" cutting board.

Ha, Hb Interior Height

Ref = Refrigerator

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity ([†]) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.