



Induction Technology



Cooking Concepts for
Professionals

 **ADVENTYS**

100 Niantic Avenue; Suite 104, Providence, RI 02907

Tel: (401) 273 - 3300 Fax: (401) 273 - 3328

Email: sales@equipex.com

www.equipex.com

Bioline

BRIC 2500/3000/3600 - 208/240 V

- ◆ Durable vitroceramic glass
- ◆ Either 2500, 3000 or 3600 watts - 50/60 Hz
- ◆ Temperature in F° or 4 digit power level display
- ◆ Stainless steel casing
- ◆ 110 temperature levels (C°) / 198 temperature levels (F°)
- ◆ Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- ◆ 25 power levels



DWIC 3600 - 208/240 V

BWIC 3600 - 208/240 V



- ◆ Durable vitroceramic - Wok
- ◆ 3600 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch control panel: On/Off + (+/-) with 2 digits display + 3 Presets + Timer (99 min) + 25 power levels
- ◆ Uniform temperature at bottom and sides
- ◆ Stainless steel edge frame protects glass and pan

 **ADVENTYS**

www.equipex.com

EQUIPEX

Exclusive Drop-in

DRIC 2500/3000/3600 - 208/240 V

- ◆ Durable vitroceramic glass
- ◆ Either 2500, 3000 or 3600 watts - 50/60 Hz
- ◆ Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- ◆ Remote control panels available



Griddles

BGIC 3000/3600 - GLP6000 - DGIC 3000/3600


- ◆ Multi-layer griddle surface
- ◆ Capacitive touch controls
- ◆ 12 temperature levels
- ◆ Power output: 3000 - 6000 WATTS
- ◆ preheat to 400°F in 2 minutes
- ◆ Easy to clean
- ◆ 1 or 2 zone countertop
- ◆ 1 zone drop-in



Buffet

GL 650/1800/3000DI - 120 V or 208/240 V

- ◆ Durable vitroceramic glass
- ◆ 650/1800/3000 watts - 50/60 Hz
- ◆ Capacitive Touch control panel: On/Off + (+/-) + Timer (99 min)
- ◆ Option: Remote control panel - 9 power levels (GL650DI) - 20 power levels (GL1800/3000DI)

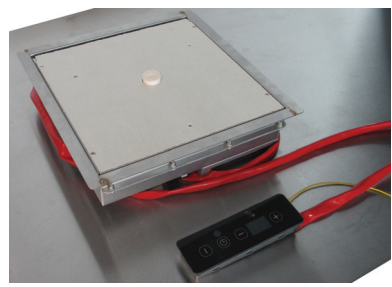

GL 650UC - 120 V

- ◆ Designed for under counter-top use with 3/4" Stone Countertop
- ◆ 650 watts - 50/60 Hz
- ◆ Remote Control panel: On/Off + (+/-) + lock
- ◆ 20 power levels
- ◆ Furnished with Induc'mate spacer to protect countertop

Geoline

GL 1800PBS or GL 1800/3000C - 120 V or 208/240 V

- ◆ Durable vitroceramic glass
- ◆ 1800/3000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Microtouch push button controls: On/Off + 20 power levels + (27) temperature levels + Timer
- ◆ Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer



GL2-3500/5000/6000/7000F - 208/240 V

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer (99 min)

GL2-3500/5000/6000/7000 - 208/240 V

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch control panel: On/Off + 20 power levels + Timer (99 min)



GL2-3500/5000/6000/7000DIR - 208/240 V

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Integral flush mounted stainless steel mounting frame
- ◆ Microtouch push button controls
- ◆ On/Off + 20 power levels + Timer + Boost