



# CONVECTION OVEN

## C O N C E P T

### COUNTERTOP CONVECTION OVENS

*From pastries to entrees...Bakes fast and evenly,  
intensifies and seals in flavor*

- ☐ Stainless steel exterior and interior construction
- ☐ Rear fan and heater assembly creates true convection pattern
- ☐ Unique air flow design ensures quick and uniform baking
- ☐ 450°F thermostat and 120 minute timer
- ☐ Safety glass door with handle
- ☐ Compact footprint
- ☐ Insulated exterior and door: FC-33/34/280/280V

### TEMPEST

**FC-33/1**

120 V

**FC-33**

208/240 V



\*TurboQuartz feature



#### Convection oven/broiler

All features of FC-34 with two quartz heating elements overhead - convection and broiling modes operate separately

**CAPACITY:** Same as FC-34 series

### BRIZA-V

**FC-280V/1**

120 V

**FC-280V**

208/240 V



#### CAPACITY:

3 slotted shelves and 1 drip pan included  
2 additional slotted shelves (optional)  
3 quarter size sheet pans (not included)

### WINDSTAR

**FC-280/1**

120 V

**FC-280**

208/240 V



**CAPACITY:** 2 wire racks and 1 bake tray included;  
4 bake trays (optional)  
3 quarter size sheet pans (not included)

### SIROCCO

**FC-34/1**

120 V

**FC-34**

208/240 V



**CAPACITY:** 3 wire racks and 1 drip pan included  
4 bake trays (optional)  
3 quarter size sheet pans (not included)



100 NIAN TIC AVENUE; SUITE 104 PROVIDENCE, RI 02907  
TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com  
www.equipex.com





## CONVECTION OVEN/BROILER

**FC-33/1**



**FC-33**

All features of FC-34 with two quartz heating elements overhead - convection and broiling modes operate separately

## CONVECTION OVENS

**FC-26, FC-26/1, FC-34, FC-34/1**

**FC-280V, FC-280V/1**

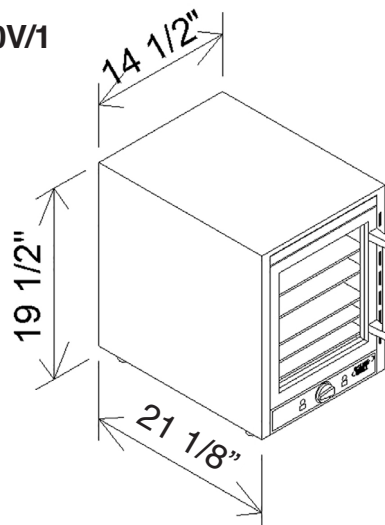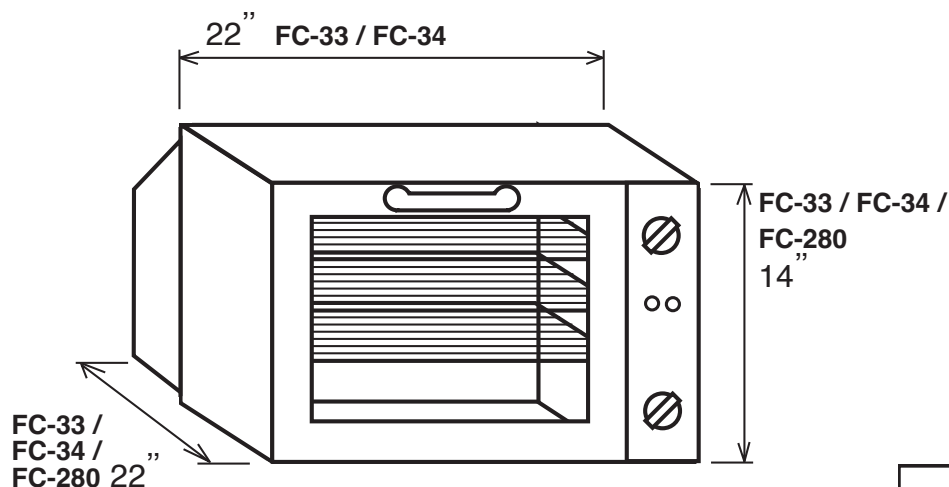

| MODEL           | SHELF SIZE (WxD)                                                    |
|-----------------|---------------------------------------------------------------------|
| FC-33/34 SERIES | 14 <sup>1</sup> / <sub>2</sub> " x 11 <sup>3</sup> / <sub>4</sub> " |
| FC-280 SERIES   | 12 <sup>1</sup> / <sub>4</sub> " x 12"                              |
| FC-280V SERIES  | 10" x 12"                                                           |

INSTALLATION CLEARANCE: 2" EACH SIDE, TOP AND 3" AT BACK

## SPECIFICATIONS

| MODEL     | ELECTRICAL                     | EXTERIOR DIMENSIONS                                                                                   | INTERIOR DIMENSIONS                                                                                       | SHIPPING WEIGHT | NEMA   |
|-----------|--------------------------------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------|--------|
| FC-33     | 208/240V, 1PH, 3KW, 13/15 Amps | 22"Wx22"Dx14"H                                                                                        | 16 <sup>3</sup> / <sub>8</sub> "Wx13 <sup>3</sup> / <sub>4</sub> "Dx10 <sup>3</sup> / <sub>8</sub> "H     | 45 lbs          | 6-15 P |
| FC-33/1   | 120V, 1.7KW, 15 Amps           | 22"Wx22"Dx14"H                                                                                        | 16 <sup>3</sup> / <sub>8</sub> "Wx13 <sup>3</sup> / <sub>4</sub> "Dx10 <sup>3</sup> / <sub>8</sub> "H     | 45 lbs          | 5-15 P |
| FC-34     | 208/240V, 1PH, 3KW, 13/15 Amps | 22"Wx22"Dx14"H                                                                                        | 16 <sup>3</sup> / <sub>8</sub> "Wx13 <sup>3</sup> / <sub>4</sub> "Dx10 <sup>3</sup> / <sub>8</sub> "H     | 45 lbs          | 6-15 P |
| FC-34/1   | 120V, 1.7KW, 15 Amps           | 22"Wx22"Dx14"H                                                                                        | 16 <sup>3</sup> / <sub>8</sub> "Wx13 <sup>3</sup> / <sub>4</sub> "Dx10 <sup>3</sup> / <sub>8</sub> "H     | 45 lbs          | 5-15 P |
| FC-280    | 208/240V, 1PH, 2KW, 7/9 Amps   | 18 <sup>1</sup> / <sub>2</sub> "Wx22"Dx14"H                                                           | 12 <sup>3</sup> / <sub>8</sub> "W x 12 <sup>3</sup> / <sub>8</sub> "D x 10 <sup>3</sup> / <sub>8</sub> "H | 44 lbs          | 6-15 P |
| FC-280/1  | 120V, 1.7KW, 15 Amps           | 18 <sup>1</sup> / <sub>2</sub> "Wx22"Dx14"H                                                           | 12 <sup>3</sup> / <sub>8</sub> "W x 12 <sup>3</sup> / <sub>8</sub> "D x 10 <sup>3</sup> / <sub>8</sub> "H | 44 lbs          | 5-15 P |
| FC-280V   | 208/240V, 1PH, 2KW, 7/9 Amps   | 14 <sup>1</sup> / <sub>2</sub> "Wx21 <sup>1</sup> / <sub>8</sub> "Dx19 <sup>1</sup> / <sub>2</sub> "H | 10 <sup>1</sup> / <sub>4</sub> "Wx12 <sup>5</sup> / <sub>8</sub> "Dx13"H                                  | 44 lbs          | 6-15 P |
| FC-280V/1 | 120V, 1.7KW, 15 Amps           | 14 <sup>1</sup> / <sub>2</sub> "Wx21 <sup>1</sup> / <sub>8</sub> "Dx19 <sup>1</sup> / <sub>2</sub> "H | 10 <sup>1</sup> / <sub>4</sub> "Wx12 <sup>5</sup> / <sub>8</sub> "Dx13"H                                  | 44 lbs          | 5-15 P |

\*All equipment must be plugged into a dedicated circuit of the proper ratings.

**WARRANTY: Limited one year parts and labor**



100 NIAN TIC AVENUE; SUITE 104 PROVIDENCE, RI 02907  
 TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com  
 www.equipex.com

