

ADVENTYS

INDUCTION

CONCEPT

INDUCTION COOKERS FOR PROFESSIONALS

High energy efficiency (90%) and your cooking area stays cool too!


- Stainless steel casing
- Drop-in installation
- Easy to clean remote microswitch touch controls with lexan cover
- Superior airflow and cooling fans permit all day use
- Two hobs: front-to-back or side-to-side
- Automatic pan detection / power supply monitor
- Controlled high temperature feature for stir fry and sauté
- Precision low temperature control for sauces and chocolates
- Empty pan security/automatic overheating protection
- Small article protection/oil auto ignition shutoff
- Removable grease filter to clean air intake



TWO HOB DROP-IN UNITS



GL2-3500DIR, GL2-5000DIR,
GL2-6000DIR, GL2-7000DIR

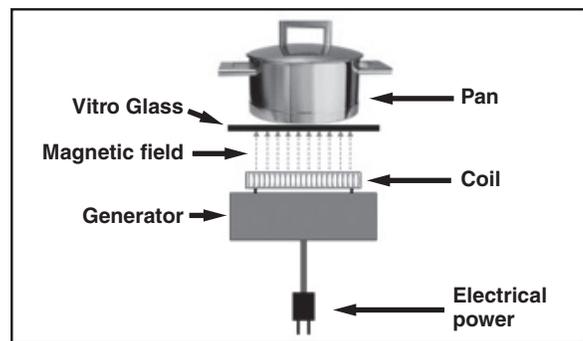

LYNX

TWO HOB DROP-IN UNITS



- Durable 4mm vitroceraamic glass
- Total Watts: 3500, 5000, 6000 or 7000 Watts
- Two (2) 8" Coils
- Integral flush mounted stainless steel mounting frame
- 20 power levels
- Power boost feature
- On/off and (+/-) features
- 99 min. timer

CONTROL PANEL OPTIONS



Recessed Remote Panel (standard)





Slanted surface mounted remote panel (optional)



765 WESTMINSTER STREET PROVIDENCE, RI 02903
TEL: (401)273-3300 FAX: (401) 273-3328 E-mail: sales@equipex.com
www.equipex.com



Induction Warmers and Cookers

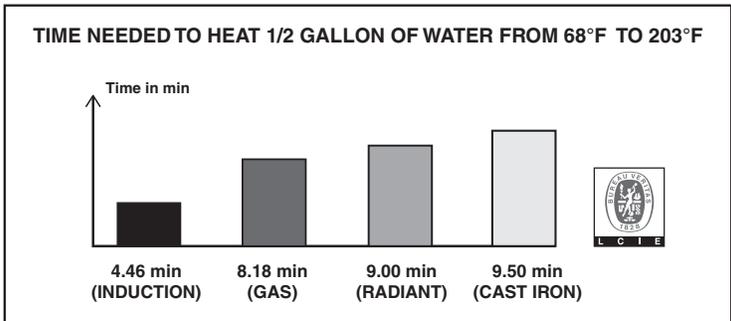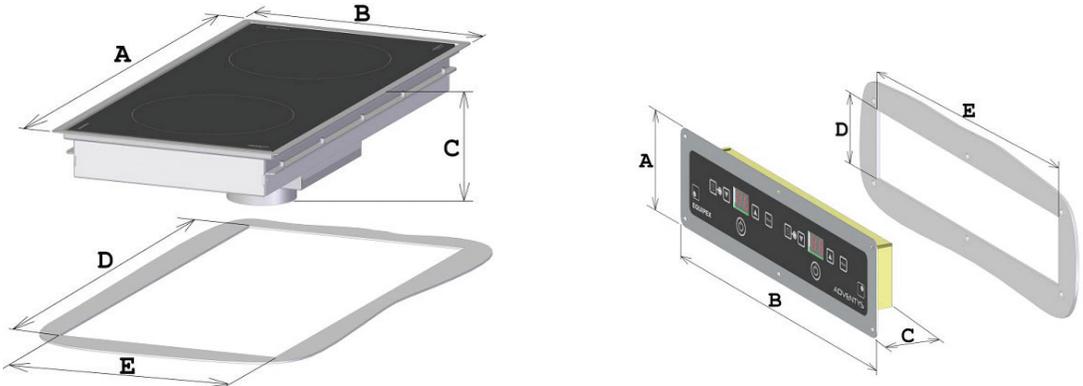

CLEARANCE AT SIDES: 2". CLEARANCE BELOW: 8" WITHOUT AIR INLET PIPE OR 4" WITH AIR INLET PIPE (4" DIAMETER PIPE)

INDUCTION TECHNOLOGY
How does it work? Induction is a basic principal of physics. When the electric current goes through a copper coil it creates a magnetic field. The pan attracts the magnetic field and creates heat. Induction technology is over **90% efficient**, therefore there is no waste of power or heat. As soon as the pan is removed, the induction unit turns off and **saves you energy**.

SPECIFICATIONS

NOTE: REQUIRES THE USE OF INDUCTION READY COOKWARE

MODEL	ELECTRICAL	DIMENSIONS A x B x C	CUTOUT SIZE D x E	SHIPPING WEIGHT	NEMA PLUG
GL2-3500DIR	208/240V, 1PH 3.5KW, 15/17 Amps	27½" x 13¾" x 7¼"	26½" x 13⅛"	40 lbs	L6 - 30P
GL2-5000DIR	208/240V, 1PH 5.0KW, 21/24 Amps	27½" x 13¾" x 7¼"	26½" x 13⅛"	40 lbs	L6 - 30P
GL2-6000DIR	208/240V, 1PH 6.0KW, 25/29 Amps	27½" x 13¾" x 7¼"	26½" x 13⅛"	40 lbs	6 - 50P
GL2-7000DIR	208/240V, 1PH 7.0KW, 37/42 Amps	27½" x 13¾" x 7¼"	26½" x 13⅛"	40 lbs	6 - 50P
<i>REMOTE CONTROL PANEL</i> with 6'-0" wire harness		3⅜" x 12¾" x 1¼"	2⅝" x 11⅛"	INCLUDED	INCLUDED

WARRANTY: Limited two-year parts and labor



765 WESTMINSTER STREET PROVIDENCE, RI 02903
 TEL: (401)273-3300 FAX: (401) 273-3328 E-mail: sales@equipex.com
 www.equipex.com