EQUIPEX

Induction Technology

Cooking Concepts for Professionals

ADVENTYS

100 Niantic Avenue; Suite 104, Providence, RI 02907
Tel: (401) 273 - 3300 Fax: (401) 273 - 3328
Email: sales@equipex.com
www.equipex.com

Bioline

BRIC 2500/3000/3600 - 208/240 V

- Durable vitroceramic glass
- Either 2500, 3000 or 3600 watts - 50/60 Hz
- Temperature in F° or 4 digit power level display
- Stainless steel casing
- 110 temperature levels (C°) / 198 temperature levels (F°)
- Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- 25 power levels

DWIC 3600 - 208/240 V

BWIC 3600 - 208/240 V

- Durable vitroceramic - Wok
- 3600 watts - 50/60 Hz
- Stainless steel casing
- Capacitive Touch control panel: On/Off + (+/-) with 2 digits display + 3 Presets + Timer (99 min) + 25 power levels
- Uniform temperature at bottom and sides
- Stainless steel edge frame protects glass and pan

Exclusive Drop-in

DRIC 2500/3000/3600 - 208/240 V

- Durable vitroceramic glass
- Either 2500, 3000 or 3600 watts - 50/60 Hz
- Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- Remote control panels available

Griddles

BGIC 3000/3600 - GLP6000 - DGIC 3000/3600

- Multi-layer griddle surface
- Capacitive touch controls
- 12 temperature levels
- Power output: 3000 - 6000 WATTS
- preheat to 400°F in 2 minutes
- Easy to clean
- 1 or 2 zone countertop
- 1 zone drop-in

Buffet

GL 650/1800/3000DI - 120 V or 208/240 V

- Durable vitroceramic glass
- 650/1800/3000 watts - 50/60 Hz
- Capacitive Touch control panel: On/Off + (+/-) + Timer (99 min)
- Option: Remote control panel - 9 power levels (GL650DI)
  - 20 power levels (GL1800/3000DI)

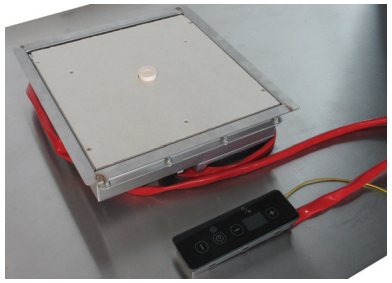

GL 650UC - 120 V

- Designed for under counter-top use with 3/4" Stone Countertop
- 650 watts - 50/60 Hz
- Remote Control panel: On/Off + (+/-) + lock
- 20 power levels
- Furnished with Induc'mate spacer to protect countertop

Geoline

GL 1800PBS or GL 1800/3000C - 120 V or 208/240 V

- Durable vitroceramic glass
- 1800/3000 watts - 50/60 Hz
- Stainless steel casing
- Microtouch push button controls: On\Off + 20 power levels + (27) temperature levels + Timer
- Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer

GL2-3500/5000/6000/7000F - 208/240 V

- Durable vitroceramic glass
- Two induction coils
- 3500/5000/6000/7000 watts - 50/60 Hz
- Stainless steel casing
- Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer (99 min)

GL2-3500/5000/6000/7000 - 208/240 V

- Durable vitroceramic glass
- Two induction coils
- 3500/5000/6000/7000 watts - 50/60 Hz
- Stainless steel casing
- Capacitive Touch control panel: On/Off + 20 power levels + Timer (99 min)

GL2-3500/5000/6000/7000DIR - 208/240 V

- Durable vitroceramic glass
- Two induction coils
- 3500/5000/6000/7000 watts - 50/60 Hz
- Stainless steel casing
- Integral flush mounted stainless steel mounting frame
- Microtouch push button controls
- On/Off + 20 power levels + Timer + Boost