

FOR DOORWAY OPENINGS - 34" to 60" WIDE

Single Compression Spring:
Chrome Vanadium


440C/300 Series
Stainless Steel
Cam-Roller

300 Series Polished
Stainless Steel
Mounting Plate

Wall Mounting
Plate

OVERLAP and COLORS

"U" Bracket



Metal
Air-Lock
Seal

Panel Selection

- ☐ Clear Standard
- ☐ Clear Polar Grade

Optional Colors


- ☐ Orange Polar Grade
- ☐ Gray Polar Grade
- ☐ Black Polar Grade
- ☐ White Polar Grade
- ☐ Blue Polar Grade

Panel Thickness


- Standard ☐ .080"
- Optional ☐ .120"

Anti-Curl Strip
Standard

OPTIONS

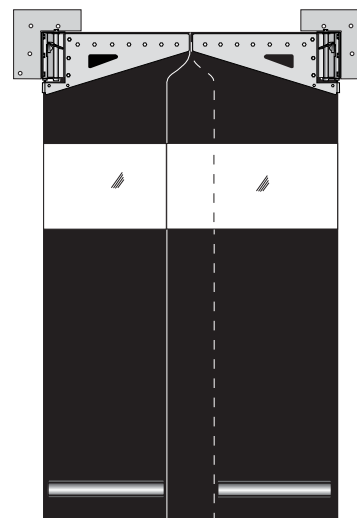


☐ Vision Strip

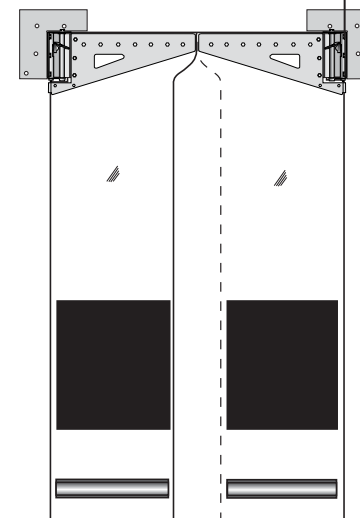

Impact Plates

- ☐ Front & Back
- ☐ Front Only
- ☐ Back Only

WALL MOUNTING PLATE DIMENSIONS

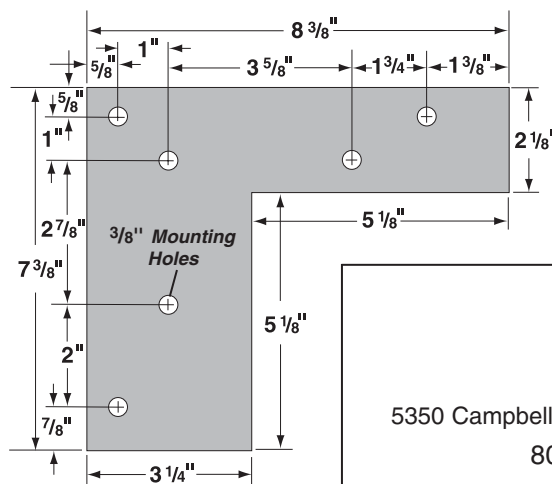

Curtron Products
a division of TMI LLC


5350 Campbells Run Road • Pittsburgh, PA 15205-9738
800-833-5005 • 412-787-9750

SAVE-T®



POLAR-PRO Swinging Doors

DOOR OPENING CONFIGURATIONS

Inside Surface Mounting


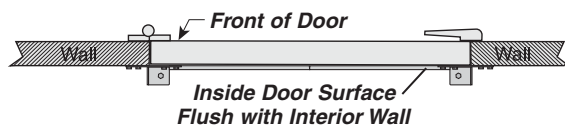


Whether the inside door surface
is flush with the inside wall surface
or
there is a *space* between the door
and wall, the Polar-Pro Swinging Door
FITS ALL!

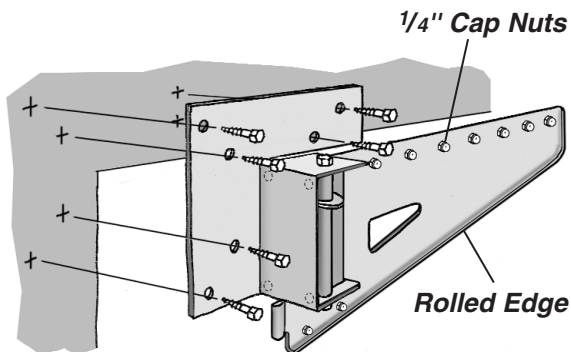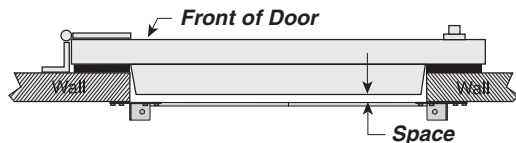



Wall/In-Jamb Mounting

With Wall Mounting Plate

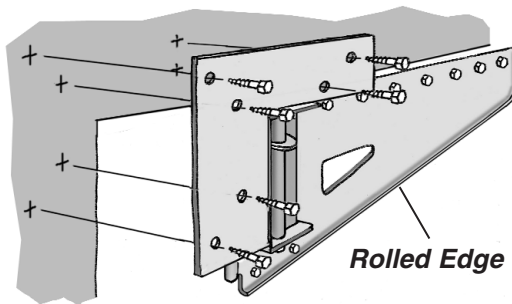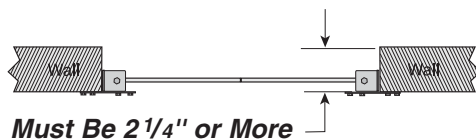


In-Jamb Mounting

With Wall Mounting Plate Removed

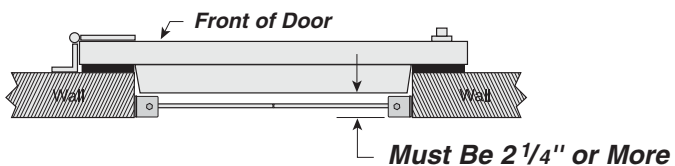

MEASURING YOUR DOOR

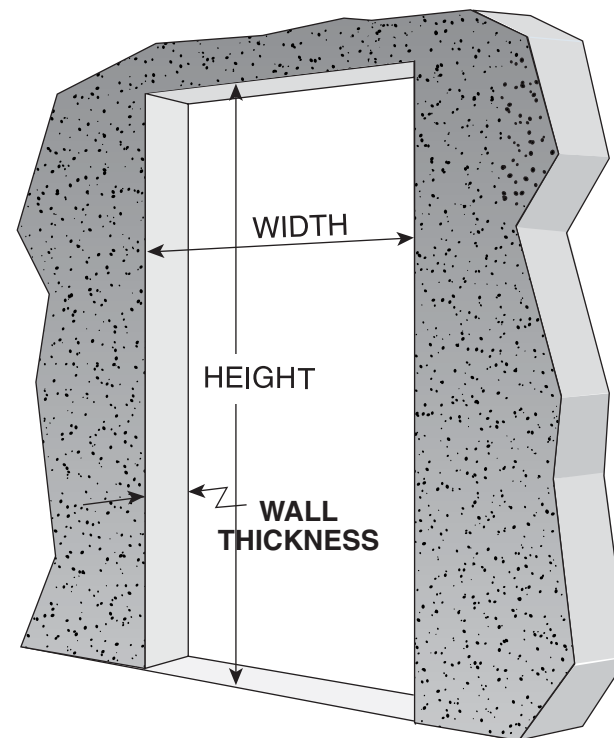

Door WIDTH in inches _____ "

Door HEIGHT in inches _____ "

WALL THICKNESS in inches _____ "

Curtron Products
a division of TML LLC

5350 Campbells Run Road • Pittsburgh, PA 15205-9738
800-833-5005 • 412-787-9750

SAVE-T® POLAR-PRO
Swinging Doors