

PROJECT NAME		LOCATION		AIA #
ITEM #	QTY	MODEL #		SIS #

# SPEC SERIES®

ROLL-THRU SOLID SWING DOOR HEATED CABINET

models	STR2HRT-2S-2S	STA2HRT-2S-2S	STG2HRT-2S-2S
--------	---------------	---------------	---------------




STR2HRT-2S-2S	
<b>Exterior</b>	Stainless steel door, front & sides.
<b>Interior</b>	Stainless steel side walls, back, floor, door liner, & ceiling.

STA2HRT-2S-2S	
<b>Exterior</b>	Stainless steel door, front & sides.
<b>Interior</b>	Aluminum side walls & back. Stainless steel floor & ceiling.

STG2HRT-2S-2S	
<b>Exterior</b>	Stainless steel door, with matching aluminum sides.
<b>Interior</b>	Aluminum side walls & back. Stainless steel floor & ceiling.

## plan view

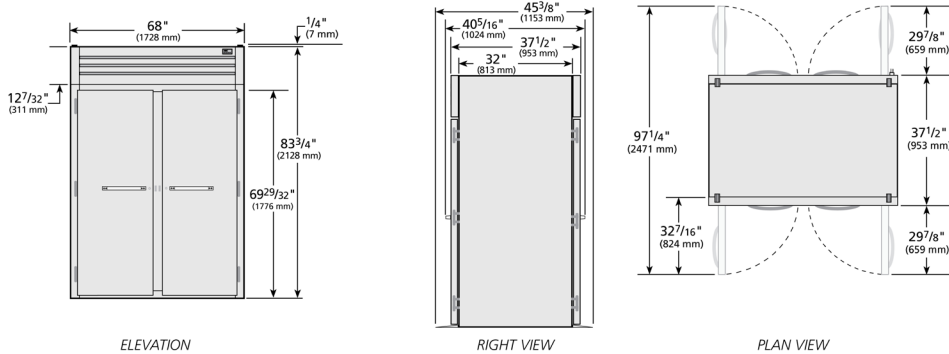

## SPECIFICATIONS

Dimensions	in.	mm.
Length	68	1728
Depth	37 1/2	953
Height	83 3/4	2128
<b>Electrical</b>	<b>U.S.</b>	<b>International</b>
Watts	4000	
Voltage	115/208-240/60/1	
NEMA	N/A	
Cord Length	N/A	N/A

† Depth does not include 4 1/8" (105 mm) for ramp each side.  
 \* Height does not include 1" (26 mm) for system mechanical components.  
 Note: Unit pre-wired at the factory ready to be hard-wired at the install location to a 115/208-240/60 Hz dedicated circuit.

Specifications subject to change without notice.  
 Chart dimensions are rounded up to the nearest 1/8" (millimeters rounded up to the next whole number).

MADE WITH INNOVATION IN THE USA

2/26 Printed in U.S.A.

APPROVALS

AVAILABLE AT



PROJECT NAME	LOCATION	AIA #
ITEM #	QTY	MODEL #
		SIS #

# SPEC SERIES®

ROLL-THRU SOLID SWING DOOR HEATED CABINET

models	STR2HRT-2S-2S	STA2HRT-2S-2S	STG2HRT-2S-2S
--------	---------------	---------------	---------------



## standard features

### HEATER SYSTEM

- Cabinet designed to provide holding temperatures of 140°F to 180°F (60°C to 82.2°C). Heating system controlled by exterior on/off switch and electronic temperature control.
- Two (2) stainless steel (for corrosion resistance), finned tube heating elements per section (1000 watts each) for uniform generation of electric heat. Cabinet comes with a total of 4000 watts.
- Equipped with low-velocity fans to assure even temperature distribution throughout the cabinet. Fans are controlled by exterior on/off switch.
- Manually controlled vent located on top of the cabinet for positive humidity control.

### CABINET CONSTRUCTION

- Stainless steel breaker caps.
- Insulation - Entire cabinet structure and solid door are foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

- One (1) heavy gauge stainless steel ramp per door.
- Designed to accept roll-in racks (inboard castors) with a maximum dimension of 27"L x 29"D x 66"H (686 mm x 737 mm x 1677 mm).

### DOORS

- Lifetime guaranteed bolt style door locks standard.
- Lifetime guaranteed heavy duty all metal working door handles.
- Positive seal self-closing doors with 120° stay open feature. Lifetime guaranteed external cam lift door hinges, Three (3) per door section.
- Magnetic door gasket of one piece construction, removable without tools for ease of cleaning.
- Field reversible hinge.

### LIGHTING

- Incandescent interior lighting; lights activated by exterior on/off switch, safety shielded.

### MODEL FEATURES

- Exterior, color coded, temperature display; accurate direct reading of internal cabinet temperature.

- Designed to hold warm baked or cooked food. Cabinet is not designed to heat ambient or cold product.
- Interior bumpers protect cabinet walls from abuse caused by roll-in carts.
- 12" x 20" (305 mm x 508 mm) pan for water included, if additional humidity is required.
- NSF/ANSI Standard 4 compliant for open food product.

### ELECTRICAL

- True requires that a sole use circuit be dedicated for the unit.
- Unit pre-wired at the factory ready to be hard-wired at the install location to a 115/208-240/60 Hz dedicated circuit.

### OPTIONAL FEATURES/ ACCESSORIES

- (upcharge & lead times may apply)*
- Security package.

METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Model	Elevation	Right	Plan	3D	Back
ST( )2HRT-1S-1S					