



Job: _____

Item No. _____

Remote Condensing Unit


Designed for High Volume Applications

- ✓ Outdoor rated, 2 HP condenser
- ✓ Galvanized all-weather enclosure
- ✓ Contractor mounted and wired
- ✓ High and low pressure controls mounted and wired separately
- ✓ Immersion type crankcase heater

SaniServ® Model ROC2361 (by Copeland®) Remote Condensing Unit, can be used with any **SaniServ®** remote ready dispensing unit.

Optional: 25', 50', and 75' pre-charged lines available

We reserve the right to change specifications and product designs without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

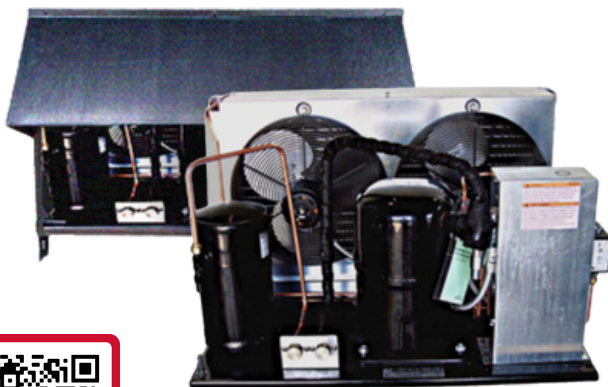

Dimensions: Width (31.4") Length (25.1")
Height (18.9") Shipping Weight (202 lbs)



SPECIFICATIONS

Mechanical

Condenser Type:	Air
Copevap Water Storage:	NA
Receiver Capacity (lbs):	10.3
Liquid Connection Size (in) / Type:	3/8 S
Suction Connection Size (in) / Type:	7/8 S
Discharge Line Size (in)	3/8
Water Inlet ()	
Water Outlet ()	
Oil Type:	POE
Oil Recharge Amount (oz):	45

Electrical

Max Fuse Size:	25
Min Circuit Ampacity:	17.8
Compressor:	CS14K6E-PFV-273
Compressor LRA - Low:	
Compressor LRA - High:	61.0
Compressor LRA - Half Winding:	
Compressor RLA:	12.4
Amps Per Motor:	0.85
Fan Motor Quantity:	2

Air - Cool Unit Performance

Release Date:	06-Jun-2002	Return Gas Temp. (°F)	40
Compressor:	CS14K6E-PFV-273 x 1	Subcooling (°F):	5
Performance No:	3755	Air Flow Rate (CFM):	1680

90°F Ambient Air Temperature

Evap Temp (°F)	Unit Capacity (Btu/hr)	Cond. Temp. (°F)	Temp. Diff (°F)
-5	9,030	105.5	15.5
0	10,400	107.4	17.4
5	11,900	108.8	18.8
10	13,400	110.6	20.6
15	14,900	112.4	22.4
20	16,400	114.1	24.1
25	17,900	115.9	25.9

ELECTRICAL				WIDTH	HEIGHT	DEPTH	WEIGHT	VOLUME
VOLTS	Hz	Ph.	Amps	INCHES (MM)	INCHES (MM)	INCHES (MM)	LBS. (Kg)	CU FT. (cu. m.)
208-230	60	1	20	17 (432)	29.3 (744)	23.9 (607)	220 (100)	
208-230	60	3	15					
Shipping Specifications				22.5 (571)	41 (1042)	34.5 (876)	280 (127)	18.5 (.53)