

# PizzaMaster® 900 series

Technical Specifications – Order Form

Make your choice

☐ PM 911 ☐ PM 912 ☐ PM 913 ☐ PM 914 ☐ PM 915  
☐ PM 921 ☐ PM 922 ☐ PM 923 ☐ PM 924 ☐ PM 925  
☐ PM 931 ☐ PM 932 ☐ PM 933 ☐ PM 934 ☐ PM 935  
☐ PM 941 ☐ PM 942 ☐ PM 943 ☐ PM 944 ☐ PM 945

PizzaMaster\_900series\_Technical Specifications 90007\_EN\_R1C

## Modular Electric Pizza Ovens

FULL SIZE, versatile and high efficient – stone hearth ovens




- 80 Different Sizes  
*Including Modular and CounterTop ovens*
- High Power
- High Temperature
- Special Clay Hearthstone
- Unique Scandinavian Design
- “Extra” is Standard
- Smart Unique Options
- International Certificates

### Standard equipment

- Dual halogen lighting in each deck
- Hearth of natural material with crisping function
- Stainless steel front
- Turbo start function
- Legs with lockable castors  
*castors not on 5 deck ovens*
- Indicators for thermostat, turbo-start and service
- Retractable frontal unloading shelf *not 4 / 5 deck oven and 3 deck oven with UBC*
- Eyebrow hood
- See-through oven door with heat-reflecting glass
- 400°C / 752°F as standard
- Digital Display *ED model only*
- Timer with manual shut-off alarm *ED model only*
- Auto-Timer with alarm *ED model only*
- Classic display *E model only*

### External and Internal dimensions, kW and stones per deck for models

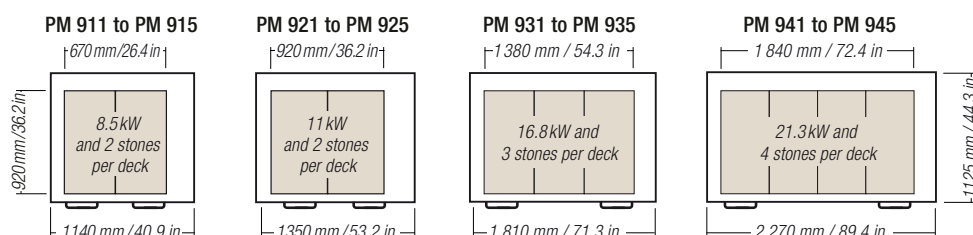

### Mandatory fields

#### Available displays



☐ Digital - ED model



☐ Classic - E model

#### Electrical connection

- |                                     |                                     |
|-------------------------------------|-------------------------------------|
| <input type="checkbox"/> 230V 1ph   | <input type="checkbox"/> 240V 1ph   |
| <input type="checkbox"/> 230V 3ph   | <input type="checkbox"/> 240V 3ph   |
| <input type="checkbox"/> 400V 3ph+N | <input type="checkbox"/> 480V 3ph+N |
| <input type="checkbox"/> 200V 3ph   | <input type="checkbox"/> 400V 3ph   |
| <input type="checkbox"/> 208V 1ph   | <input type="checkbox"/> 460V 3ph   |
| <input type="checkbox"/> 208V 3ph   |                                     |

### Optional equipment

#### Make your choice

- ☐ Clock timer
- ☐ Marine model
- ☐ Disassemble-able 2 deck oven
- ☐ Extra sliding shelf (not on UBC)
- ☐ Peel holder
- ☐ Oil and spice rack
- ☐ Side shelf ..... up to 4 shelves per oven  
*Not on 4 / 5 deck ovens*

#### PizzaMaster design solution

- ☐ Phantom Black
- ☐ Royal Gold

#### Semi-automatic door opener\*

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Add ovens width with 200 mm / 8 in.  
Requires separate 3ph supply.

#### Power Guard\*

- |        |                                 |                                            |
|--------|---------------------------------|--------------------------------------------|
| Deck 1 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary (lower) |
| Deck 2 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 3 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 4 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |
| Deck 5 | <input type="checkbox"/> Master | <input type="checkbox"/> Secondary         |

\*Sold in pair only  
(1 master deck + 1 secondary deck)

#### Steam system\*

- ☐ Deck 1 (lower)
  - ☐ Deck 2
  - ☐ Deck 3
  - ☐ Deck 4
  - ☐ Deck 5
- \*Not in combination with high temperature deck.  
Add ovens depth with 100 mm / 4 in.

#### High temperature deck\*

500°C / 932°F

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Not in combination with extra high deck and/or steam system

#### Extra high deck\*

- ☐ Deck 1 (lower)
- ☐ Deck 2
- ☐ Deck 3
- ☐ Deck 4
- ☐ Deck 5

\*Not in combination with high temperature deck

#### UBC (Under built cabinet)\*

- \*UBC not available on 4 / 5 deck ovens
- ☐ UBC (Standard)
- ☐ UBC - P (Proofer cabinet)  
*Not US/CAN markets*

### Approvals available



**2 YEAR  
WARRANTY**

COMMERCIAL COOKING APPLIANCE

Limited

# PizzaMaster®



# PizzaMaster® 900 series

Technical Specifications – Installation Guide

PM 911 PM 912 PM 913 PM 914 PM 915  
PM 921 PM 922 PM 923 PM 924 PM 925  
PM 931 PM 932 PM 933 PM 934 PM 935  
PM 941 PM 942 PM 943 PM 944 PM 945

## PizzaMaster® 900 series

PizzaMaster\_900series\_Technical Specifications 90007\_EN\_R1C

| Model  | Dimensions in millimetres<br>Width x Depth x Height *a) |          | Dimensions in inches<br>Width x Depth x Height *a) |          | Decks     | Power<br>kW per<br>deck | Capacity (pizzas per deck) |                 |                 |                 | Weight<br>Kg / lb |
|--------|---------------------------------------------------------|----------|----------------------------------------------------|----------|-----------|-------------------------|----------------------------|-----------------|-----------------|-----------------|-------------------|
|        | External                                                | Internal | External                                           | Internal |           |                         | 254 mm<br>10 in            | 355 mm<br>14 in | 406 mm<br>16 in | 457 mm<br>18 in |                   |
| PM 911 | 1040 x 1125                                             | x 480    | 670 x                                              | x 18.9   | 26.4 x    | 8.5                     | 6                          | 3               | 2               | 1               | 203 / 447         |
| PM 912 |                                                         | x 820    | 920 x                                              | x 32.3   | 36.2 x    |                         |                            |                 |                 |                 | 281 / 619         |
| PM 913 |                                                         | x 1160   | 210 ---                                            | x 45.7   | 8.2 ---   |                         |                            |                 |                 |                 | 354 / 780         |
| PM 914 |                                                         | x 1500   | Opt. high                                          | x 59.1   | Opt. high |                         |                            |                 |                 |                 | 426 / 939         |
| PM 915 |                                                         | x 1840   | deck=245                                           | x 72.5   | deck=9.6  |                         |                            |                 |                 |                 | 515 / 1135        |
| PM 921 | 1350 x 1125                                             | x 480    | 920 x                                              | x 18.9   | 36.2 x    | 11.0                    | 12                         | 5               | 4               | 4               | 243 / 535         |
| PM 922 |                                                         | x 820    | 920 x                                              | x 32.3   | 36.2 x    |                         |                            |                 |                 |                 | 330 / 727         |
| PM 923 |                                                         | x 1160   | 210 ---                                            | x 45.7   | 8.2 ---   |                         |                            |                 |                 |                 | 441 / 927         |
| PM 924 |                                                         | x 1500   | Opt. high                                          | x 59.1   | Opt. high |                         |                            |                 |                 |                 | 539 / 1188        |
| PM 925 |                                                         | x 1840   | deck=245                                           | x 72.5   | deck=9.6  |                         |                            |                 |                 |                 | 638 / 1406        |
| PM 931 | 1810 x 1125                                             | x 480    | 1380 x                                             | x 18.9   | 54.3 x    | 16.8                    | 18                         | 8               | 6               | 6               | 282 / 621         |
| PM 932 |                                                         | x 820    | 920 x                                              | x 32.3   | 36.2 x    |                         |                            |                 |                 |                 | 431 / 950         |
| PM 933 |                                                         | x 1160   | 210 ---                                            | x 45.7   | 8.2 ---   |                         |                            |                 |                 |                 | 580 / 1278        |
| PM 934 |                                                         | x 1500   | Opt. high                                          | x 59.1   | Opt. high |                         |                            |                 |                 |                 | 729 / 1607        |
| PM 935 |                                                         | x 1840   | deck=245                                           | x 72.5   | deck=9.6  |                         |                            |                 |                 |                 | 878 / 1935        |
| PM 941 | 2270 x 1125                                             | x 480    | 1840 x                                             | x 18.9   | 72.4 x    | 21.3                    | 24                         | 11              | 8               | 8               | 412 / 908         |
| PM 942 |                                                         | x 820    | 920 x                                              | x 32.3   | 36.2 x    |                         |                            |                 |                 |                 | 665 / 1466        |
| PM 943 |                                                         | x 1160   | 210 ---                                            | x 45.7   | 8.2 ---   |                         |                            |                 |                 |                 | 920 / 2028        |
| PM 944 |                                                         | x 1500   | Opt. high                                          | x 59.1   | Opt. high |                         |                            |                 |                 |                 | 1173 / 2586       |
| PM 945 |                                                         | x 1840   | deck=245                                           | x 72.5   | deck=9.6  |                         |                            |                 |                 |                 | 1427 / 3145       |

\*a) Model deck height For total oven height = Model deck height + leg and casters height + eyebrow hood

### IMPORTANT!

All installations and services must comply to local and national codes and be carried out by qualified servicers and electricians only.

#### Placement

Oven must be installed with a clearance of 50 mm / 2 in towards all sides.

#### Electrical

For wire dimension (mm2/AWG) see ovens connecting terminal and/or the manual.

#### Ventilation


Min. 200 m3/h / 115 CFM per deck / connection. (Connection Ø100 mm / Ø3.95in).

#### Water

Pressure between 1-6 bar (0.1-0.6 MPa). Connection G ¾ " / NH ¾ " (for US/CAN).

#### Connections

Ventilation Water Electrical  
(deck)



Ventilation (eyebrow hood)

### Amps per phase and Deck <sup>(1)</sup> or Oven <sup>(2)</sup> for ovens with – Power Guard, see <sup>(3)</sup> – Door Opener, see <sup>(4)</sup>

| Model  | 230V<br>1ph+N | 230V<br>3ph | 400V 3ph+N |           | 200V<br>3ph | 208V<br>1ph | 208V<br>3ph | 240V<br>1ph | 240V<br>3ph | 480V 3ph+N |           | 400V<br>3ph | 460V<br>3ph<br>(440-480) |
|--------|---------------|-------------|------------|-----------|-------------|-------------|-------------|-------------|-------------|------------|-----------|-------------|--------------------------|
|        | (1)           | (1)         | (1)        | (2)       | (1)         | (1)         | (1)         | (1)         | (1)         | (1)        | (2)       | (1)         | (1)                      |
| PM 911 | 33.4          | 19.4        | 11.3       | 11.3      | 20.6        | 37.0        | 21.4        | 34.9        | 20.2        | 9.4        | 9.4       | 11.2        | 9.7                      |
| PM 912 |               |             |            | 22.5      |             |             |             |             |             |            | 18.7      |             |                          |
| PM 913 |               |             |            | 33.7      |             |             |             |             |             |            | 28.0      |             |                          |
| PM 914 |               |             |            | 34.0+11.1 |             |             |             |             |             |            | 28.3+9.3  |             |                          |
| PM 915 |               |             |            | 34.4+22.2 |             |             |             |             |             |            | 28.6+18.5 |             |                          |
| PM 921 | 47.7          | 27.6        | 15.9       | 15.9      | 29.3        | 52.7        | 30.5        | 49.7        | 28.7        | 13.2       | 13.2      | 15.9        | 13.8                     |
| PM 922 |               |             |            | 31.8      |             |             |             |             |             |            | 26.4      |             |                          |
| PM 923 |               |             |            | 47.7      |             |             |             |             |             |            | 39.6      |             |                          |
| PM 924 |               |             |            | 48.1+15.9 |             |             |             |             |             |            | 39.9+13.2 |             |                          |
| PM 925 |               |             |            | 48.4+31.8 |             |             |             |             |             |            | 40.2+26.4 |             |                          |
| PM 931 | 73.2          | 42.4        | 24.5       | 24.5      | 45.1        | 81.0        | 46.9        | 76.4        | 44.2        | 20.4       | 20.4      | 24.4        | 21.2                     |
| PM 932 |               |             |            | 49.0      |             |             |             |             |             |            | 40.7      |             |                          |
| PM 933 |               |             |            | 73.4      |             |             |             |             |             |            | 61.0      |             |                          |
| PM 934 |               |             |            | 73.4+24.5 |             |             |             |             |             |            | 61.0+20.4 |             |                          |
| PM 935 |               |             |            | 73.5+49.0 |             |             |             |             |             |            | 61.1+40.7 |             |                          |
| PM 941 | 92.8          | 53.7        | 31.0       | 31.0      | 57.1        | -           | 59.4        | 96.8        | 56.0        | 25.8       | 25.8      | 30.9        | 26.9                     |
| PM 942 |               |             |            | 62.0      |             |             |             |             |             |            | 51.5      |             |                          |
| PM 943 |               |             |            | 93.0      |             |             |             |             |             |            | 77.2      |             |                          |
| PM 944 |               |             |            | 93.0+31.0 |             |             |             |             |             |            | 77.2+25.8 |             |                          |
| PM 945 |               |             |            | 93.1+62.0 |             |             |             |             |             |            | 77.3+51.5 |             |                          |

(1) Amps per phase and deck (1 power supply cable per oven deck).

(2) Amps per phase and oven, 1-3 decks (1 power supply cable per oven) 4-5 deck (2 power supply cables per oven).

(3) Power Guard is sold in pair (Primary and Secondary deck) and reduce max. Amp draw for 2 decks with 50%.

(4) Door Opener require 1 separate 3phase, same voltage as main oven supply. Supplies up to 5 deck. Amp draw 1 A / deck / phase.

### Distributor

#### Built for Extreme Temperature



PM 911 / 921 / 931 / 941




PM 912 / 922 / 932 / 942



PM 913 / 923 / 933 / 943



PM 914 / 924 / 934 / 944



PM 915 / 925 / 935 / 945

3, 4 and 5 deck ovens are as standard disassemble-able for easy installations

Disassemble-able, optional



# PizzaMaster®

