



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

SELF-CONTAINED PREMIUM INDOOR/OUTDOOR ICE MACHINES

MODEL: ☐ MIM50P ☐ MIM50P-0



MIM50P



MIM50P-0

The Maxx Ice MIM50P Premium series of indoor/outdoor ice machines produce up to 65 pounds of ice per day (under ideal conditions). These stylish, durable and easy to install models are perfect for any freestanding or built-in application.

FEATURES AND CONSTRUCTION

- Stainless steel / black painted steel (MIM50P) or all stainless steel (MIM50P-0) exterior
- Air-cooled compressor
- Solid state controls
- Built-in self cleaning mode
- Automatic overflow prevention
- 25 lb storage bin
- Drain pump and internal blue LED light are included
- Field reversible door
- Adjustable durable feet
- Includes ice scoop & tubing for supply and drain lines

DAILY ICE PRODUCTION

Air Temp 70°F (21°C) / Water Temp 50°F (10°C)

MIM50P 65 lbs (29.5 kg)

MIM50P-0 65 lbs (29.5 kg)

Air Temp 90°F (32°C) / Water Temp 70°F (21°C)

MIM50P 51 lbs (23 kg)


MIM50P-0 51 lbs (23 kg)

ELECTRIC

120V / 60Hz / 1Ph

International voltage available

6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

3RD PARTY APPROVALS



Certified to ANSI NSF 12



Certified to ANSI UL 563



DOE 2018 Compliant



Meets Energy Star Guidelines



Zero Ozone Depletion Potential

MAXX ICE WARRANTY (USA / CANADA)

Contact Maxx Ice for warranty statement at

TechnicalServices@TheLegacyCompanies.com or 877.368.2797

ICE BIN STORAGE CAPACITY

MIM50P 25 lbs (11 kg)

MIM50P-0 25 lbs (11 kg)

OPERATING REQUIREMENTS

Ambient Air Temperature Range..... 50° to 100°F (10° to 38°C)

Water Temperature Range 41° to 90°F (5° to 32°C)

Water Usage per 100 lbs of ice..... 13.8 Gallons (52.2L)

Water Supply Line Connection 1/4" O.D. Compression

Water Pressure Range:

Min PSI..... 15

Max PSI 75*

Min Bar 1.0

Max Bar..... 5.5

*Above 75 PSI requires a regulator

Energy Consumption per 100 lbs of ice:


MIM50P 10.1 kWh/100 lbs

MIM50P-0 10.1 kWh/100 lbs



MAXX ICE

SELF-CONTAINED PREMIUM INDOOR/OUTDOOR ICE MACHINES

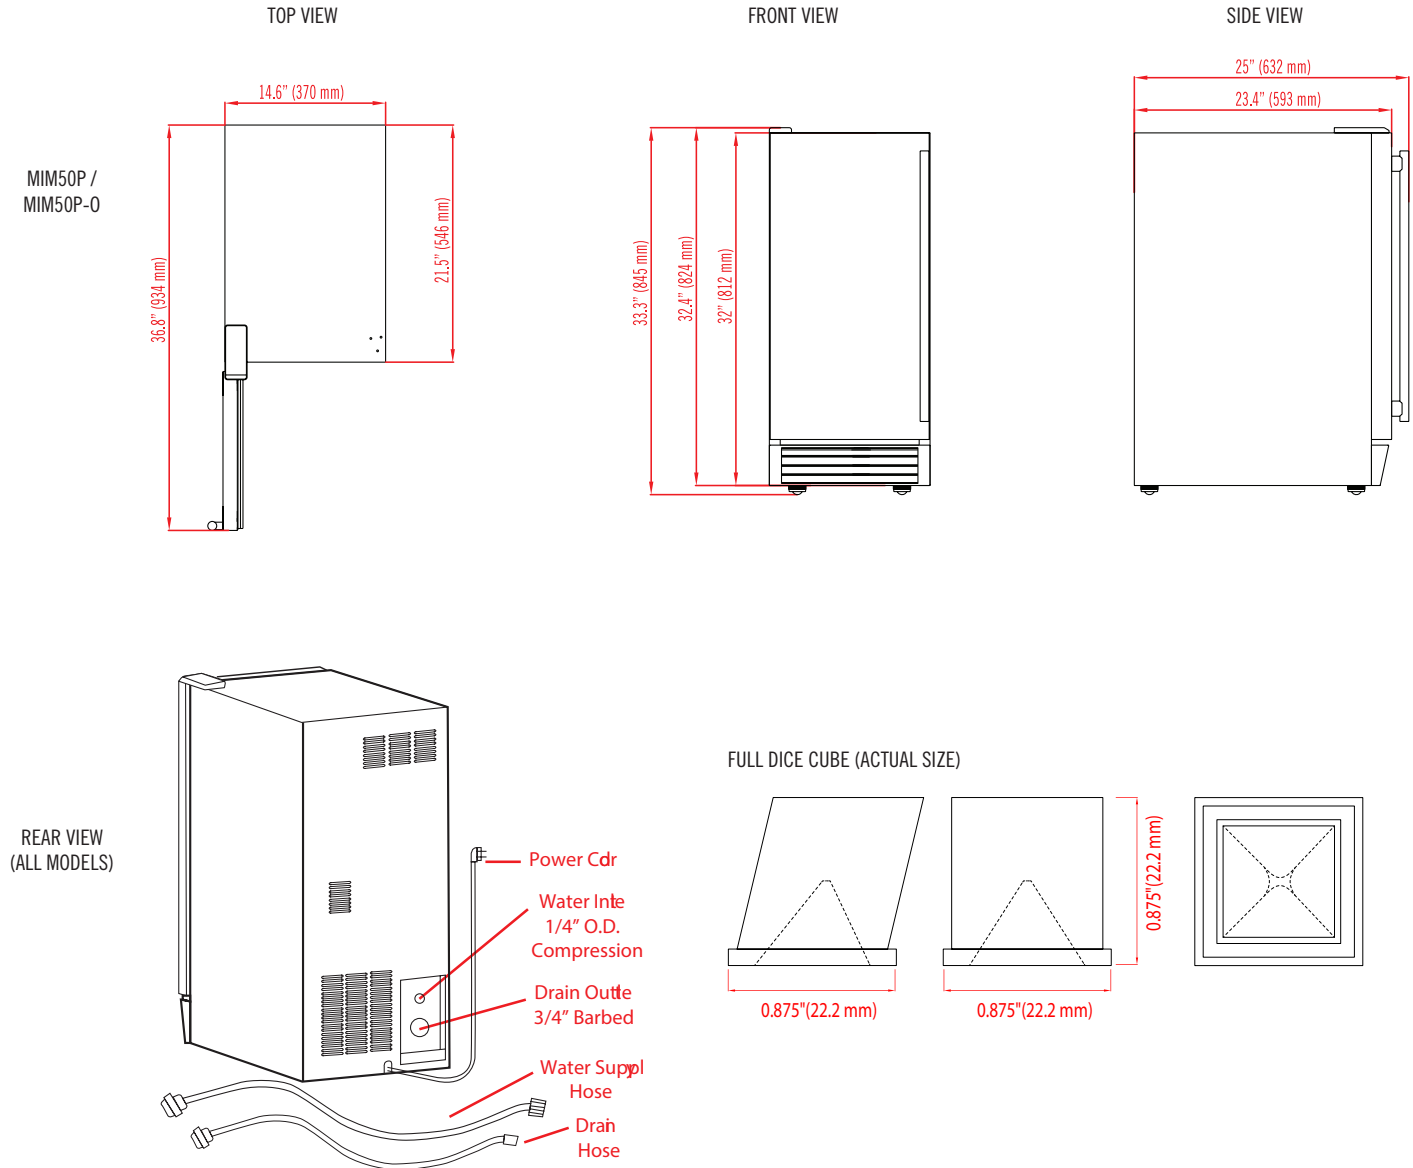

MODEL	EXTERNAL DIMENSIONS	DAILY ICE PRODUCTION (70°F Air / 50°F Water)	ICE BIN STORAGE CAPACITY	NET WEIGHT / SHIPPING WEIGHT	AMP DRAW (MAKING / HARVESTING)	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MIM50P	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	92 lbs (41.7 kg) 101 lbs (45.8 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph
MIM50P-0	14.6" x 25" x 33.3" (370 x 632 x 845 mm)	65 lbs (29.5 kg)	25 lbs (11 kg)	92 lbs (41.7 kg) 101 lbs (45.8 kg)	3A / 4A	R-134a 3.88oz (110g)	115V / 60Hz / 1Ph

INSTALLATION

- A clearance of 2" from the wall is recommended to promote adequate cooling air circulation
- A gravity drain line is required to install this ice machine
- For optimal performance, the use of a water filter is recommended