

BLACK♦DIAMOND

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

FULL SIZE GAS CONVECTION OVEN

MODEL: ☐ BDCOF-60/NG



BDCOF-60/NG

Black Diamond's Full Size Gas Convection Oven is ideal for any high volume restaurant or food service establishment.

Constructed of stainless steel, this oven operates with a forced air, two speed fan motor system with a cool down feature. The interior of the oven has a 10 position rack guide and fits full size sheet pans. Electronic controls featuring a 60 minute timer and manual temperature knob. The double pane glass doors have a interlock switch that automatically turns the fan and burners off when they are opened. Includes steel legs with a powder black finish and adjustable bullet feet.

FEATURES AND CONSTRUCTION

- Double pane thermal glass windows on doors
- Steel legs with a powder black finish and adjustable bullet feet
- Doors have an interlock switch that automatically turns the fan and burners off when open
- ¾" rear NPT gas connection
- 19.7" long steel legs with a durable powder black coating
- Adjustable bullet feet
- Optional casters sold separately
- Two speed fan motor: High - 1/2 HP; Low - 1/4 HP
- Cooking chamber is lined with porcelain enamel
- A 10 position guide rack with 1.5" spacing in between
- Includes 5 heavy duty adjustable chrome plated racks
- Seamless interior and corners for easy cleaning

ELECTRIC

120V/60Hz/1Ph

3RD PARTY APPROVALS



Intertek




Intertek

BLACK DIAMOND WARRANTY (USA / CANADA)

These units are backed by a 1-year limited parts and labor (parts only warranty for Canada). For warranty, non-warranty related issues, and technical support call NSA at 877-672-7740 or contact support@admiralcraft.com.

Manufacturer recommends an external regulator (not included)
Conversion kits available

BLACK DIAMOND FULL SIZE GAS CONVECTION OVEN

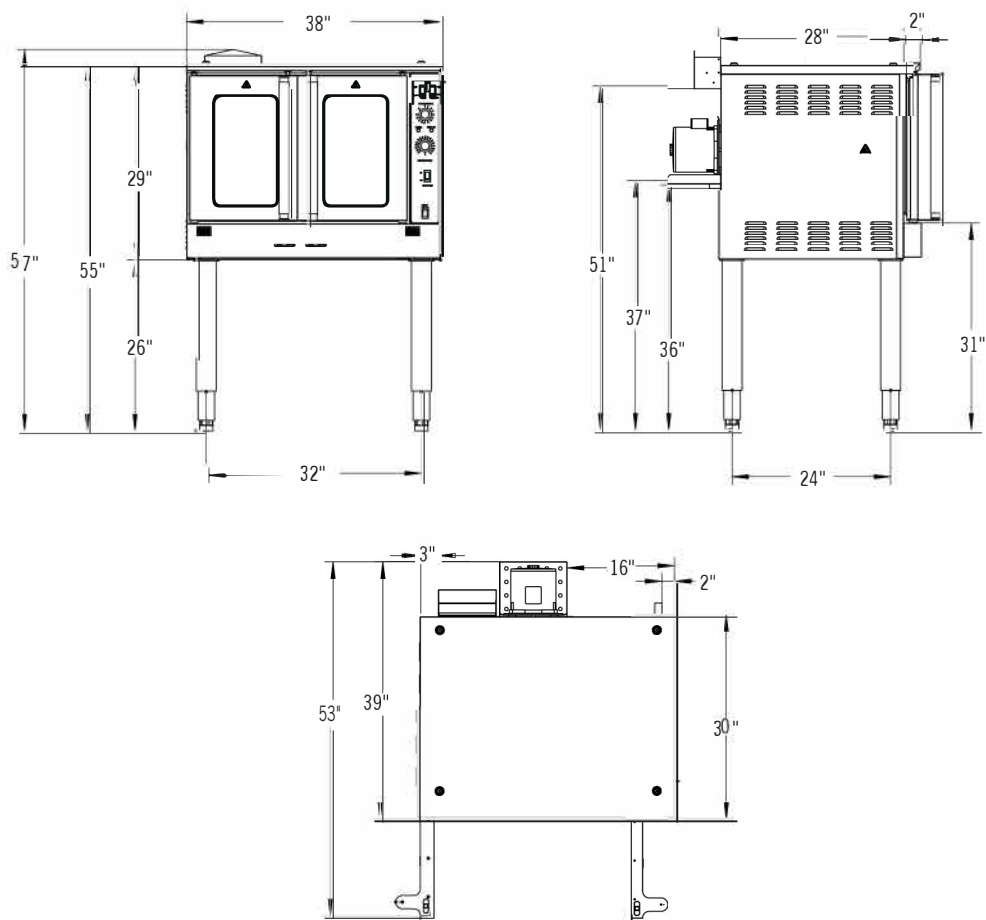

Model Number	BDCOF-60/NG
Doors	2
Racks	5
Overall Dimensions (in)	42"L x 38"W x 57"H
Interior Dimensions (in)	21.5"L x 29"W x 20"H
Horsepower	Two speed fan: High - 1/2; Low - 1/4
Temperature Range	150°F – 550°F
Voltage/Hertz/Phase	120V/60Hz/1
Total BTU	60,000 BTU
Net Weight (lbs)	507
Gross Weight (lbs)	569
Shipping Dimensions (in)	43.3"L x 46.5"W x 38.6"H