Nuova Distribution USA, LLC
6940 Salashan Parkway, Building A • Ferndale, WA 98248
www.nuovadistribution.com • (p) 360-366-2226 • (f) 360-366-4015

Prontobar Touch Spec Sheet

Water Requirements


- 3/8” dedicated cold water line with shut-off valve and compression fitting.
- Water hardness cannot exceed 3gpg or 50 ppm. If water hardness exceeds 3gpg a water softener must be installed.
- Minimum incoming water flow rate of 35 GPH and maximum line pressure of 36 PSI / 3 BAR - regulator not provided.

Water Softening Equipment

1. Water Softener Capacity: Single - 4400 gpg
2. Water Softener Capacity: Double - 8800 gpg
3. Water Softener Capacity: Triple - 13200 gpg
4. Water Softener Capacity: Automatic - Programmable
5. Water Softener Capacity: Manual - 4400 gpg

Power Requirements

- Volts: 220 (voltage range of 208-240)
- Watts: 2800
- Amp draw: 13
- Receptacle: Nema 6-20


Nema 6-20

NSF / ANSI Std.4

The average water consumption of this machine is 4 gallons per day, which represents 128 drinks at 4oz per drink.

Water Softener/Maintenance Calculation

Cartridge Grain Capacity	÷	Water Hardness (grains per gallon)	=	Gallon Capacity of Cartridge	÷	Gallons of Water Used per Day	=	Days Until Cartridge Needs to be Replaced
_____	÷	_____	=	_____	÷	_____	=	_____


Counter Space Requirements

- Height: 25 inches
- Depth: 21 inches
- Width: 13 inches

Drain Requirements

- Open gravity drain of minimum 1.25 inch I.D., within 4 feet of the machine.

Countertop Drain Hole Location

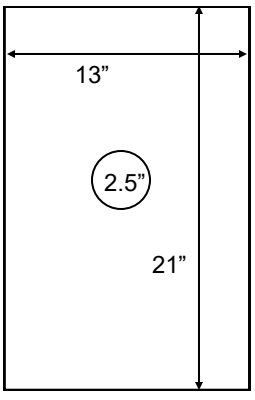



I, the customer, understand that these requirements must be in when the installer arrives. Failure to have the site ready will result in additional service and travel charges, and may cause further delays in installation.

Customer Name: _____ Signature: _____

Company Name: _____

Phone: _____ Fax: _____ Email: _____