




ICONIC BRANDS, LEADING INNOVATION

**Bottle Coolers
Beer Tower Dispensers**

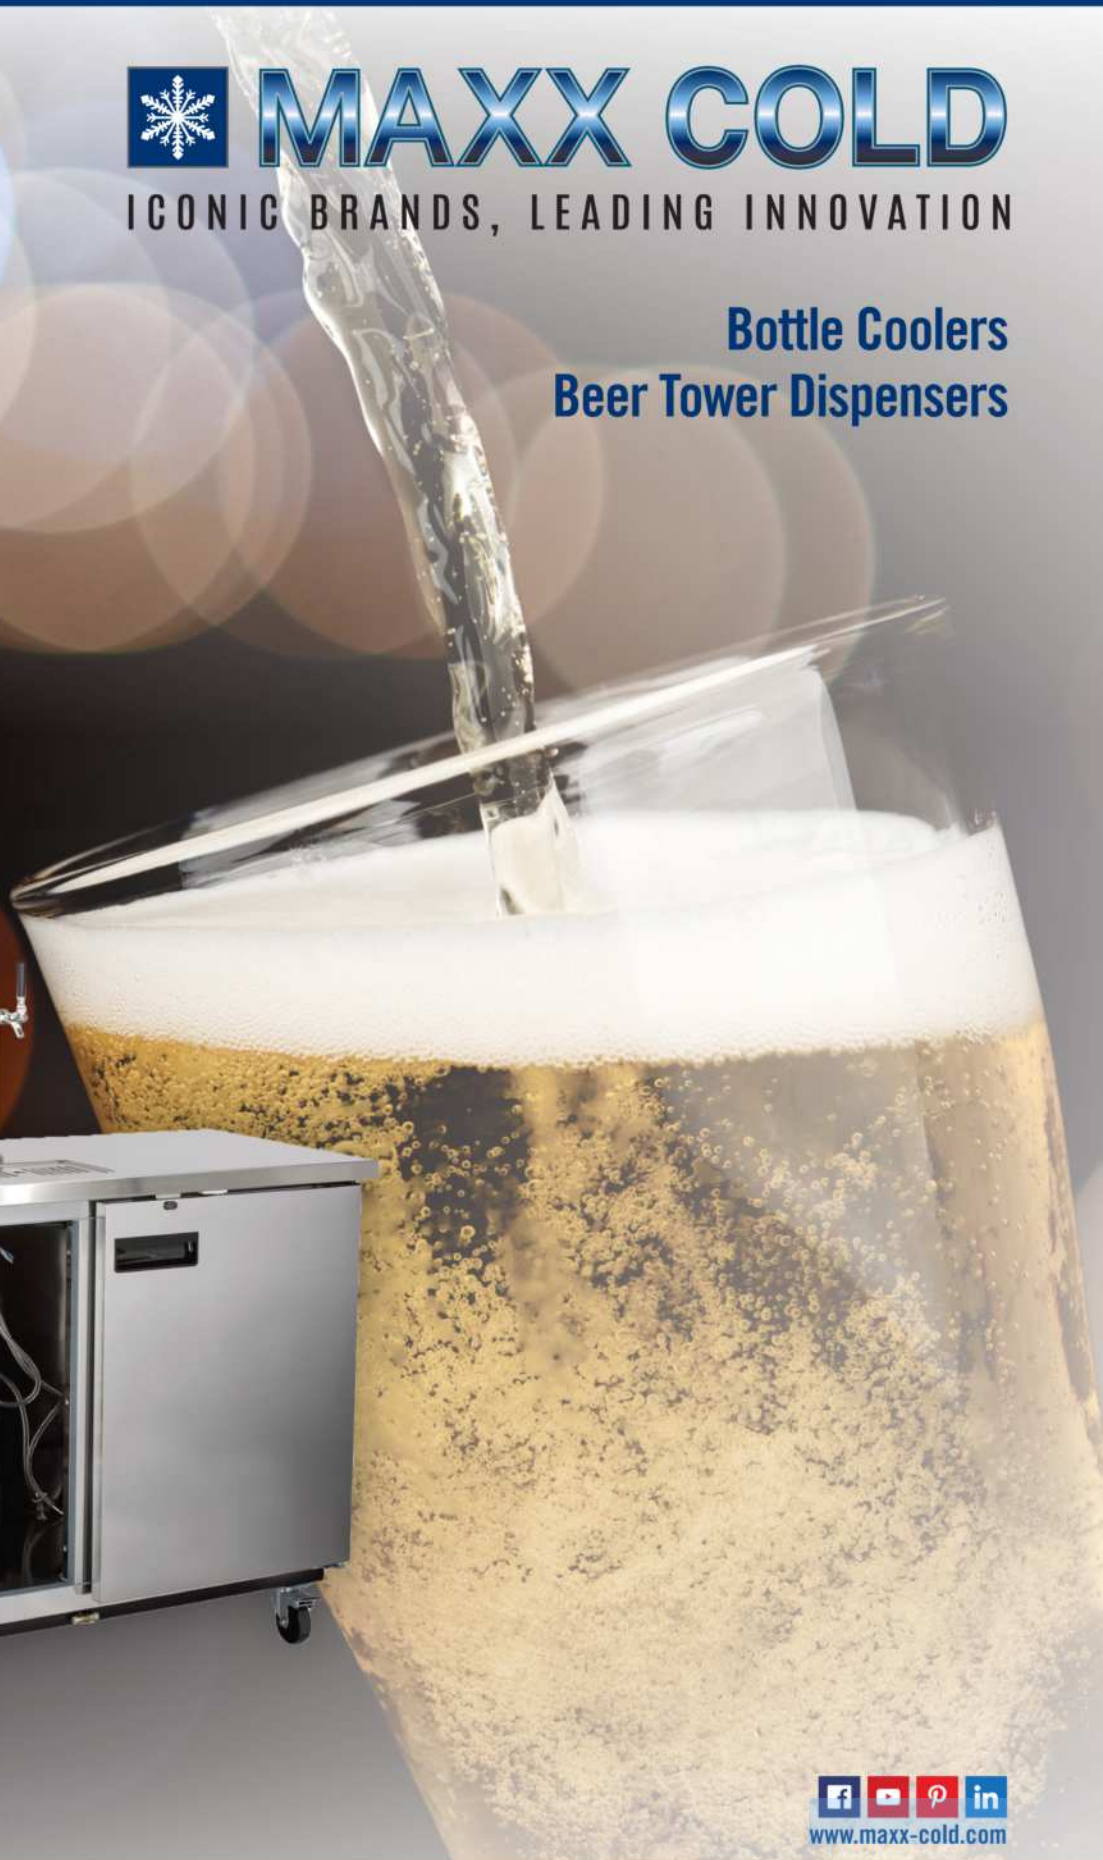

MCSBBC
051822

3355 Enterprise Avenue, Suite 160 | Fort Lauderdale, FL 33331
Tel: 954.202.7419 | Fax: 954.202.7337 | www.maxx-cold.com

A DIVISION OF
THE LEGACY COMPANIES 



MXBD48-2BHC
47.5"W x 24.4"D x 56"H

MXBD60-2BHC
61.06"W x 24.4"D x 56"H

MXBD72-2BHC
61.06"W x 24.4"D x 56"H

MXBD48-2SHC
47.5"W x 24.4"D x 56"H

MXBD60-2SHC
61.06"W x 24.4"D x 56"H

MXBD72-2SHC
61.06"W x 24.4"D x 56"H

Models:

MXBD48-2BHC - Beer tower dispenser; black coated steel exterior

MXBD60-2BHC - Beer tower dispenser; black coated steel exterior

MXBD72-2BHC - Beer tower dispenser; black coated steel exterior

Stainless Steel Models:

MXBD24-2SHC - Beer tower dispenser; stainless steel exterior

MXBD48-2SHC - Beer tower dispenser; stainless steel exterior

MXBD60-2SHC - Beer tower dispenser; stainless steel exterior

All Models Feature:

- Constructed of powder-coated steel exterior (black) and interior (white)
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) or six (6) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system

All Models Feature:

- Constructed of stainless steel exterior and white powder-coated interior
- Stainless steel interior floor plate
- 3" (77mm) diameter stainless steel insulated beer towers
- Locking door(s) with easy to grip recessed door handles
- Supplied with four (4) or six (6) swivel casters (two with brakes)
- Solid state digital control system
- LED temperature display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Urethane foam insulated walls and doors
- Front-breathing refrigeration system



MODEL	EXTERNAL DIMENSIONS	NET CAPACITY	HOLDING TEMPERATURE RANGE	AMP DRAW	SHIPPING WEIGHT	REFRIGERANT AND CHARGE SIZE	DOORS / TOWERS / TAP FAUCETS	ELECTRICAL
MXBD48-2BHC	47.5" x 24.4" x 56" (1205 x 620 x 1422 mm)	10.5 Cu Ft (297 L)	33°F to 41°F (1°C to 5°C)	3.0A	267 lbs (121 kg)	R-290a 3.88 oz (110 g)	2 / 2 / 2	115V / 60Hz / 1Ph
MXBD60-2BHC	61.06" x 24.4" x 56" (1247 x 620 x 1422 mm)	14.2 Cu Ft (402 L)	33°F to 41°F (1°C to 5°C)	3.0A	304 lbs (138 kg)	R-290a 3.88 oz (110 g)	2 / 2 / 2	115V / 60Hz / 1Ph
MXBD72-2BHC	73.07" x 24.4" x 56" (1856 x 620 x 1422 mm)	17.3 Cu Ft (490 L)	33°F to 41°F (1°C to 5°C)	3.0A	351 lbs (159 kg)	R-290a 4.59 oz (130 g)	3 / 2 / 4	115V / 60Hz / 1Ph
MXBD48-2SHC	47.5" x 24.4" x 56" (1205 x 620 x 1422 mm)	10.5 Cu Ft (297 L)	33°F to 41°F (1°C to 5°C)	3.0A	267 lbs (121 kg)	R-290a 3.88 oz (110 g)	2 / 2 / 2	115V / 60Hz / 1Ph
MXBD60-2SHC	61.06" x 24.4" x 56" (1247 x 620 x 1422 mm)	14.2 Cu Ft (402 L)	33°F to 41°F (1°C to 5°C)	3.0A	304 lbs (138 kg)	R-290a 3.88 oz (110 g)	2 / 2 / 2	115V / 60Hz / 1Ph
MXBD72-2SHC	73.07" x 24.4" x 56" (1856 x 620 x 1422 mm)	17.3 Cu Ft (490 L)	33°F to 41°F (1°C to 5°C)	3.0A	351 lbs (159 kg)	R-290a 4.59 oz (130 g)	3 / 2 / 4	115V / 60Hz / 1Ph