

# HIGH VOLUME COFFEE BREWING SYSTEMS

## STATIONARY Series

### CBS-72A (FOR COUNTERTOPS)

Twin 6.0 Gallon Station



Shown with 6.0 Gallon LUXUS® Thermal Dispensers (LBD-6)

FETCO® is the category expert and the ONLY manufacturer of ultra high-volume (7-24 Gallon) portable coffee brewing systems for very large scale operations. Due to the high capacity output and reliable performance the CBS-7000 Series is the preferred choice for specification in hotels, stadiums, convention centers and other large venues.



#### Set it and forget it.

Once your recipe parameters are programmed in, this brewer delivers consistent and repeatable results.



#### Steam Control.

Efficient, steam containing brew compartments virtually eliminate the need for external ventilation, making this system extremely adaptable to any Foodservice environment.



#### Expand Your Service.

Brew directly into a High-Capacity LBD Series Thermal Dispenser (sold separately) and transport for high volume coffee or refill service anywhere throughout your venue.

**FETCO®**  
TRUSTED | RELIABLE | QUALITY

## Water Specification

**Water Inlet**  
3/8" male flare fitting

**Minimum Flow Rate**  
3 gpm [11.4 lpm]

**Water Pressure**  
20-75 psig [138-517 kPa]


## Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] /Hour
<b>US &amp; CANADA</b>								
C72017 <sup>(1)</sup>	2 x (3x5.0) kW	120/208-240	3	4+G	11.5-15.1	Terminal Block	31.9-36.8	24.0-36.0 [90.8-136.6] <sup>(4)</sup>
C72027 <sup>(2)</sup>	2 x (3x5.0) kW	120/208-240	3	4+G	23.0-30.2	Terminal Block	63.8-73.6	36.0-42.0 [136.3-159.0] <sup>(4)</sup>
C72037 <sup>(1)</sup>	2 x (3x10.0) kW	120/208-240	3	4+G	22.8-30.1	Terminal Block	63.2-72.9	54.0-60.0 [204.4-227.1] <sup>(4)</sup>
C72047 <sup>(1)</sup>	2 x (3x10.0) kW	440-480 <sup>(3)</sup>	3	3+G	20.8-30.0	Terminal Block	30.1-36.1	60.0 [227.1] <sup>(4)</sup>
C72057 <sup>(2)</sup>	2 x (3x10.0) kW	440-480 <sup>(3)</sup>	3	3+G	41.7-60.0	Terminal Block	60.1-72.2	60.0 [227.1] <sup>(4)</sup>
<b>INTERNATIONAL</b>								
C72107	2 x (3 x 5.0) kW	220-240/380-415	3	4+G	12.9-15.1	Terminal Block	19.5-21.3	18.2 [69.0] <sup>(1)</sup>
C72117	2 x (3 x 10.0) kW	220-240/380-415	3	4+G	25.5-30.1	Terminal Block	38.6-42.1	24.3-30.4 [92.0-115.0] <sup>(1)</sup>

- (1) With power management.
- (2) Without power management.
- (3) Plus power cord for control, 120 VAC.
- (4) Based on standard factory settings: 7.0 minute brew time; 0% prewet; 200°F water.

## Measurements

<b>Height</b> 48 1/2" [123.1 cm]	<b>Width</b> 36" [91.4 cm]	<b>Depth</b> 37" [94.0 cm]	<b>Empty Weight</b> 420 lbs [190.5 kg]	<b>Filled Weight</b> 720 lbs [326.6 kg]	<b>Shipping Weight</b> 659 lbs [298.9 kg]	<b>Shipping Dimensions:</b> 55" x 48" x 42" [139.7 x 121.9 x 106.7 cm]
-------------------------------------	-------------------------------	-------------------------------	---	--	--	---

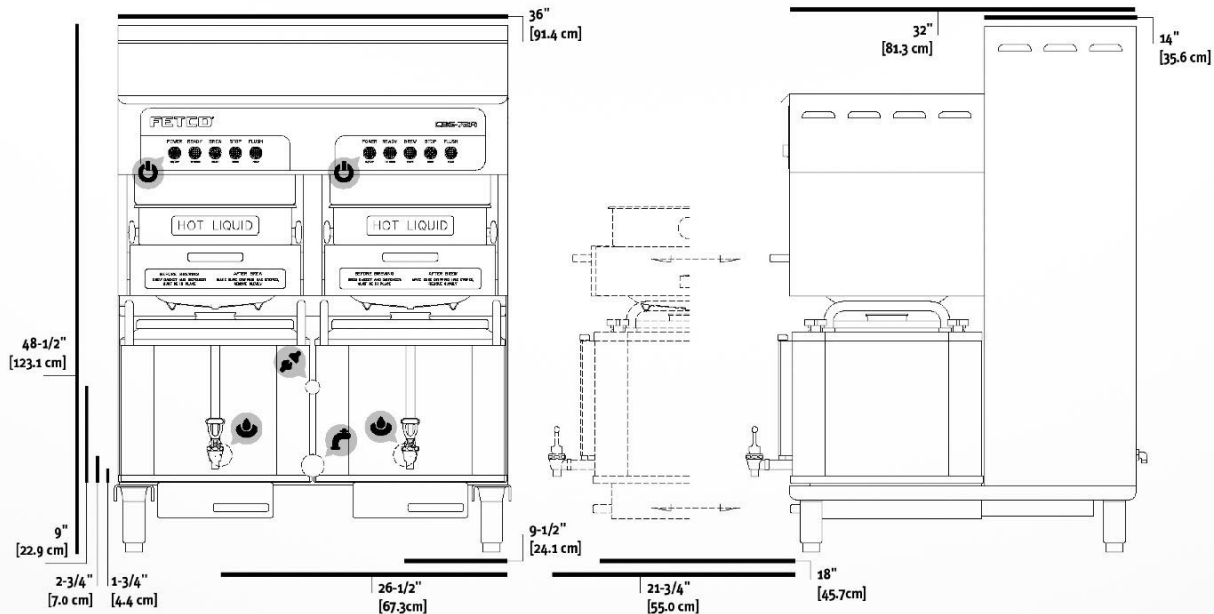

- Electrical Connector
- Tank Drain
- Water Inlet
- On / Off Switch



## Compatible Dispensers

6.0 Gallon LUXUS® Thermal Dispenser (LBD-6)

D019

## Customize Your Brewer

Serving Station for LBD-6 with Drip Tray  
Counter for CBS-72A (CTR-72)  
Identifier Plates, Acrylic

A018  
A020  
A069

## Cups per Hour\*

8oz. **960** 12oz. **640** 16oz. **480** 20oz. **384**

## Paper Coffee Filters

23" x 9" (500/Case)

F006

\* Approximate based on maximum power setting.

## Information

[fetco.com](http://fetco.com)

[info@fetco.com](mailto:info@fetco.com)

847.719.3000  
1.800.338.2699 USA  
 847.719.3001

Food Equipment Technologies Co.  
600 Rose Road  
Lake Zurich, IL 60047  
USA