

ARCHITECTURAL & ENGINEERING SPECIFICATION

Polished chrome-plated cast brass faucet body with integral shanks, quarter turn ceramic disc cartridges and a 4" [102mm] long integral cast spout. Unit is furnished with a standard 2.2 GPM [8.3LPM] pressure compensating aerator, a 4" [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM Coupling nuts for standard lavatory risers.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

PRODUCT FEATURES

- Heavy-duty Quarter Turn Ceramic Disc Cartridge
- Chrome-plated Cast Brass Body with integral Shank
- 4" Vandal Resistant Color Coded metal wrist blade handles

COMPLIANCE AND CERTIFICATION:

- Complies with ASME A112.18.1/CSA B125.1
- Lead-Free Compliant
- ADA Compliant



This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.



AERATOR OPTIONS

	FLOWRATE GPM [LPM]	VANDAL RESISTANT	PRESSURE COMPENSATION	WATER SENSE LABELLED	OUTLET TYPE
-2M	2.2 [8.3]	☑	☑		Aerator
-3M	0.5 [1.9]	☑	☑		Spray
-4M	2.2 [8.3]	☑	☑		Laminar
-7M	1.0 [3.8]		☑	☑	Spray
-16M	1.0 [3.8]	☑	☑		Spray
-17M	1.5 [5.7]	☑	☑	☑	Aerator
-18M	1.5 [5.7]	☑	☑	☑	Laminar
-22M	1.0 [3.8]	☑			Laminar
-25M	0.35 [1.3]	☑	☑		Spray
-27M	0.5 [1.9]				Laminar
-28M	0.5 [1.9]	☑			Laminar


SUFFIX OPTIONS

- G 1-1/4" [32mm] Grid Strainer Drain
- P 1-1/4" [32mm] Pop-up Drain

ARCHITECTURAL & ENGINEERING APPROVAL

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

Rough-in dimensions/Overview dimensions

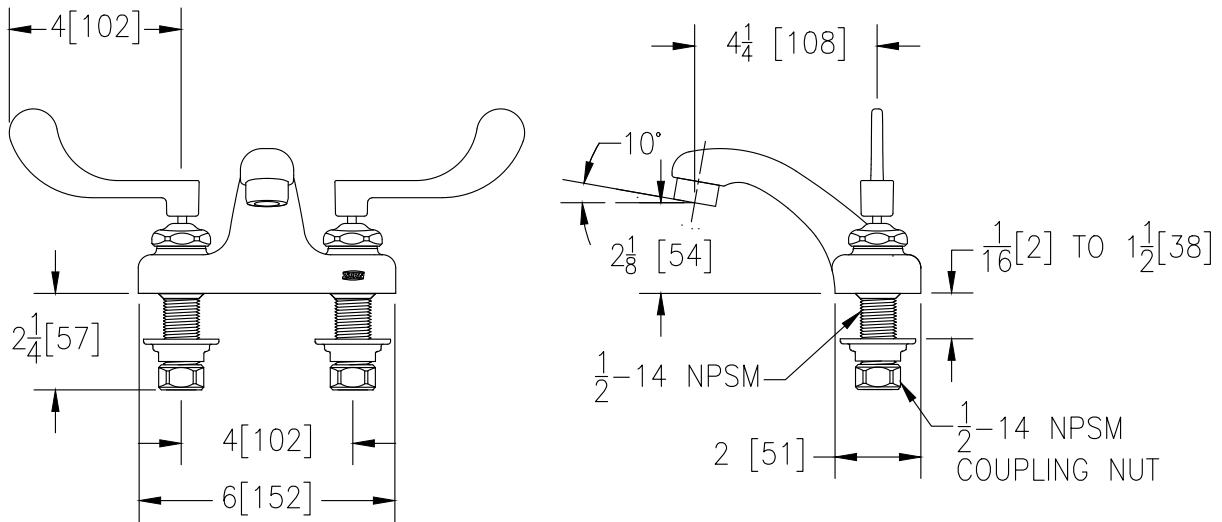

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.