



THE NEW STANDARD IN COMMERCIAL REFRIGERATION

INNOVATION

SUSTAINABILITY

RELIABILITY

TECHNOLOGY



IMBERA FOODSERVICE | 245 Townpark Drive, Suite 145
Kennesaw, GA 30144 | Ph: 678-504-6835 | info@imberafoodservice.com

WWW.IMBERAFOODSERVICE.COM



HIGHEST QUALITY COMPONENTS

High efficiency, low maintenance and longevity

Standard Specifications

Options available by request

MODEL	Electronic Fan Motors	Low Maintenance Condenser		LED Lighting	High Efficiency Glass Doors	Cyclopentane Insulation	Recyclable Plastic Parts	Black Cabinet Exterior	Electronic Temperature Control	Sliding Doors	Gravity Kits	Sandwich Trays	Freezer Baskets	Casters	Standard Lock	Performax Lock	White Cabinet*	SS Look Cabinet*	SS Finish Cabinet*	CO ₂ Refrigeration*	R290 Refrigeration*	NGD LED LUX220*	Back Light*
		Finless	3 Fins/inch																				
VR 1.5	✓	✓		✓	✓	✓	✓	✓	✓								✓	✓		✓			
EVC 04	✓	✓		✓	✓	✓	✓	✓	✓					✓	✓		✓		✓	✓	✓	✓	
VR 04	✓		✓	✓	✓	✓	✓	✓	✓												✓	✓	
VR 06	✓	✓		✓	✓	✓	✓	✓	✓						✓		✓	✓		✓	✓	✓	
VR 08	✓	✓		✓	✓	✓	✓	✓	✓						✓		✓		✓	✓	✓	✓	
VR 10	✓	✓		✓	✓	✓	✓	✓	✓		✓			✓	✓		✓	✓		✓	✓	✓	✓
VR 12	✓	✓		✓	✓	✓	✓	✓	✓		✓			✓	✓		✓	✓		✓	✓	✓	✓
G3 19	✓	✓		✓	✓	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓		✓	✓	✓	✓
G3 26	✓		✓	✓	✓	✓	✓	✓	✓								✓	✓		✓	✓	✓	
VRD 21	✓		✓	✓	✓	✓	✓	✓	✓		✓						✓	✓	✓	✓	✓	✓	
VRD 37	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓		✓			✓	✓		✓	✓	✓	
VRD 43	✓		✓	✓	✓	✓	✓	✓	✓		✓	✓		✓	✓		✓	✓		✓	✓	✓	✓
G3 72	✓		✓	✓	✓	✓	✓	✓	✓		✓						✓	✓		✓	✓	✓	
VFS 24	✓		✓	✓	✓	✓	✓	✓	✓				✓		✓	✓	✓	✓		✓	✓	✓	✓

Available April, 2017.
*Some options require minimum order quantities and/or longer lead times.



Low Maintenance Condenser: Designed to reduce dust & debris accumulation, which significantly reduces service frequency and run time. Delivers lowest ongoing energy consumption and guarantees refrigeration system longevity.



Bright LED Options: LED uses a fraction of the energy of regular florescent lights and requires no replacement for up to seven years. Imbera modular standard design, with multiple 1" LED modules, allows for efficient replacement or upgrade and are backward compatible to 2008.




Electronic Motors: Enhances performance and efficiency. Uses only a fraction of the energy and offers longer life expectancy than industry standard shaded-pole motors.



Electronic Temperature Controller: Patented CIF electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.



Eco-Friendly Refrigerants: In addition to standard R134a refrigerant, R290 and R744 options are offered. Our R290 model range will be DOE 2017 and Energy Star 4.0 compliant, significantly reducing environmental impact."

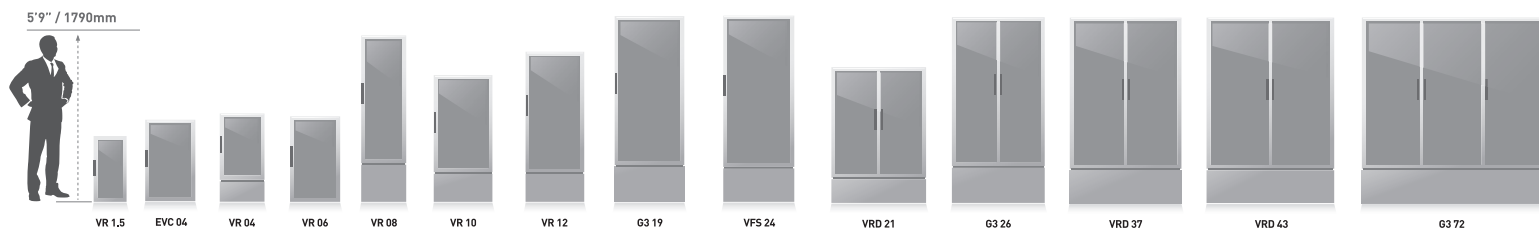



VR 1.5

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 27 7/8"	694 mm
	W: 14"	355 mm
	D: 18 1/4"	463 mm
Internal Dimensions	H: 23 5/8"	599 mm
	W: 11"	280 mm
	D: 12 1/4"	312 mm
Weight	Crated: 63 Lbs 28 Kg	
Shelves	3	
20 oz bottle capacity	Flat:	18
	Gravity:	N/A
Voltage	115/60	AMPS 1.7
Condition	C	
Certifications		



VR 04

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 37 3/8"	950 mm
	W: 19"	482 mm
	D: 24 1/2"	618 mm
Internal Dimensions	H: 24 3/4"	630 mm
	W: 15 7/8"	404 mm
	D: 16 5/8"	422 mm
Weight	Crated: 98 Lbs 45 Kg	
Shelves	3	
20 oz bottle capacity	Flat:	50
	Gravity:	N/A
Voltage	115/60	AMPS 2.1
Condition	C	
Certifications		



VR 06

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 21 1/4"	921 mm
	W: 36 1/4"	540 mm
	D: 27 3/4"	704 mm
Internal Dimensions	H: 24 3/4"	607 mm
	W: 15 7/8"	456 mm
	D: 16 5/8"	554 mm
Weight	Crated: 137 Lbs 62 Kg	
Shelves	3	
20 oz bottle capacity	Flat:	84
	Gravity:	N/A
Voltage	115/60	AMPS 2.5
Condition	C	
Certifications		



EVC 04

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 32 3/4"	830 mm
	W: 21 1/4"	540 mm
	D: 23 7/8"	608 mm
Internal Dimensions	H: 28 5/8"	726 mm
	W: 18"	458 mm
	D: 18 3/4"	476 mm
Weight	Crated: 114.6 Lbs 52.0 Kg	
Shelves	2	
20 oz bottle capacity	Flat:	60
	Gravity:	N/A
Voltage	115/60	AMPS 2.4
Condition	C	
Certifications		



VR 08

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 70 1/2"	1792 mm
	W: 19 1/8"	485 mm
	D: 21"	533 mm
Internal Dimensions	H: 53"	1346 mm
	W: 15 7/8"	404 mm
	D: 16 5/8"	422 mm
Weight	Crated: 174 Lbs 79 Kg	
Shelves	5	
20 oz bottle capacity	Flat:	125
	Gravity:	125
Voltage	115/60	AMPS 3.0
Condition	C	
Certifications		



VR 10

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 53 3/4"	1365 mm
	W: 24 7/8"	632 mm
	D: 23 1/4"	590 mm
Internal Dimensions	H: 39 7/8"	1013 mm
	W: 21 7/8"	555 mm
	D: 18 5/8"	472 mm
Weight	Crated: 185 Lbs 84 Kg	
Shelves	3	
20 oz bottle capacity	Flat:	126
	Gravity:	108
Voltage	115/60	AMPS 3.0
Condition	C	
Certifications		

CABINET COLOR CHOICES:

BLACK STD



WHITE ON WHITE



BLACK ON BLACK



Stainless Steel Finish



DOOR OPTIONS:



Next Generation Door




Stainless Steel Frame

GRAPHIC CHOICES:



INTERNAL MERCHANDISING OPTIONS:



Gravity Kit



Sandwich Trays



Freezer Basket



Shelf Pricing Tag Kit

OTHER OPTIONS:



Casters



Bright LED's
• Brighter 220 LUX
• Back cabinet lighting

*Wide range of graphics and customization options available.



VR 12

① TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 63 5/8"	1616 mm
	W: 24 7/8"	632 mm
	D: 23 1/4"	590 mm

Internal Dimensions	H: 49 7/8"	1266 mm
	W: 21 7/8"	555 mm
	D: 18 5/8"	472 mm

Weight	Crated: 188 Lbs	85 Kg
--------	-----------------	-------

Shelves	4
---------	---

20 oz bottle capacity	Flat:	168
	Gravity:	144

Voltage	115/60	AMPS 4.0
---------	--------	----------

Condition	C
-----------	---

Certifications	UL	NSF	ETL
----------------	----	-----	-----



G3 19

① TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 5/8"	2000 mm
	W: 29 1/2"	750 mm
	D: 27 1/2"	700 mm

Internal Dimensions	H: 60 1/2"	1536 mm
	W: 25 1/2"	649 mm
	D: 21 3/8"	542 mm

Weight	Crated: 240.4 Lbs	109.1 Kg
--------	-------------------	----------

Shelves	5
---------	---

20 oz bottle capacity	Flat:	240
	Gravity:	240

Voltage	115/60	AMPS 5.2
---------	--------	----------

Condition	C
-----------	---

Certifications	UL	NSF	ETL	ENERGY
----------------	----	-----	-----	--------

Now Available in: Stainless **Steel** Look



G3 26

① TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 3/4"	2000 mm
	W: 39 1/2"	1000 mm
	D: 27 1/2"	700 mm

Internal Dimensions	H: 60 3/8"	1535 mm
	W: 35 3/8"	898 mm
	D: 21 5/8"	548 mm

Weight	Crated: 331 Lbs	150 Kg
--------	-----------------	--------

Shelves	10
---------	----

20 oz bottle capacity	Flat:	300
	Gravity:	N/A

Voltage	115/60	AMPS 7.6
---------	--------	----------

Condition	C
-----------	---

Certifications	UL	NSF	ETL
----------------	----	-----	-----



VRD 21

① TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 57 1/2"	1462 mm
	W: 40 1/8"	1020 mm
	D: 24 1/2"	622 mm

Internal Dimensions	H: 43 5/8"	1108 mm
	W: 36 1/4"	919 mm
	D: 16 3/4"	423 mm

Weight	Crated: 254 Lbs	115 Kg
--------	-----------------	--------

Shelves	4
---------	---

20 oz bottle capacity	Flat:	180
	Gravity:	165

Voltage	115/60	AMPS 3.8
---------	--------	----------

Condition	C
-----------	---

Certifications	UL	NSF	ETL
----------------	----	-----	-----



Performax 30
by Imbera

HEALTH LOCK IDEAL FOR UNATTENDED LOCATIONS

Enhanced features and logic are designed to reduce unnecessary locking events and lost sales opportunities: (1) Monitors temperature changes, door openings, extends the lock timer up to 45 minutes, ensuring merchandise safety, (2) Locks within 2 minutes of AC loss to unlock only if power is restored and if the product temperature remains within safety parameters.



XTREME

SUPER COLD LINE IDEAL FOR ICE COLD REFRESHMENTS

Reduces beer and alcoholic beverage temperatures below freezing for an optimally refreshing experience:
(1) Average temperature of 24.8F where drinks are extremely cold without being frozen, (2) 2 inch high LED display for maximum consumer appeal and impact.



VFS 24 Freezer



TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 3/4"	2000 mm
	W: 30 1/8"	765 mm
	D: 30 7/8"	785 mm
Internal Dimensions	H: 60 3/4"	1544 mm
	W: 26 1/2"	672 mm
	D: 25 3/8"	646 mm
Weight	Crated: 378 Lbs 179 Kg	
Shelves	5	
Voltage	115/60	AMPS 8.1
Condition	C	
Certifications		



VRD 43



TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 5/8"	1997 mm
	W: 54 1/8"	1375 mm
	D: 29 3/4"	756 mm
Internal Dimensions	H: 59 5/8"	1515 mm
	W: 50"	1270 mm
	D: 24 7/8"	633 mm
Weight	Crated: 501.8 Lbs 227.6 Kg	
Shelves	10	
20 oz bottle capacity	Flat:	420
	Gravity:	560
12 oz can capacity	Total:	1134
	Gravity:	560
Voltage	115/60	AMPS 10.7
Condition	C	

Certifications

Now Available in: Stainless Steel Look



VRD 37

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 5/8"	1997 mm
	W: 47 3/8"	1203 mm
	D: 30 3/8"	770 mm
Internal Dimensions	H: 60 1/2"	1537 mm
	W: 43 1/4"	1095 mm
	D: 25 3/4"	652 mm
Weight	Crated: 450 Lbs 204 Kg	
Shelves	10	
20 oz bottle capacity	Flat:	490
	Gravity:	420
12 oz can capacity	Total:	882
Voltage	115/60	AMPS 10.0
Condition	C	
Certifications		



G3 72

TECHNICAL SPECIFICATIONS

Exterior Dimensions	H: 78 3/4"	2000 mm
	W: 78 3/4"	2000 mm
	D: 33 1/4"	845 mm
Internal Dimensions	H: 60"	1525 mm
	W: 74 5/8"	1897 mm
	D: 27 3/8"	694 mm
Weight	Crated: 746 Lbs 339 Kg	
Shelves	12	
20 oz bottle capacity	Flat:	840
	Gravity:	840
Voltage	115/60	AMPS 13.4
Condition	C	

Certifications





FEMSA is one of the global leaders in the **Fast Moving Consumer Goods (FMCG)** category with operations in more than 70 countries.



IMBERA IN FIGURES

3 **PRODUCTION FACILITIES** ACROSS THE AMERICAS

EXPORTS TO **53** DIFFERENT COUNTRIES ALLIANCES IN THREE CONTINENTS

+75 YEARS OF INDUSTRY LEADERSHIP AND INNOVATION

WE SERVICE **1,500,000** COOLING UNITS EACH YEAR

PRODUCING **415,000** UNITS ANNUALLY

WORLD'S **#1** COMMERCIAL REFRIGERATION MANUFACTURER

GROWING WORKFORCE OF **+4,000** EMPLOYEES

+150 NEW PRODUCTS COMING OUT EACH YEAR

INDUSTRY LEADING TOTAL COST OF OWNERSHIP & PREMIUM QUALITY STANDARD SPECS

IMBERA is the world's #1 commercial refrigeration manufacturer and the industry leader in customized design solutions. Since 2002, we have focused on enhancing the efficiency of our coolers in order to gradually reduce their TCO. Since then, we have lowered the energy consumption of our coolers by almost 80%*.

IMBERA CORE COMPETENCIES

VALUE: Imbera products meet and exceed the quality and specification of our key competitors.



RELIABILITY: Imbera has proven to be the most reliable equipment in the North American market today, with 3 year Parts & Labor warranty and 5 years on compressor.

QUALITY: Highest specification components and materials that deliver industry leading reliability and highest efficiency, while optimizing consumer appeal.

SERVICE: Imbera Services has the largest full service organization of any manufacturer in the Americas today with over 2,500 field service technicians.

ENERGY EFFICIENCY & ENVIROMENTALLY FRIENDLY: Imbera products offer the highest energy efficiency equipment globally, such as low maintenance condensers as well as next generation HC and CO₂ refrigerant solutions.

CUSTOMER SERVICE & WARRANTY

- Imbera's standard warranty: 3 year parts and labor warranty. 5 year compressor warranty.
- Comprehensive parts distributions throughout the US and Canada.

CUSTOMER SERVICE CONTACT: 866-548-5770



* Calculated according to TCCC test protocol.