Tracker Timer Model 44

16-DISPLAY TIMER

Specifications

Mechanical


- 20 ga. (.036”) stainless steel enclosure
- Polyester face with back-printed text
- Faceplate: polyester with back-printed text and removable menu strip
- Maximum ambient temperature: 158°F / 70°C, 90% max. RH non-condensing

Electrical

- Power Input: 90-240VAC, 50/60 Hz
- Current less than 0.5 amp
- 16 Four-Digit Displays: .625”H, 14-segment green LED
- Action Alarms: 1 per stage
- Indicators: green LED
- Power Cord: Removable 90-degree angle, 6-ft. oil-resistant neoprene, grounded
- Audio Output: 78 db @ 6 feet
- Solid-state integrated circuit design
- Switch life rating: 10 million cycles
- Status indicators rated life: 50,000 hours
- Noise spike protection: 4000 Volt Minimum (on timers and all properly installed controls)

Shipping Weight

- Approx. 12 lbs. (5.44 Kg)

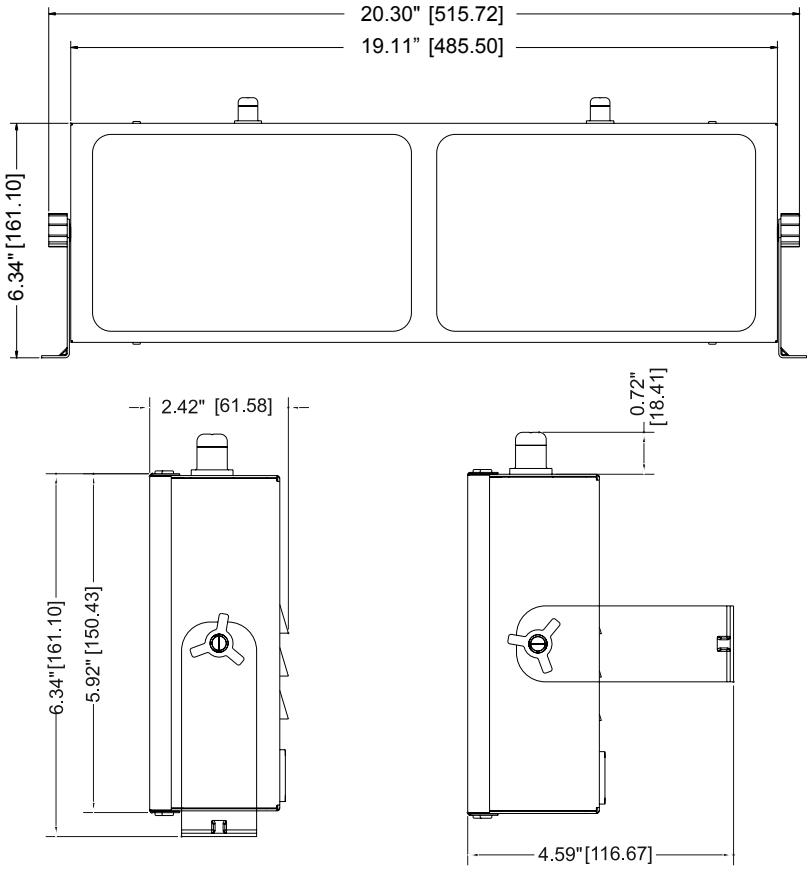

Order Info

Part Number	Description
TRACK4X4	Tracker Model 44 standard
TRACK4X4CP	Tracker Model 44 with communication port
TRACK4X4CPM	‘Master’ Tracker Model 44 with comm. port for peer-to-peer function
TRACK4X4CPS	‘Satellite’ Tracker Model 44 with comm. port for peer-to-peer function

NOTE: *When ordering, indicate voltage and type of line cord required.*

KitchenBrains®
Commercial Kitchen Intelligence

CONNECTICUT | FLORIDA | LONDON | SHANGHAI | SINGAPORE
www.KitchenBrains.com | 800.243.9271 | 203-377-4414
905 Honeyspot Road, Stratford, CT 06615 USA

SCK Link® is a registered trademark of Technology Licensing Corporation and use is subject to appropriate license agreement

©2025 Kitchen Brains. All rights reserved. XXXX 01/25 Rev A