# G3 Alpha® Decanter Coffee Brewers




**ALP3GT12A000**
Decanter Coffee Brewer
3 Station with 1 Lower
and 2 Upper Warmers

## Features

Encapsulated Generation Three (G3) Digital Control Module
Intutive, Scroll-Through Precision Programming
Easily Adjust Time, Volume, Temperature and More
Built-In Fine Tuning of Brewing Modes
Built-In Self Diagnostic System
Integral Quality Timer and Automatic Warmer Shut-Off
Cold Water Brew Lock-Out


Curtis®
*Perfecting the art of brewing since 1941*

# G3 Alpha® Decanter Coffee Brewers


**ALP1GT12A000**
G3 Alpha
1 Station Coffee Brewer

**ALP2GT12A000**
G3 Alpha
2 Station Coffee Brewer


**ALP3GT12A000**
G3 Alpha
3 Station Coffee Brewer

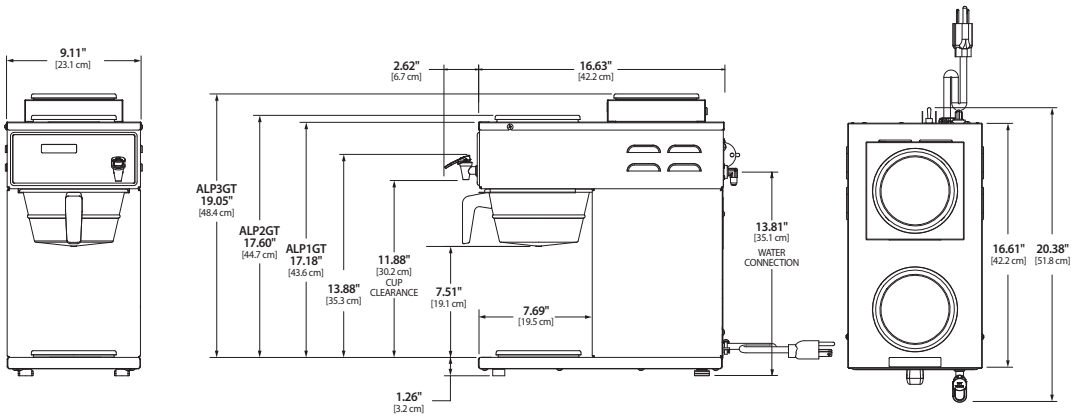



**ALP3GTL12A000**
G3 Alpha
3 Station Coffee Brewer

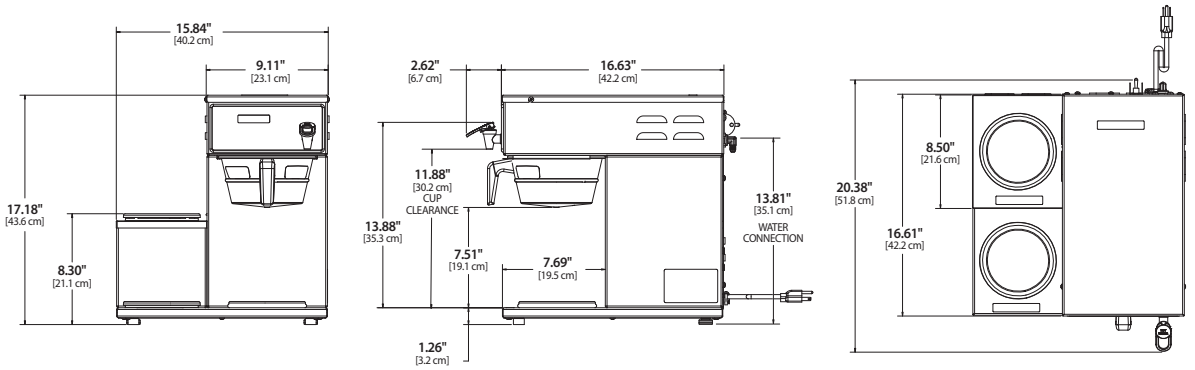



**ALP3GTR12A000**
G3 Alpha
2 Station Coffee Brewer

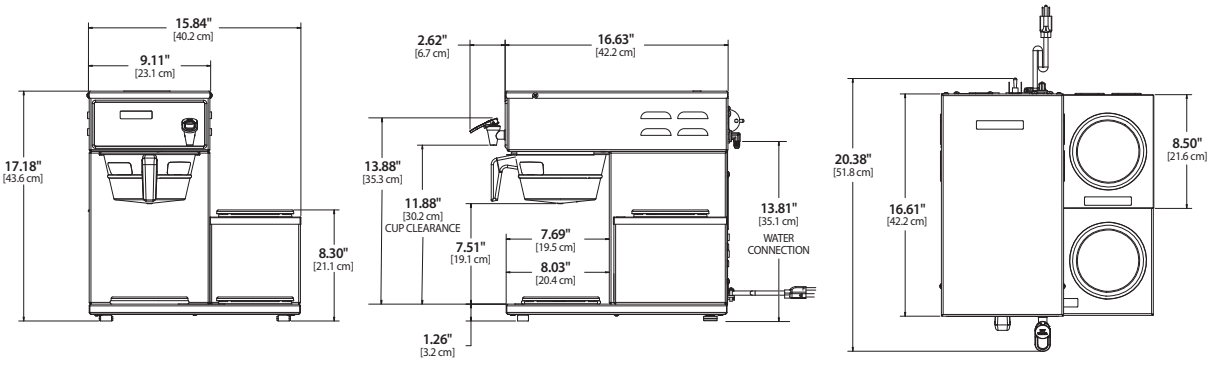


**ALP5GT12A000**
G3 Alpha
5 Station Coffee Brewer

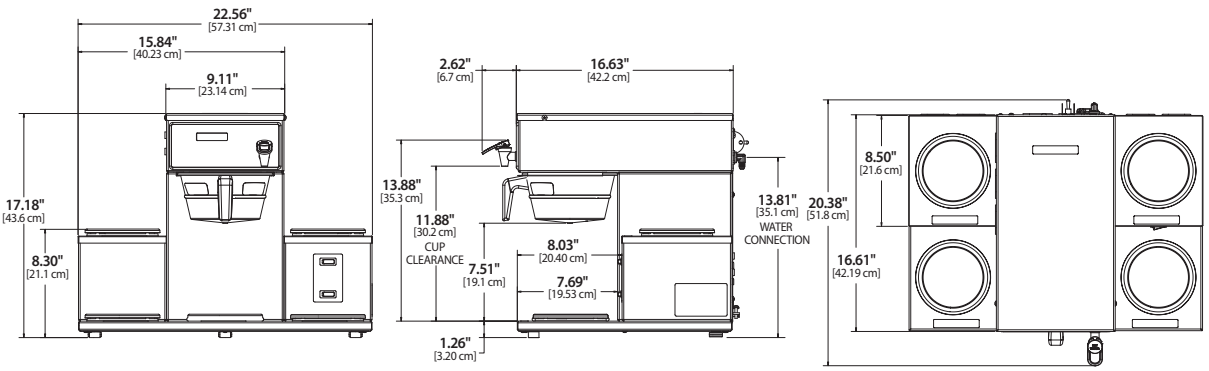


**ALP6GT63A000**
G3 Alpha
6 Station Coffee Brewer

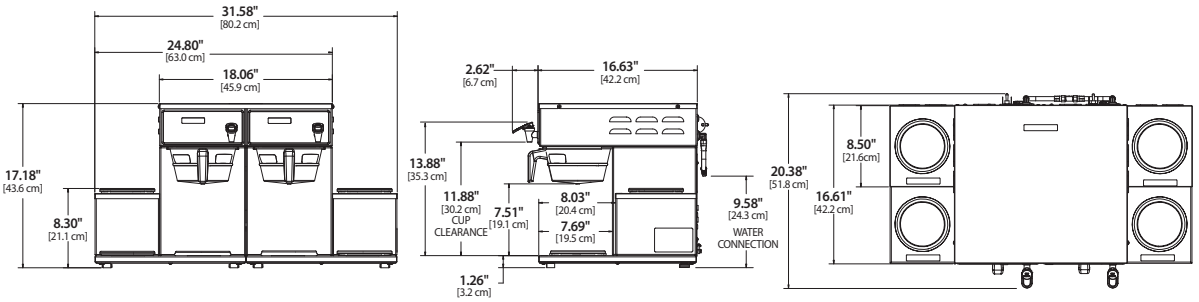


**ALP6GTN63A000**
G3 Alpha
6 Station Coffee Brewer

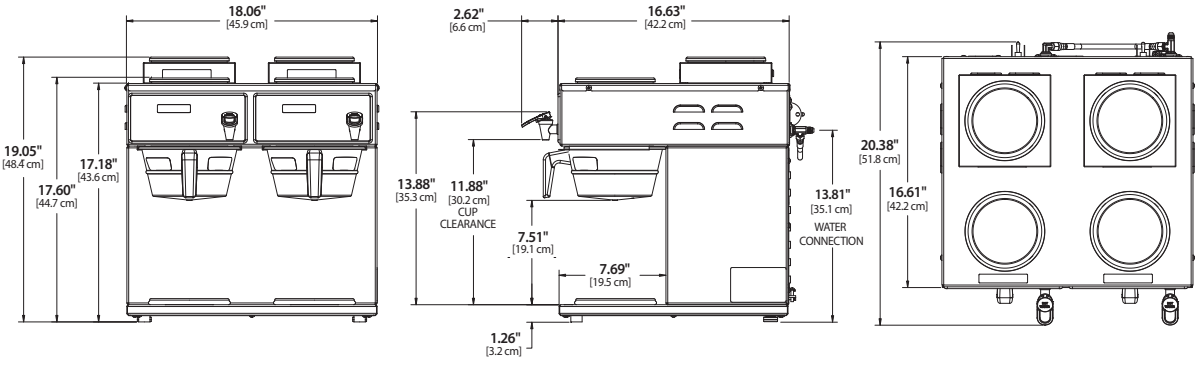

# G3 Alpha® Decanter Coffee Brewers

## Specifications

| MODEL # | DESCRIPTION | HEIGHT x WIDTH x DEPTH | BREWER FILL WEIGHT | BREWED GAL/HR |
|---|---|---|---|---|
| ALP1GT12A000 | G3 Alpha® Decanter 1 Station, 1 Lower Warmer | 17.18" x 9.11" x 20.38" | 37.3 lbs. | 4.0 |
| ALP2GT12A000 | G3 Alpha® Decanter 2 Station, 1 lower, 1 Upper Warmer | 17.60" x 9.11" x 20.38" | 38.3 lbs. | 4.0 |
| ALP3GT12A000 | G3 Alpha® Decanter 3 Station, 1 lower, 2 Upper Warmers | 19.05" x 9.11" x 20.38" | 39.3 lbs. | 4.0 |
| ALP3GT63A000 | G3 Alpha® Decanter 3 Station, 1 lower, 2 Upper Warmers | 19.05" x 9.11" x 20.38" | 39.3 lbs. | 4.0/9.0 |
| ALP3GTR12A000 | G3 Alpha® Decanter 3 Station, 3 lower, Right Warmers | 17.18" x 15.84" x 20.38" | 45.3 lbs. | 4.0 |
| ALP3GTR63A000 | G3 Alpha® Decanter 3 Station, 3 lower, Right Warmers | 17.18" x 15.84" x 20.38" | 46.3 lbs. | 4.0/9.0 |
| ALP3GTL12A000 | G3 Alpha® Decanter 3 Station, 3 lower, Left Warmers | 17.18" x 15.84" x 20.38" | 45.3 lbs. | 4.0 |
| ALP3GTL63A000 | G3 Alpha® Decanter 3 Station, 3 lower, Left Warmers | 17.18" x 15.84" x 20.38" | 46.3 lbs. | 4.0/9.0 |
| ALP5GT12A000 | G3 Alpha® Decanter 5 Station, 5 lower, Right/Left Warmers | 17.18" x 22.56" x 20.38" | 52.3 lbs. | 4.0 |
| ALP5GT63A000 | G3 Alpha® Decanter 5 Station, 5 lower, Right/Left Warmers | 17.18" x 22.56" x 20.38" | 53.3 lbs. | 4.0/9.0 |
| ALP6GT63A000 | G3 Alpha® Decanter 6 Station Twin, 6 Lower Warmers | 17.18" x 31.58" x 20.38" | 85.3 lbs. | 4.0/9.0 |
| ALP6GTN63A000 | G3 Alpha® Decanter 6 Station Twin, 4 Upper, 2 Lower Warmers | 19.05" x 18.06" x 20.38" | 73.3 lbs. | 4.0/9.0 |

## Utility Requirements

| | ELECTRICAL | | | | | | | | WATER | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| MODEL # | PHASE | VOLTS | AMPS | MIN. CIRCUIT | HEAT CONFIG | WIRE | WATTS | HERTZ | CONNECTOR | PRESSURE | MIN. FLOW RATE | TANK VOL. |
| ALP1GT12A000 | 1 PH | 120V | 13.3A | 15A | 1 x 1450W | 2W+G | 1600W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP2GT12A000 | 1 PH | 120V | 14.2A | 15A | 1 x 1450W | 2W+G | 1700W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GT12A000 | 1 PH | 120V | 15.0A | 15A | 1 x 1450W | 2W+G | 1800W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GT63A000 | 1 PH | 120/220V | 15.0/15.0A | 15/20A | 2 x 1450W | 2W/3W+G | 1800/3300W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GTR12A000 | 1 PH | 120V | 15.0A | 15A | 1 x 1450W | 2W+G | 1800W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GTR63A000 | 1 PH | 120/220V | 15.0/15.0A | 15/20A | 2 x 1450W | 2W/3W+G | 1800/3300W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GTL12A000 | 1 PH | 120V | 15.0A | 15A | 1 x 1450W | 2W+G | 1800W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP3GTL63A000 | 1 PH | 120/220V | 15.0/15.0A | 15/20A | 2 x 1450W | 2W/3W+G | 1800/3300W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP5GT12A000 | 1 PH | 120V | 16.3A | 15A | 1 x 1450W | 2W+G | 1950W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP5GT63A000 | 1 PH | 120/220V | 16.3/15.9A | 20/20A | 2 x 1450W | 2W/3W+G | 1950/3500W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP6GT63A000 | 1 PH | 120/220V | 30.0/30.0A | 40/40A | 2 x 1450W | 2W/3W+G | 3600/6600W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |
| ALP6GTN63A000 | 1 PH | 120/220V | 30.0/30.0A | 40/40A | 2 x 1450W | 2W/3W+G | 3600/6600W | 50/60 Hz | 1/4" Flare | 20 - 90 psi | 1.0 GPM | 1.6 gal. |

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

**WARNING** - These products can expose you to chemicals including Acrylamide and Bisphenol A (BPA), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information visit www.P65Warnings.ca.gov

Wilbur Curtis Co., Inc. / 6913 Acco Street / Montebello CA 90640
800.421.6150 / 323.837.2300 / www.wilburcurtis.com
***Perfecting the art of brewing since 1941***

AUG/2018 – F-3195 revG