

# MOTAK

## Commercial Gas Range 10 Burners - 2 Ovens

Model #: **MR10**

This commercial gas range has powerful Planck 30,000 BTU cast iron burners. Each burner has a lift off head - individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, 24.75" high backriser and shelf, (6) casters, and a ¾" NPT gas connection.



The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 200°F - 500°F and is equipped with a flame failure safety device.

**Not suitable for installation in non-commercial or residential applications.**

## Product Details

### Cast Iron Burners

- Lift-off heads
- Individual pilot lights
- Heavy-duty 12" x 12" removable cast iron grates
- Flame adjustable control knobs

### Full-size Oven

- 30,000 BTU oven burner
- Cool-to-touch oven door handle
- 2 adjustable oven racks
- Compression spring door system
- Flame failure safety device
- Adjustable thermostat (200°F - 500°F)
- Holds full-size sheet pans

### Construction

- Heavy-duty steel frame
- Stainless Steel front
- 24.75" high backriser and shelf
- Removable crumb tray under the top burners
- Includes 6 heavy-duty casters
- ¾" NPT gas connection
- Gas Type: Natural Gas  
(LP conversion Kit Included)

## Certifications



## Warranty

1 year parts  
& labor


# Commercial Gas Range

## 10 Burners - 2 Ovens


### Plan View

- A pressure regulator is provided with this unit.
  - Natural Gas 4.0" W.C.
  - Propane Gas 10.0" W.C.
- Rear Gas Connection ¾" NPT

Front View

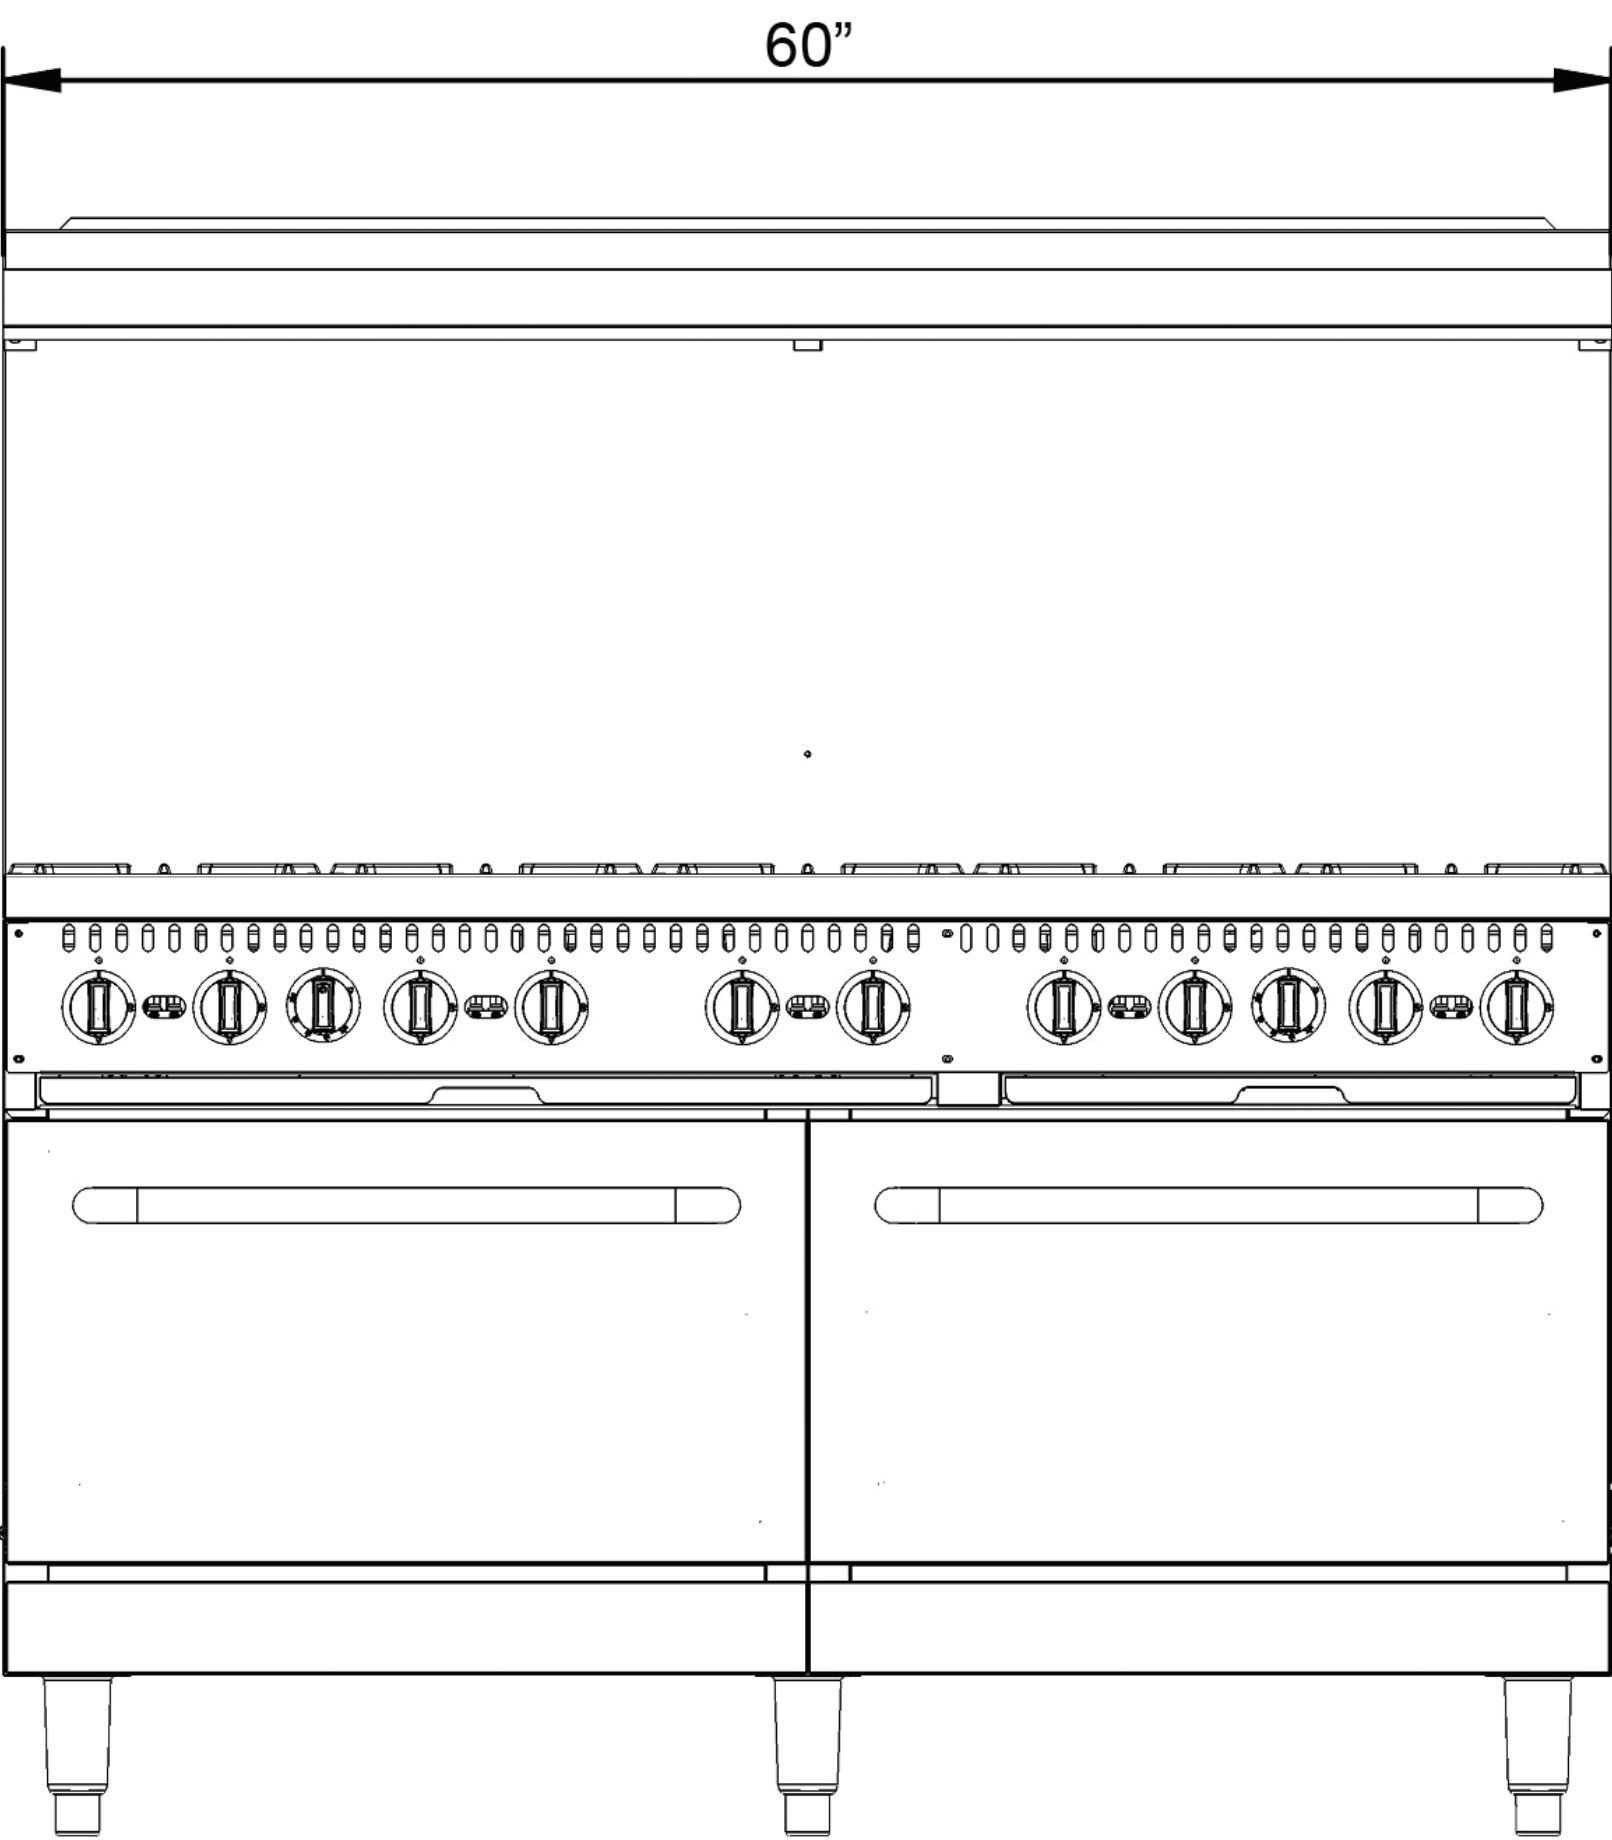

Top View

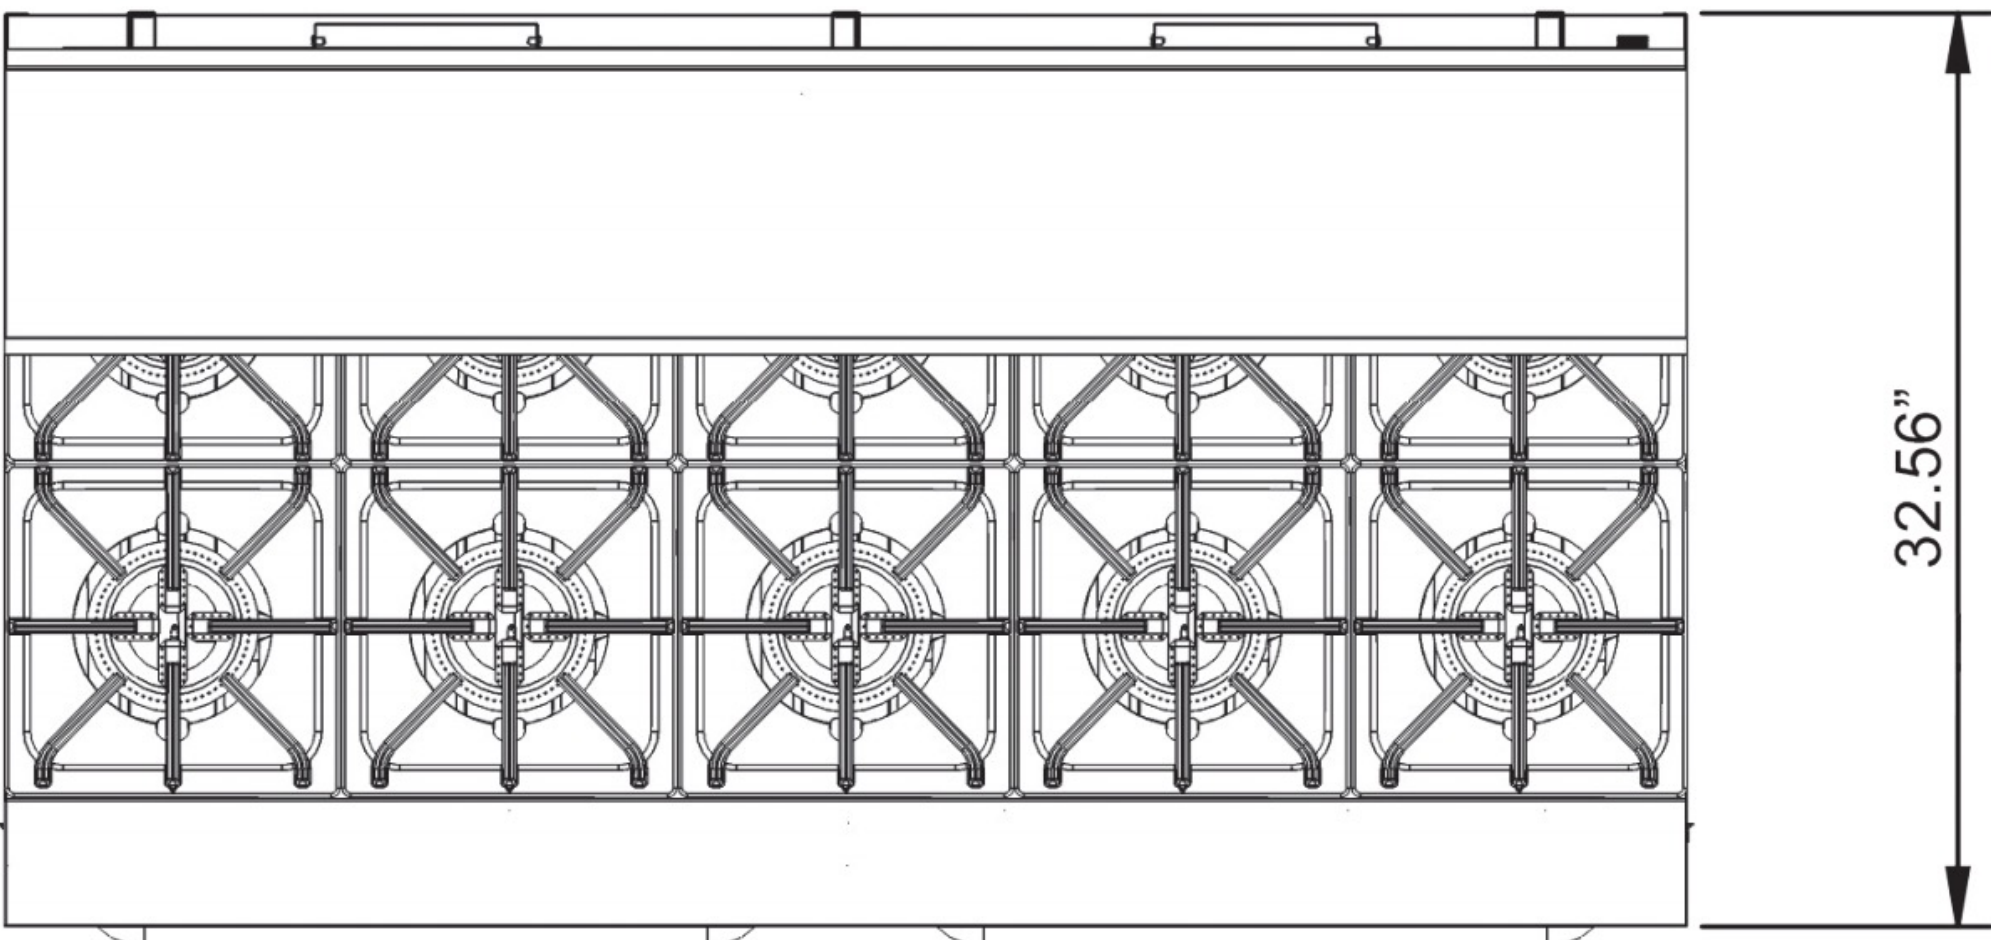

Shown with 6" legs. This model comes standard with (6) casters.

### Specifications

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	Total BTU	Crated Weight (lbs)
		Width	Depth	Height	Width	Depth	Height				
MR10	10	60"	32.56"	60.5"	26.8"	25.8"	13.7"	30,000	30,000	360,000	737 lbs.

\*Not suitable for installation in non-commercial or residential applications.