

# MOTAK

## Commercial Gas Range Oven w/ Griddle

Model #: **MR10RGB24-N-C-S-3**

This commercial gas range offers the cooking flexibility of burners and a raised griddle, with a standard oven below. Each of the six burners has an individual pilot, heavy-duty 11.9-inch-square cast iron grates, and individual instant-light control knobs that control their 30,000 BTU of heating power.

Three cast iron burners with 36,000 BTU of heating capacity heat the griddle and overfire the broiler. The 24-inch griddle has a ¾-inch-thick plate, a 4-inch-wide grease trough, and a valve control every 8 inches, while the broiler has a single rack that can be adjusted to two positions.

The standard oven has a 30,000-BTU burner, a porcelain liner, a durable compression spring door hinge, and two easy-to-remove oven racks. The oven's thermostatic control adjusts from 250 to 550°F and is equipped with a flame-failure safety device.

**Not suitable for installation in non-commercial or residential applications.**

## Product Details

### Six-burner Range

- 30,000 BTU/hour cast iron burners
- 12" x 12" cast iron top grates are removable for easy cleaning
- Each burner has an individual standing pilot light
- Push-in knob with efficient hi-low burner system
- Removable crumb tray

### Oven

- 30,000 BTU/hr total output
- Flame failure safety device
- Adjustable thermostat from 250–550°F
- Door liner is coated in nano-porcelain
- Cool-to-touch stainless steel door handle
- Includes 2 removable and adjustable oven racks



## Certifications



## Warranty

1 year parts & labor

### Raised Griddle

- 24", 36,000 BTU/hr. raised griddle
- 4" wide grease trough
- ¾" thick griddle plate
- 3 cast iron burners with standing pilots
- Valve control every 8"
- Pull out crumb tray with welded corner
- 1 rack for broiling, 2 rack positions


### Construction

- Stainless steel front, riser, and shelf
- 3/4" rear NPT gas connection
- (6) 4" swivel casters (3 locking)


## Commercial Gas Range Oven w/ Griddle

### Plan View

- A pressure regulator is provided with this unit.
  - Natural Gas 4.0" W.C.
  - Propane Gas 10.0" W.C.
- Rear Gas Connection ¾" NPT
  - If using Flex-Hose, the ID should not be smaller than ¾" and must comply with ANSI Z 21.69

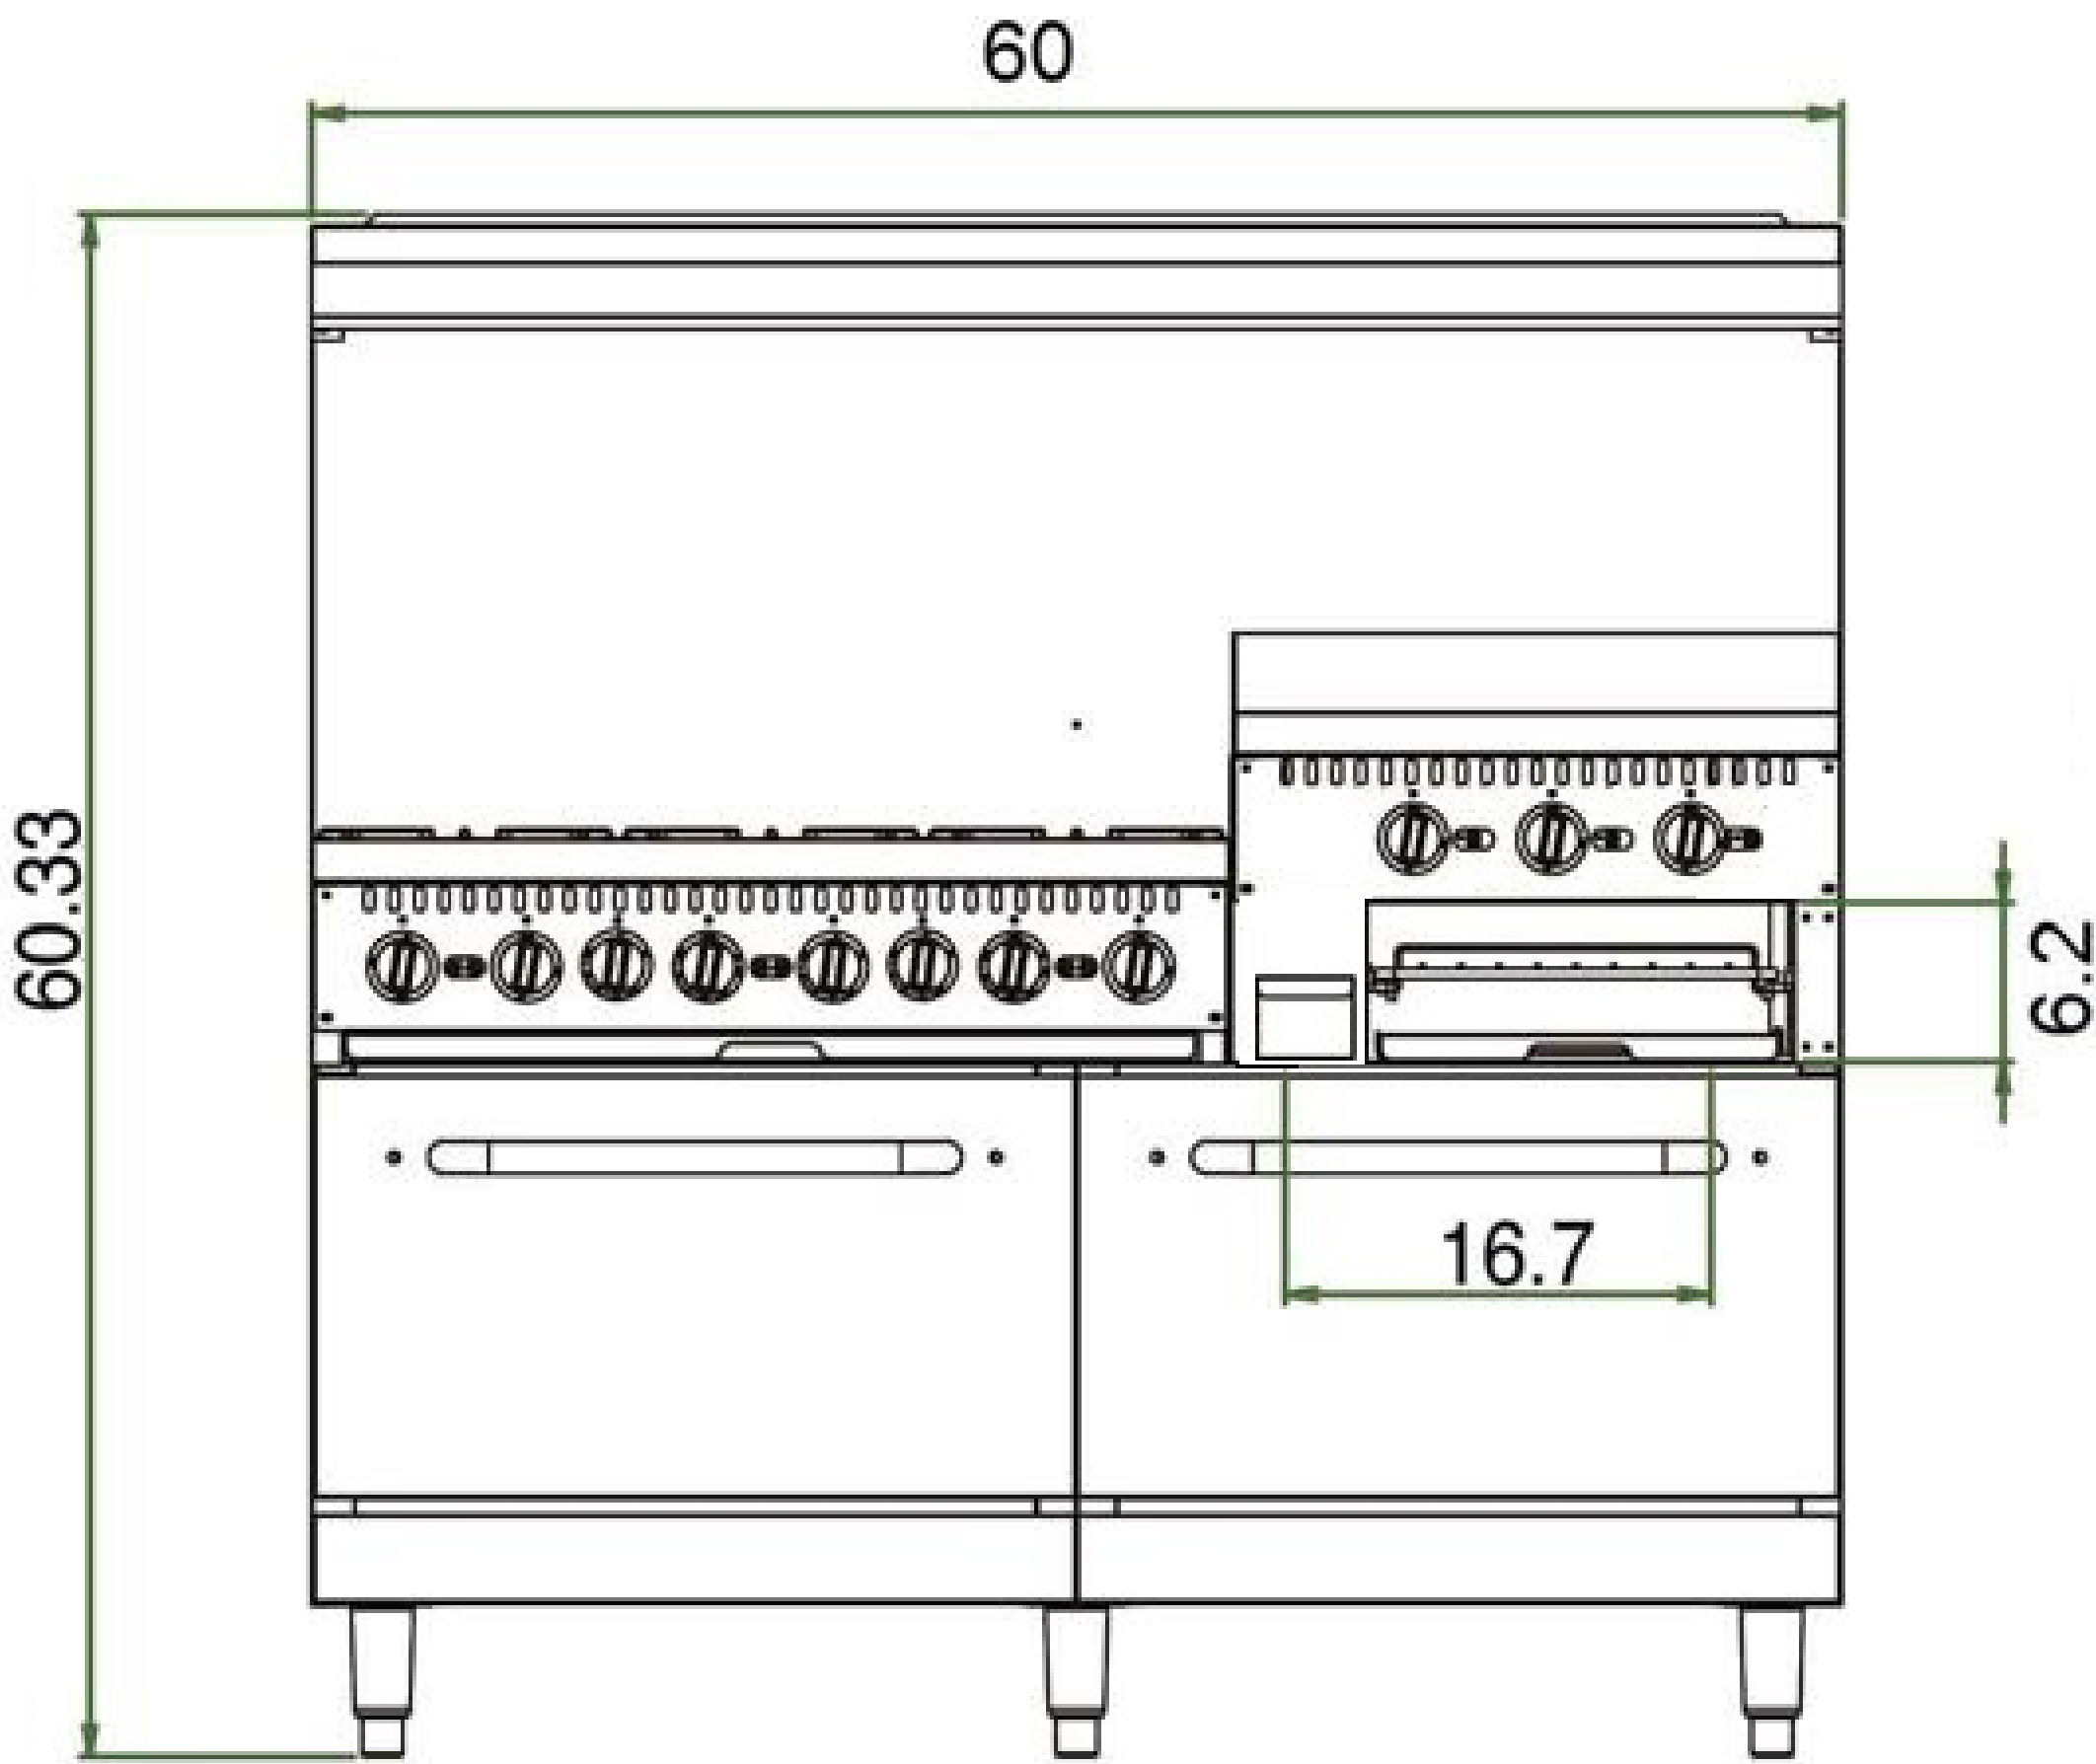

Front View

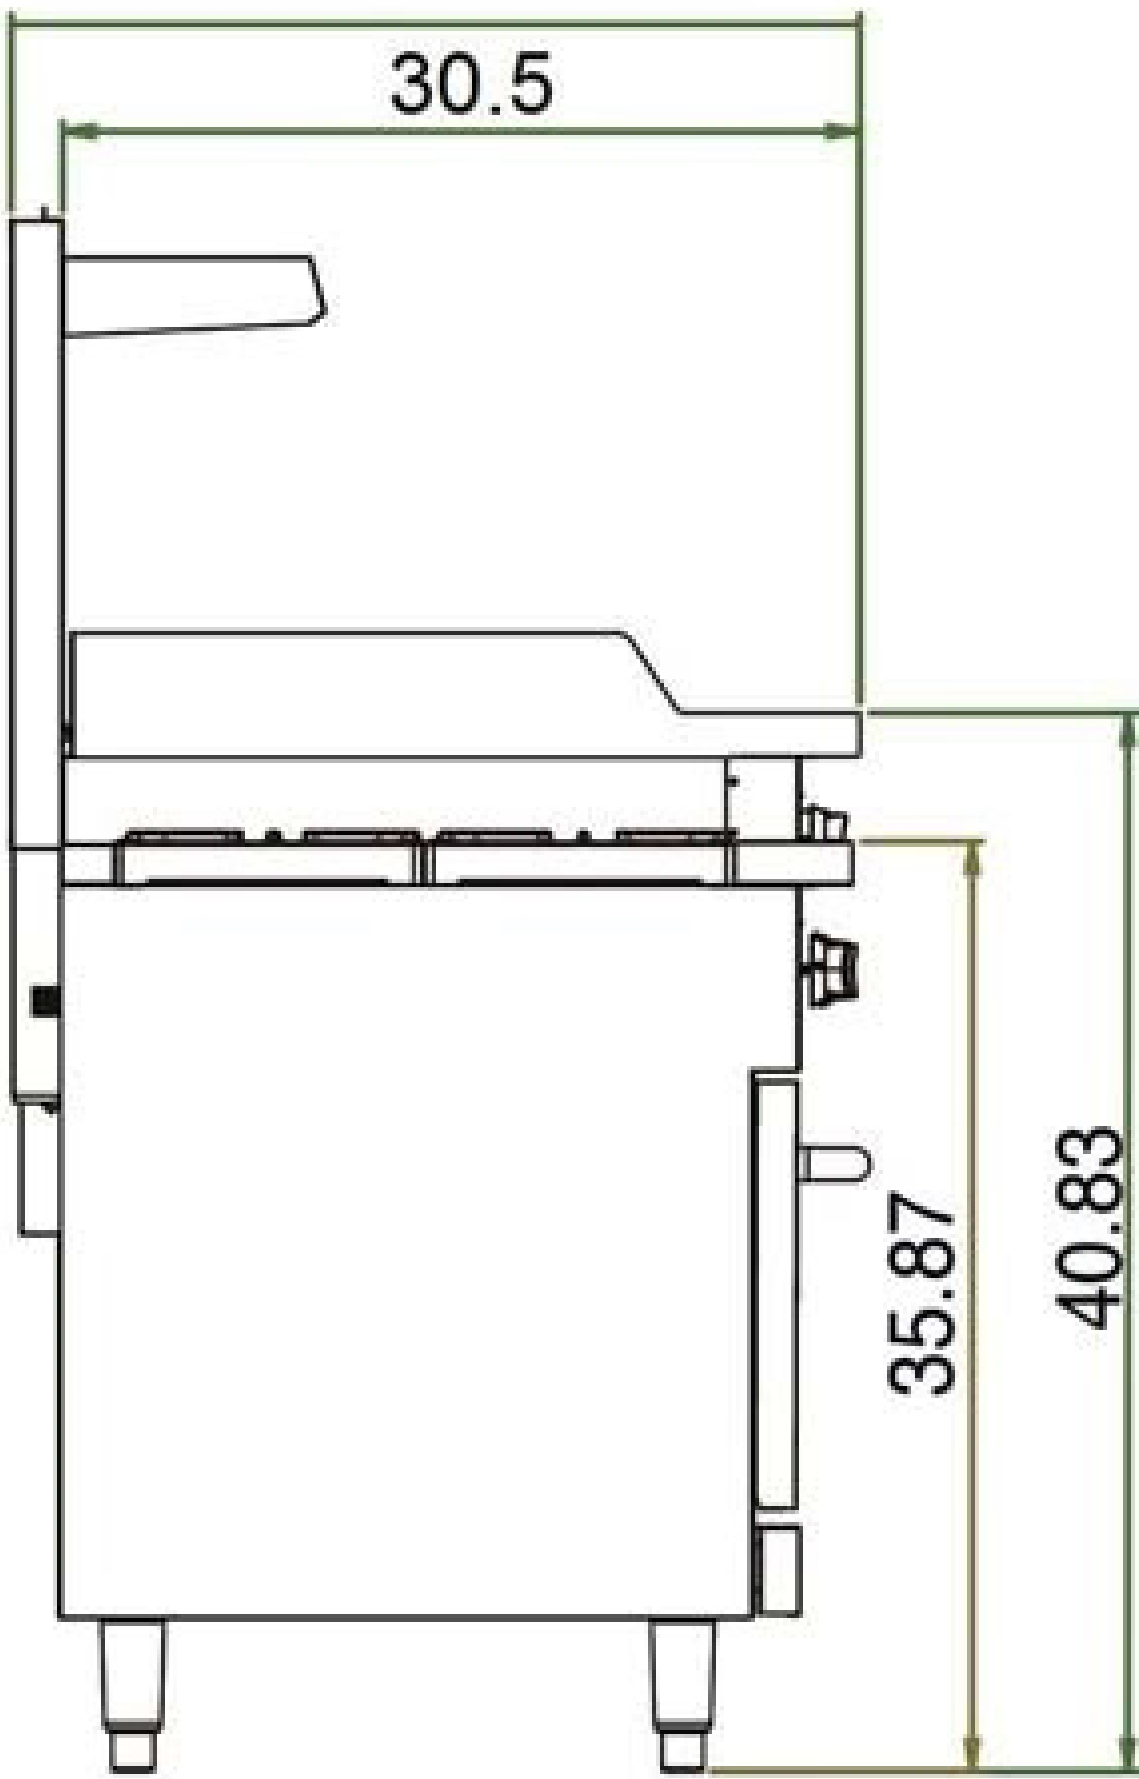

Side View

*\*Pictured with legs. This model comes standard with caster.*

### Specifications: MR10RGB24-N-C-S-3

Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	BTU (Griddle)	Total BTU	Crated Weight (lbs)
	Width	Depth	Height	Width	Depth	Height					
6	59.95"	30.49"	60.33"	26.88"	25.8"	13.8"	30,000	30,000	12,000 (x 3)	276,000	860 lbs.

Not suitable for installation in non-commercial or residential applications.