

MOTAK

Commercial Gas Range 4 Burners - 1 Oven

Model #: **MR4-C-S-3**

This commercial gas range has powerful Planck 30,000-BTU cast iron burners. Each burner has a lift-off head, an individual pilot light, a heavy-duty 12-inch by 12-inch removable cast iron grate, and an instant-light control knob. It has a stainless steel front, 24.75-inch flue riser and shelf, 4 casters (2 locking) and a ¾" NPT gas connection.

The standard oven has a 30,000-BTU burner, two easy-to-remove oven racks, a porcelain liner for easy cleaning, and a compression spring door hinge system for durability. The oven thermostat adjusts from 200-500°F and is equipped with a flame-failure safety device.

Not suitable for installation in non-commercial or residential applications.



Product Details

Standard Features

- 30,000 BTU Planck cast iron burners
 - Lift-off heads
 - Instant-light control knobs
 - Heavy-duty 12" x 12" removable cast iron grates
- Includes 4" swivel casters (2 locking)


Construction

- Heavy-duty steel frame
- Stainless steel front
- Stainless steel 24.75" flue riser and shelf
- Removable crumb tray under the top burners
- ¾" rear NPT gas connection

Oven

- 30,000 BTU oven burner
- Flame-failure safety device
- Thermostat adjustable from 200-500°F
- Door liner is coated in nano-porcelain
- Cool-to-touch stainless steel door handle
- Includes 2 removable, adjustable oven racks
- Holds full-size sheet pans

Certifications

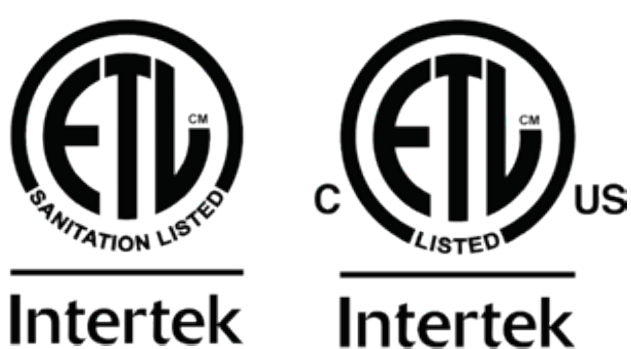

Warranty

1 year parts & labor

MOTAK reserves the right to make changes to the design or specifications without prior notice.

APR2221

MOTAK


Model #:MR4-C-S-3

Commercial Gas Range

4 Burners - 1 Oven

Plan View

- A pressure regulator is provided with this unit.
 - Natural Gas 4.0" W.C.
 - Propane Gas 10.0" W.C.
- Rear Gas Connection ¾" NPT

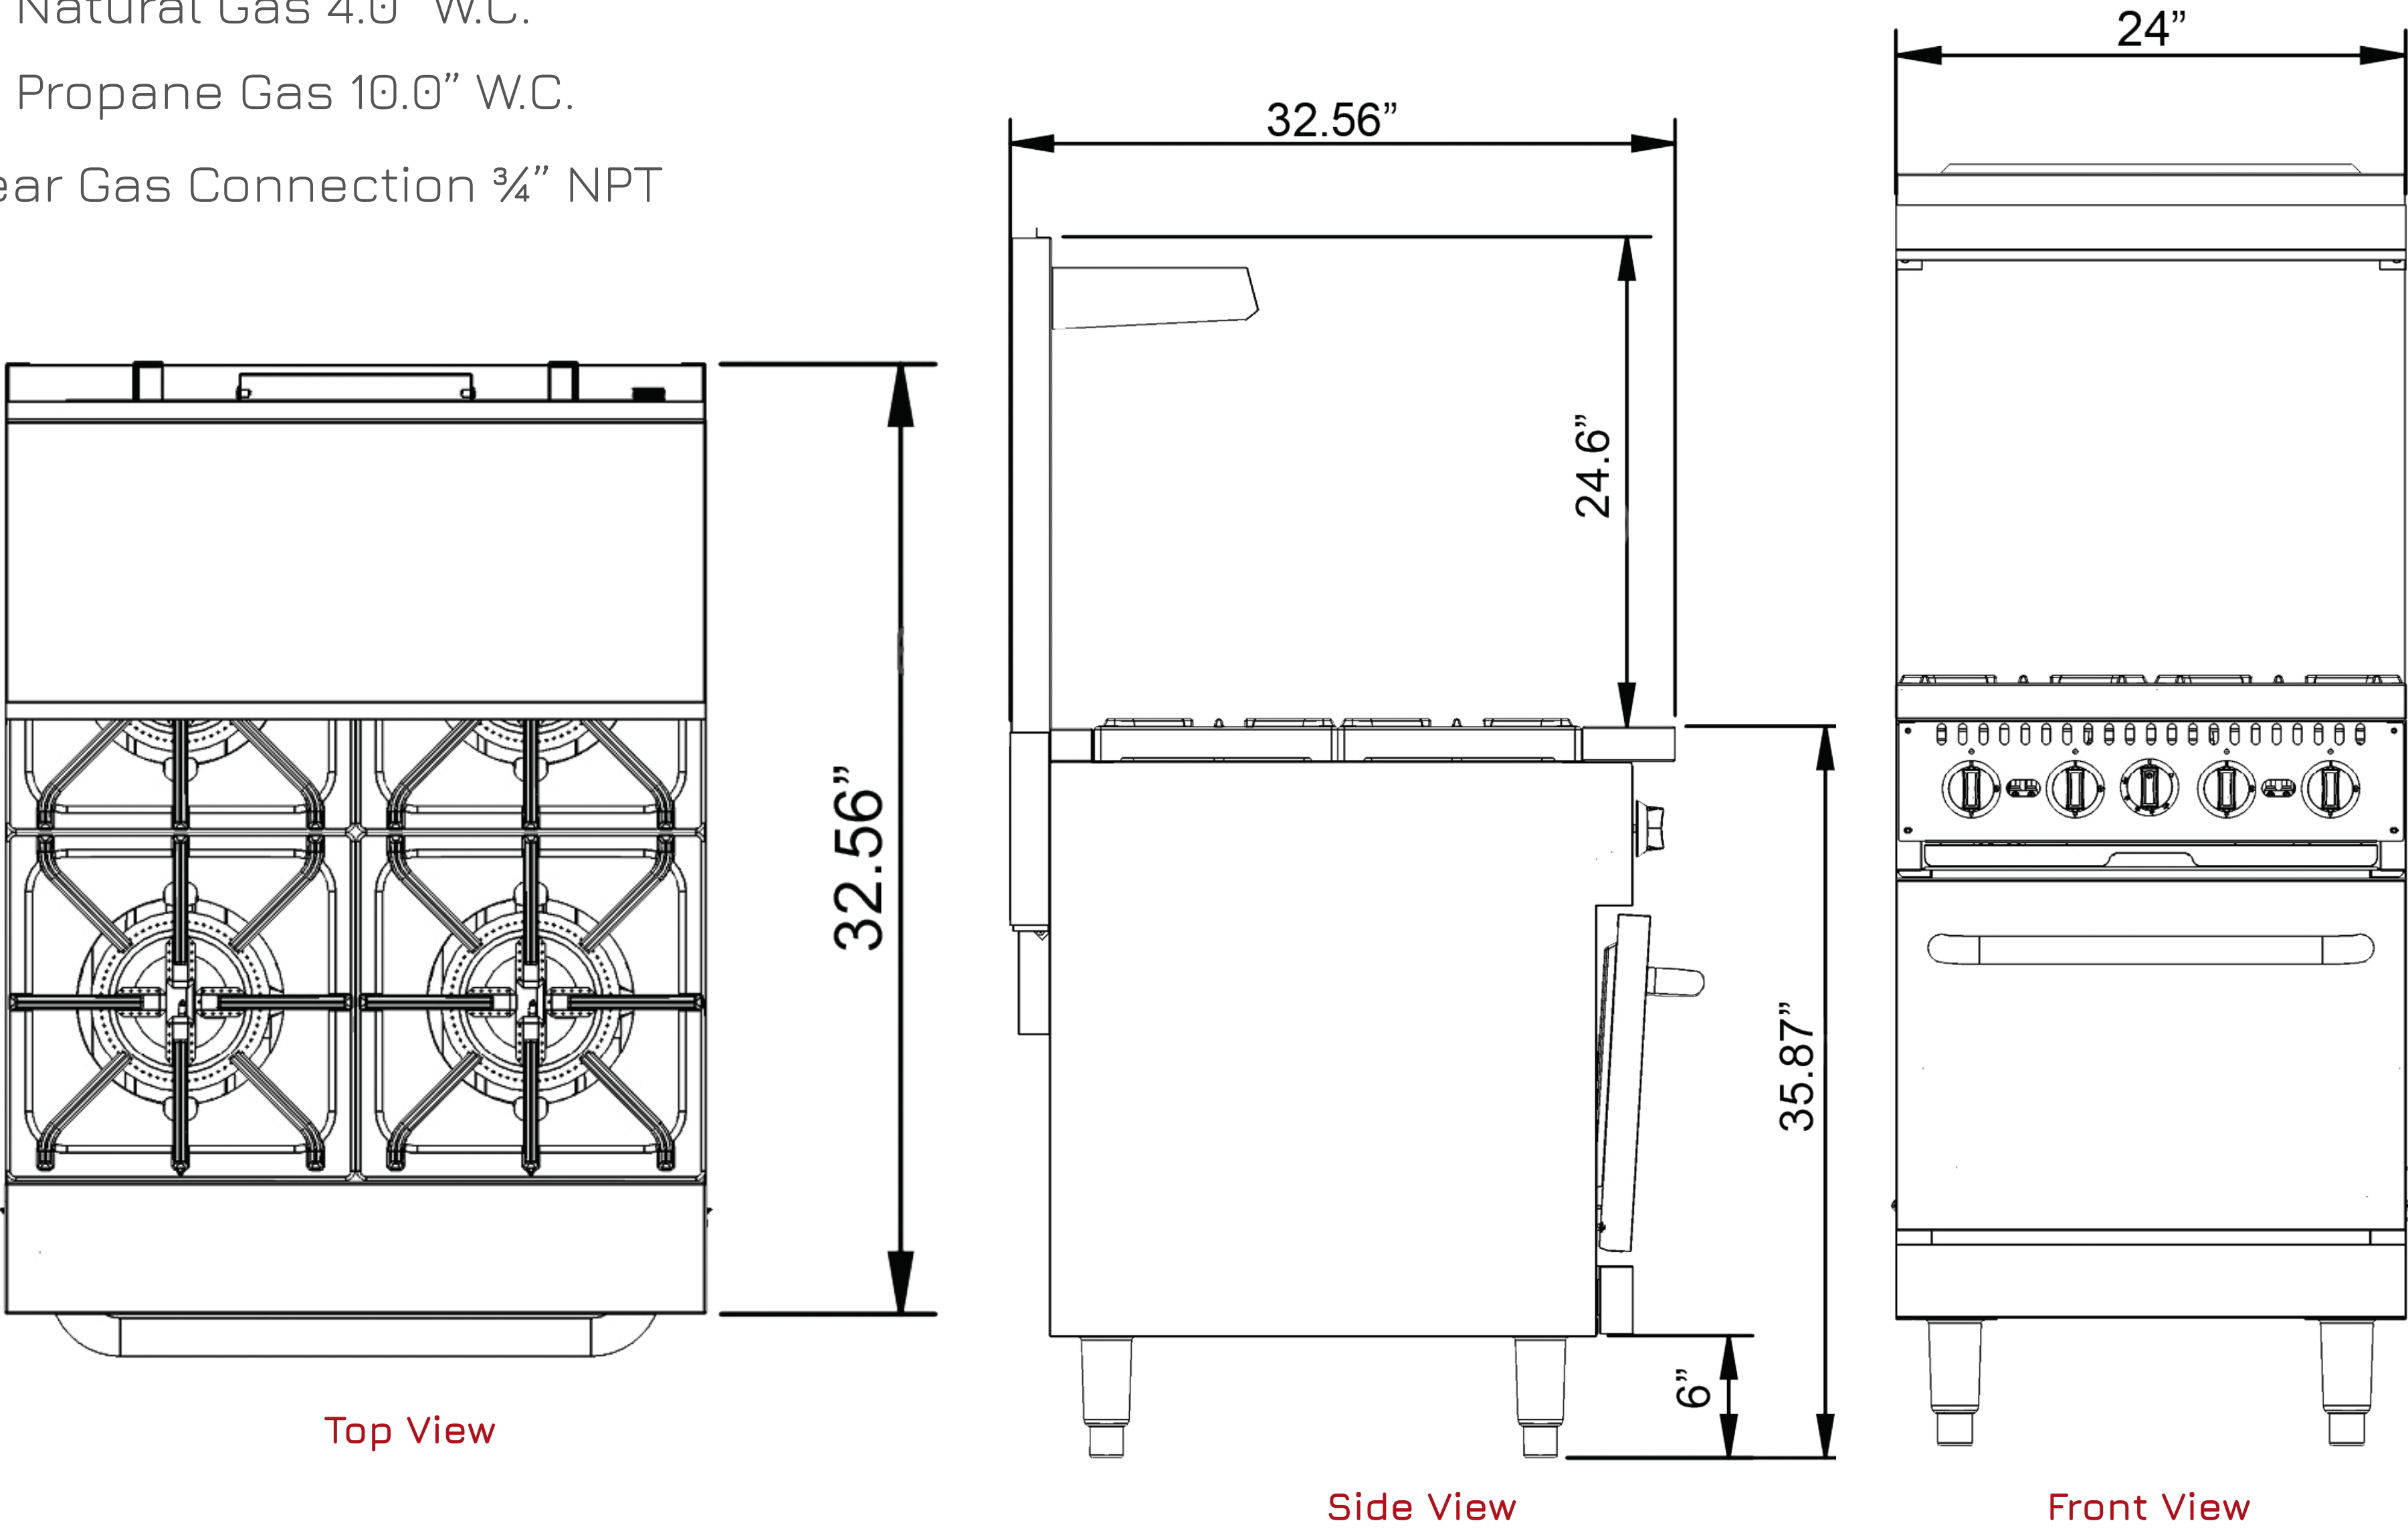

Specifications:

*Pictured with legs. This model comes standard with caster.

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	Total BTU	Crated Weight (lbs)
		Width	Depth	Height	Width	Depth	Height				
MR4-C-S-3	4	24"	32.56"	60.5"	20.6"	25.8"	13.7"	30,000	30,000	150,000	356 lbs.

Not suitable for installation in non-commercial or residential applications.