

MOTAK

Commercial Gas Range 6 Burners - 1 Oven

Model #: **MR6-C-S-3**

This commercial gas range has powerful Planck 30,000-BTU cast iron burners. Each burner has a lift-off head, an individual pilot light, a heavy-duty 12-inch by 12-inch removable cast iron grate, and an instant-light control knob. It has a stainless steel front, 24.75-inch flue riser and shelf, 4 casters (2 locking) and a ¾" NPT gas connection.

The standard oven has a 30,000-BTU burner, two easy-to-remove oven racks, a porcelain liner for easy cleaning, and a compression spring door hinge system for durability. The oven thermostat adjusts from 200-450°F and is equipped with a flame-failure safety device.

Not suitable for installation in non-commercial or residential applications.



Product Details

Standard Features

- 30,000 BTU Planck cast iron burners
 - Lift-off heads
 - Instant-light control knobs
 - Heavy-duty 12" x 12" removable cast iron grates
- Includes 4" swivel casters (2 locking)

Construction

- Heavy-duty steel frame
- Stainless steel front
- Stainless steel 24.75" flue riser and shelf
- Removable crumb tray under the top burners
- ¾" rear NPT gas connection

Oven

- 30,000 BTU oven burner
- Flame-failure safety device
- Thermostat adjustable from 200-450°F
- Door liner is coated in nano-porcelain
- Cool-to-touch stainless steel door handle
- Includes 2 removable, adjustable oven racks
- Holds full-size sheet pans

Certifications



Warranty

1 year parts & labor

MOTAK reserves the right to make changes to the design or specifications without prior notice.

JAN0621

MOTAK


Model #:MR6-C-S-3

Commercial Gas Range

6 Burners - 1 Oven

Plan View

- A pressure regulator is provided with this unit.
 - Natural Gas 4.0” W.C.
 - Propane Gas 10.0” W.C.
- Rear Gas Connection ¾” NPT

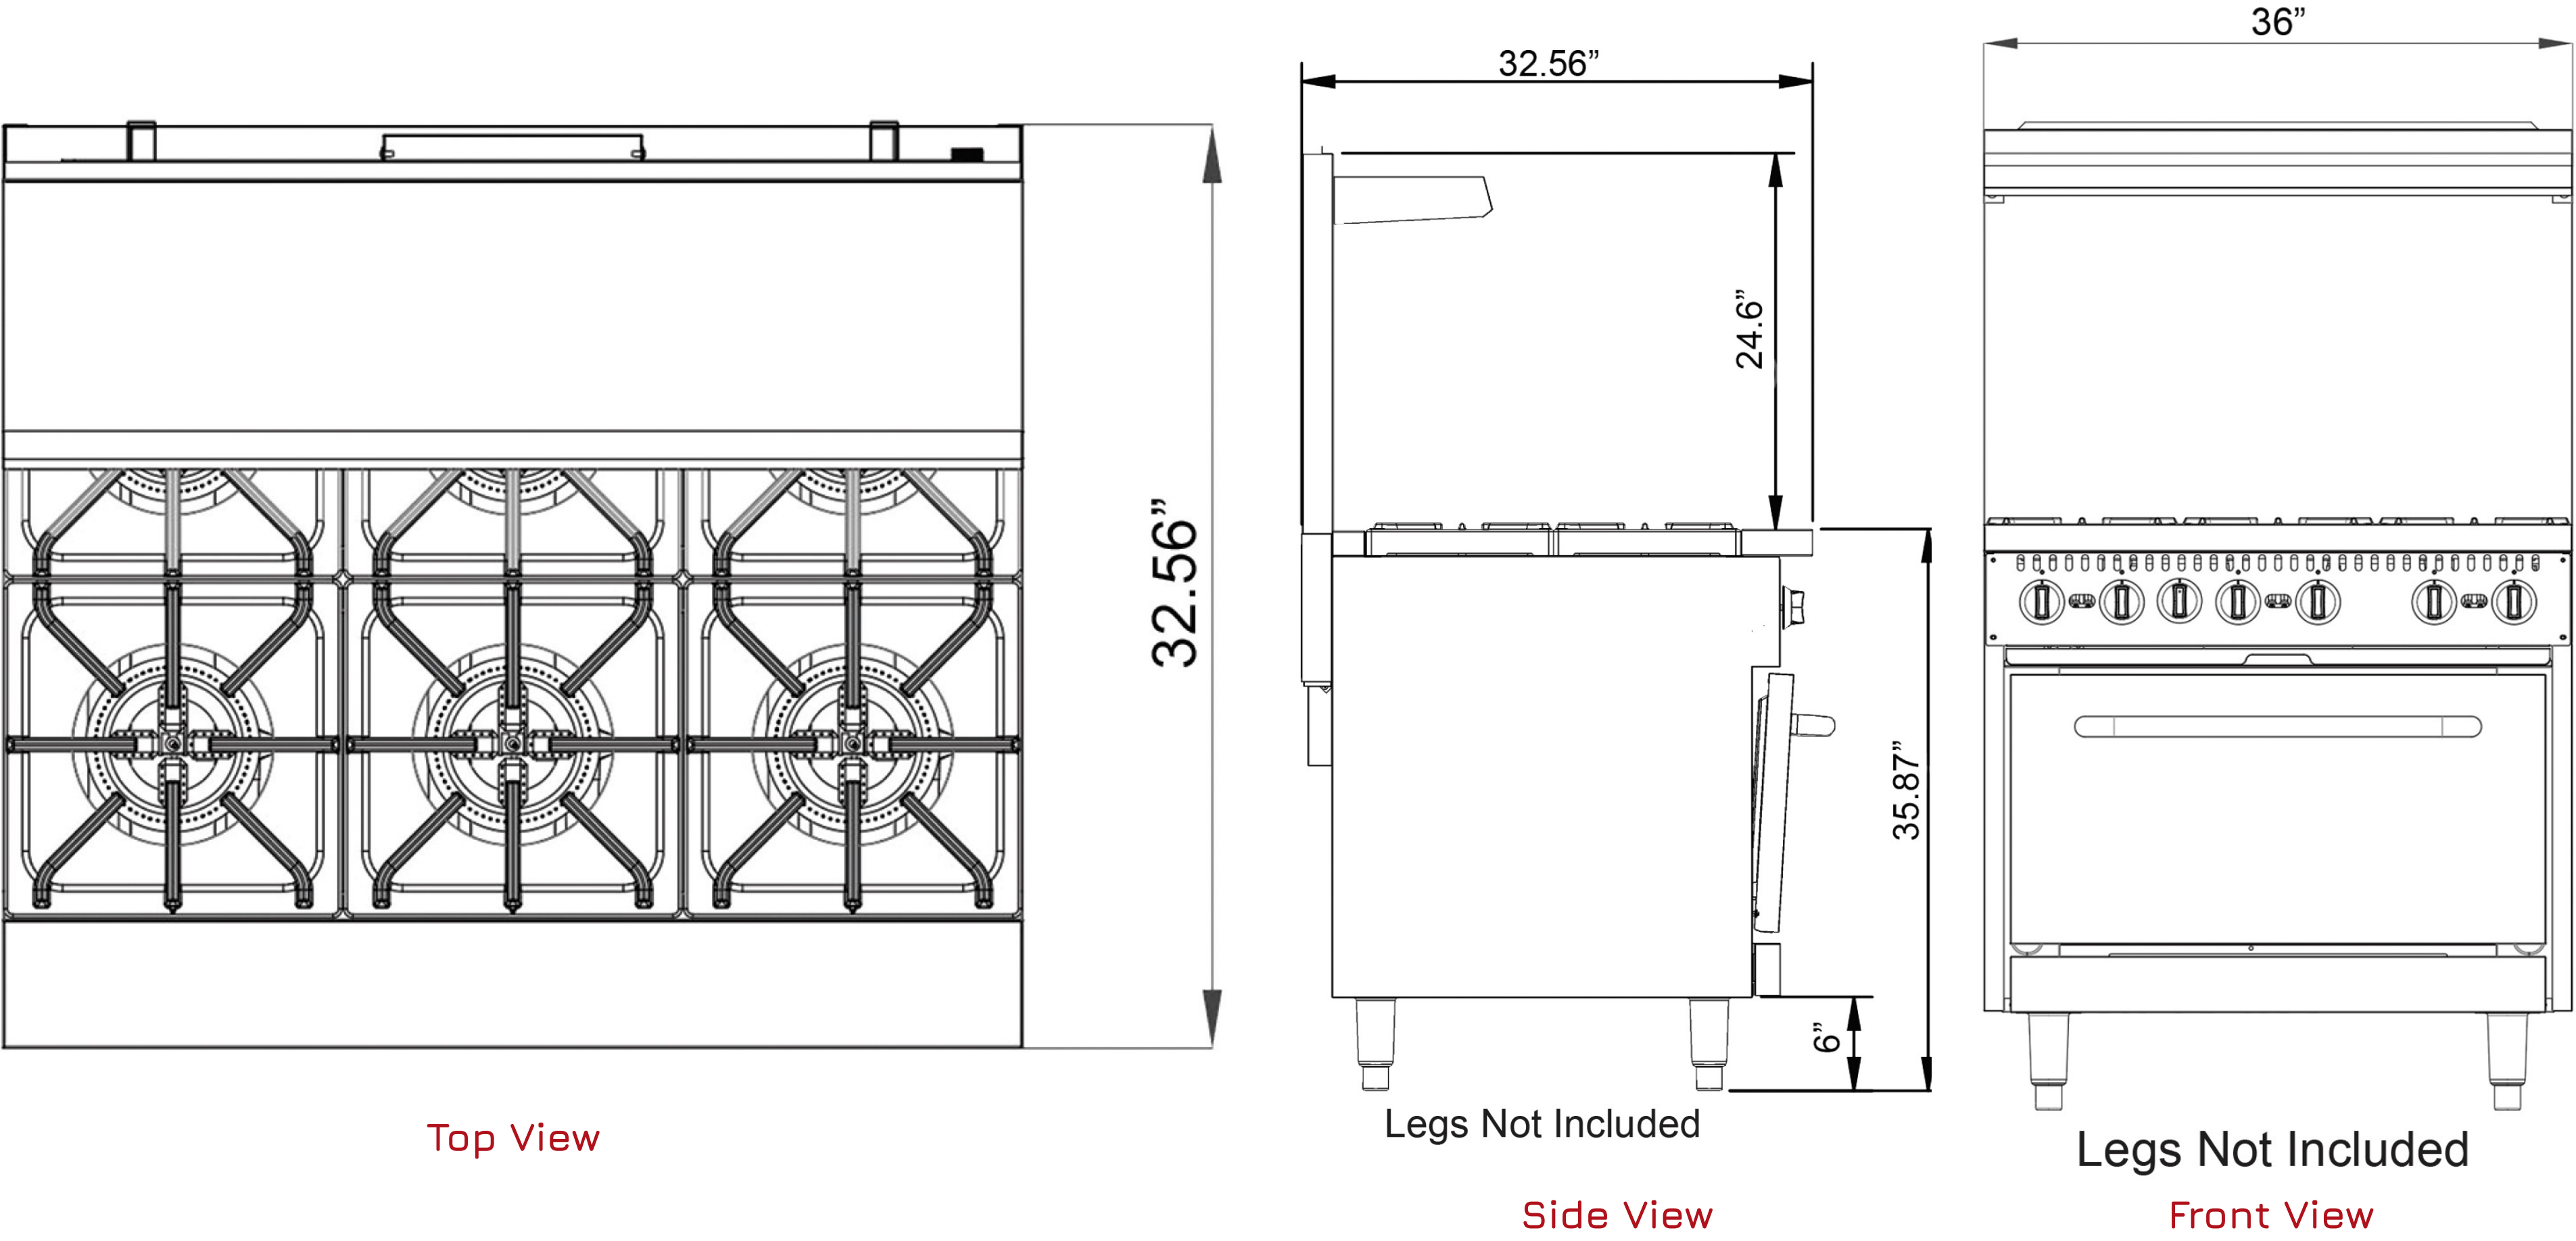

Specifications:

**Pictured with legs. This model comes standard with caster.*

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	Total BTU	Crated Weight (lbs)
		Width	Depth	Height	Width	Depth	Height				
MR6-C-S-3	6	36"	32.56"	60.5"	26.8"	25.8"	13.7"	30,000	30,000	210,000	455 lbs.

Not suitable for installation in non-commercial or residential applications.