

Solid Hinged Lid Chest Freezers


Model #: MCF-16

Product Details

- CFC free refrigerant and 3" foam insulation
- Thermometer supplied
- Operating temperature -11°F to 14°F
- Drainage is in front, easy to collect water
- Fast freeze time
- Extra strong handle (No handle or lock on MDF-5/7/8/10)
- Low noise level
- Internal coved corners, easy to clean
- Coated wire baskets included
- Balance able hinges on the door, stop from 45° to 75° angle
- Door Locks
- Power cord supplied, 6 foot length
- NEMA 5-20P

Not suitable for installation in non-commercial or residential applications.

Certifications

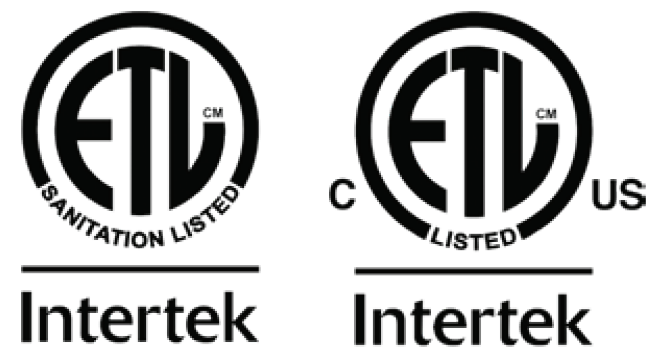

Specifications

Model	# of Doors	# of Baskets	Storage CAP (CU-ft)	Cabinet Dims (in)			HP	Voltage	Amp	NEMA Plug	Cord Length (ft)	Net / Crated Weight
				Width	Depth	Height						
MCF-16	1	2	15.4	60"	29"	33"	1/3	115/60/1	2.8	5-20P	8.2 ft.	138/165

MOTAK reserves the right to make changes to the design or specifications without prior notice.

MAY3123

