

MOTAK

Project Name: _____

Location: _____

Item #: _____

Qty: _____

MoTak Undercounter Freezer, Double Solid Doors, 15.7 cu ft Capacity, in Stainless Steel

MFUC-2S



Maximize your commercial kitchen's efficiency with this MoTak Undercounter Freezer, perfect for frozen storage in restaurants, cafes, and bars. Constructed with a durable stainless steel exterior and two solid doors, this freezer offers a 15.7 cubic foot capacity. It maintains a temperature range of -8° to 0°F, ensuring optimal frozen food preservation. Featuring a fully automatic controller and using eco-friendly R290 refrigerant, it's designed for ease of use and minimal maintenance.

FEATURES AND CONSTRUCTION

- Offers 15.7 cu ft of storage capacity for frozen foods and ingredients
- Equipped with a 1/5 horsepower compressor for efficient cooling
- Constructed with durable stainless steel for longevity and easy cleaning
- Maintains a temperature range of -8° to 0°F for optimal food preservation
- Utilizes R290 refrigerant for an eco-friendly operation
- Operates on 115V with a NEMA-5-15P plug for convenience
- Includes two adjustable wire shelves for versatile storage options
- Equipped with four casters for easy mobility and positioning
- Features a user-friendly automatic controller for precise temperature

ELECTRIC

115V / 60Hz / 1Ph

Cord Length (Inches): 98.40"

Plug Type: NEMA 5-15P

Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

NOMINAL STORAGE CAPACITY

- Cubic Feet: 15.7 cu. ft.

TEMPERATURE

- Holding Temperature (Fahrenheit): -8 - 0


These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

WARRANTY (USA / CANADA)



MOTAK MoTak 2 Door Undercounter Freezer

MFUC-2S

FRONT

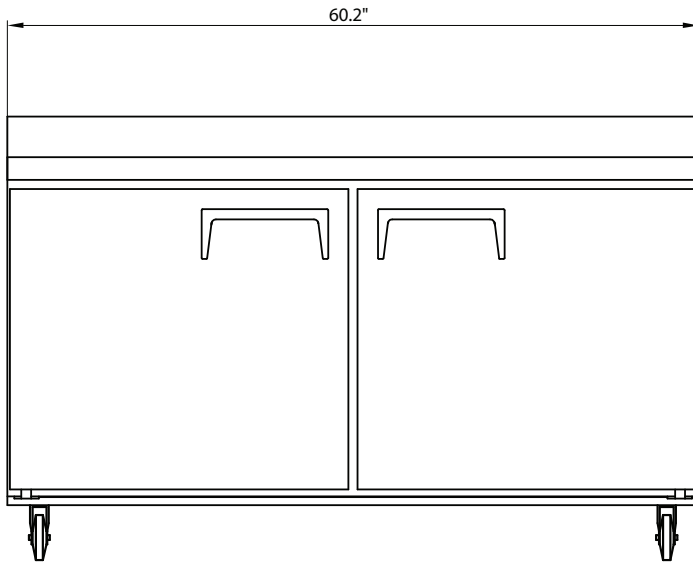

SIDE

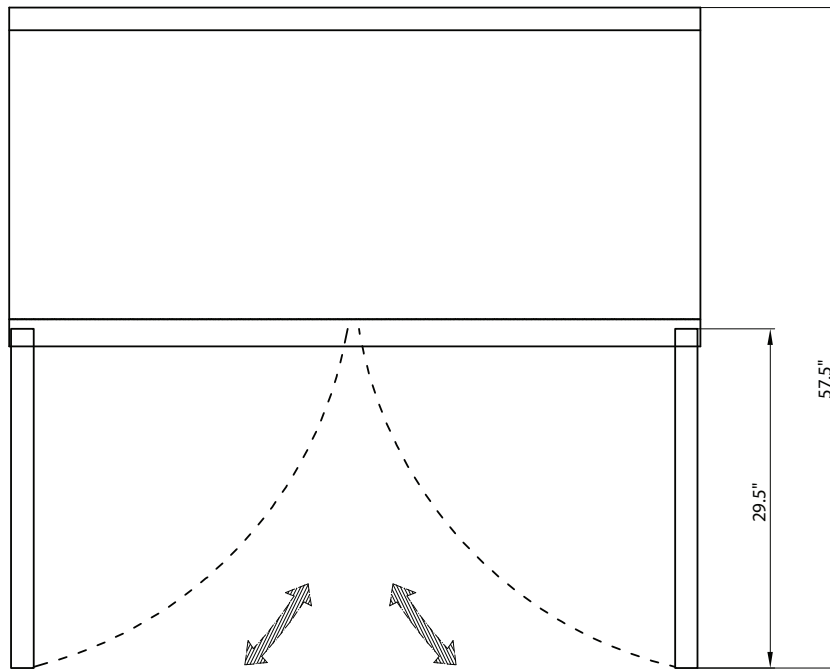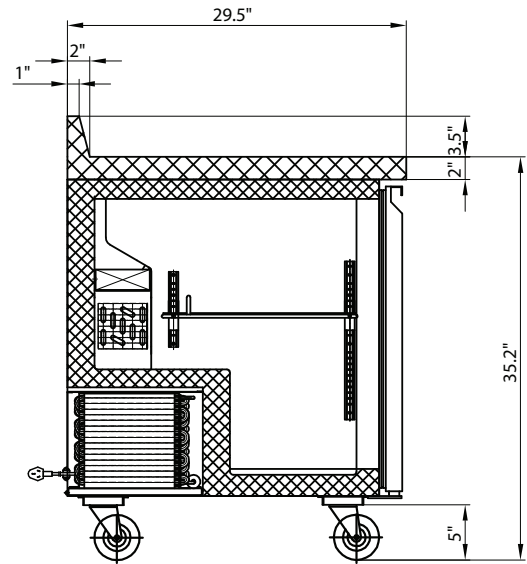

TOP

Undercounter

Doors	Shelves	Amps	HP	Capacity	Refrigerant Type / Ounces	Assembled Dimensions (in)	Item Weight lbs	Shipping Weight lbs
2	2	4.5A	1/5	15.7 cu. ft.	R290 / 3.883	29.50" x 60.20" x 35.20"	253.0	323.00

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.