

# MOTAK

Project Name: \_\_\_\_\_

Location: \_\_\_\_\_

Item #: \_\_\_\_\_

Qty: \_\_\_\_\_

## MoTak Back Bar Cooler, Single Solid Door, 7.8 cu ft Capacity, in Black

### MRBB-1S



Elevate your beverage service with the MoTak Back Bar Cooler, perfect for bars, restaurants, and pubs. Crafted with durable plastic-coated steel doors, it offers a 7.8 cubic feet capacity for storing bottles, cans, and kegs. Maintains a temperature range of 33° to 40°F, ensuring optimal cooling. Equipped with a fully automatic controller and R290 refrigerant for efficient performance. Easy to maintain with manual cleaning, it's a reliable choice for any commercial setting.

### FEATURES AND CONSTRUCTION

- Offers a 7.8 cu ft capacity, perfect for storing a variety of beverages
- Equipped with a compressor cooling system for efficient temperature management
- Constructed with a durable black steel exterior
- Maintains a temperature range of 33° to 40°F for optimal beverage storage
- Uses eco-friendly R290 refrigerant for efficient performance
- Operates on 115V with a NEMA 5-15P plug for convenience
- Includes two adjustable shelves for flexible storage options
- Compact design fits seamlessly into tight bar spaces
- LED lighting enhances visibility and showcases contents
- Automatic defrost system simplifies maintenance

### ELECTRIC

115 / 60Hz / 1Ph

Cord Length (Inches): 110.20

Plug Type: NEMA 5-15P

Cord set included

NEMA 5-15P



### 3RD PARTY APPROVALS



Intertek



Intertek

### WARRANTY (USA / CANADA)

### STORAGE CAPACITY

- Cubic Feet: 7.8 cu. ft.
- (180) 12-oz cans (30 6-packs)

### TEMPERATURE


- Holding Temperature (Fahrenheit): 33° - 40°

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity



# MoTak Single Solid Door Back Bar Cooler

MRBB-1S

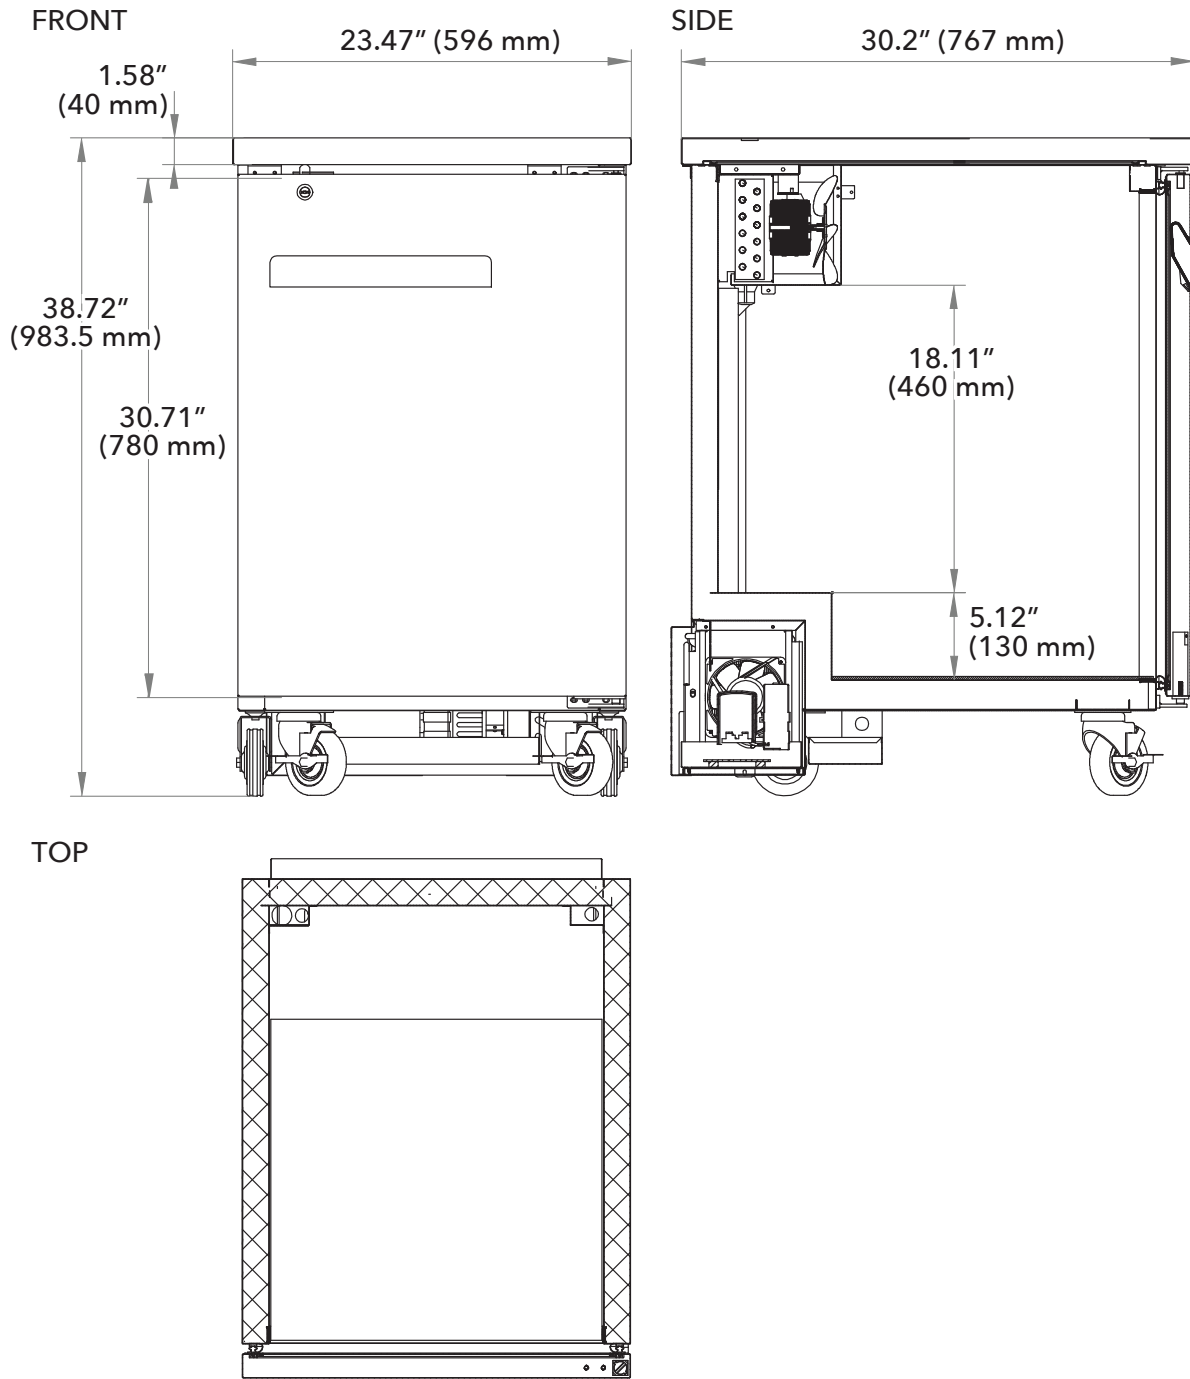

## Back Bar Cooler

Doors	Shelves	Amps	HP	Refrigerant Type / Oz.	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	2	1.92	1/4	R290 2.118	30.27" x 23.47" x 39.80"	132.3	176.0

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.