

MoTak Glass Froster, Single Sliding Door, 4.9 cu ft Capacity, in Black

MRGF-1



Optimize beverage service with this MoTak Glass Froster, designed to enhance the presentation and taste of cold beverages in bars, restaurants, and cafes. Featuring a durable stainless steel door, this froster offers a 4.9 cubic foot capacity, efficiently chilling up to 90 eight-inch mugs or 85 ten-ounce steins. Maintaining temperatures between -5° and 2°F , it ensures glasses are perfectly frosted. Equipped with a fully automatic controller and R290 refrigerant, it promises ease of use and energy efficiency. Cleaning is straightforward with manual defrost and easy-to-clean materials.

FEATURES AND CONSTRUCTION

- Boasts a 4.9 cu ft capacity to accommodate a variety of glassware
- Equipped with a 1/5 horsepower compressor for efficient cooling
- Constructed with a durable stainless steel sliding door for lasting use
- Maintains a temperature range of -5 to 2°F
- Uses eco-friendly R290 refrigerant for efficient performance
- Operates on 115 volts with a NEMA 5-15P plug for easy installation
- Includes four adjustable shelves to fit different glass sizes
- Sliding doors provide easy access to chilled glassware
- Offers a sleek black vinyl exterior for a professional look
- Perfect for pre-chilling glasses for beer, cocktails, and more

ELECTRIC

115 / 60Hz / 1Ph

Cord Length (Inches): 98.40"

Plug Type: NEMA 5-15P

Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

STORAGE CAPACITY

- Cubic Feet: 4.9 cu. ft.
- (90) 8-inch mugs, (85) 10-oz steins


TEMPERATURE

- Holding Temperature (Fahrenheit): -5 - 2

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

MOTAK MoTak 1 Lid Glass Froster

MRGF-1

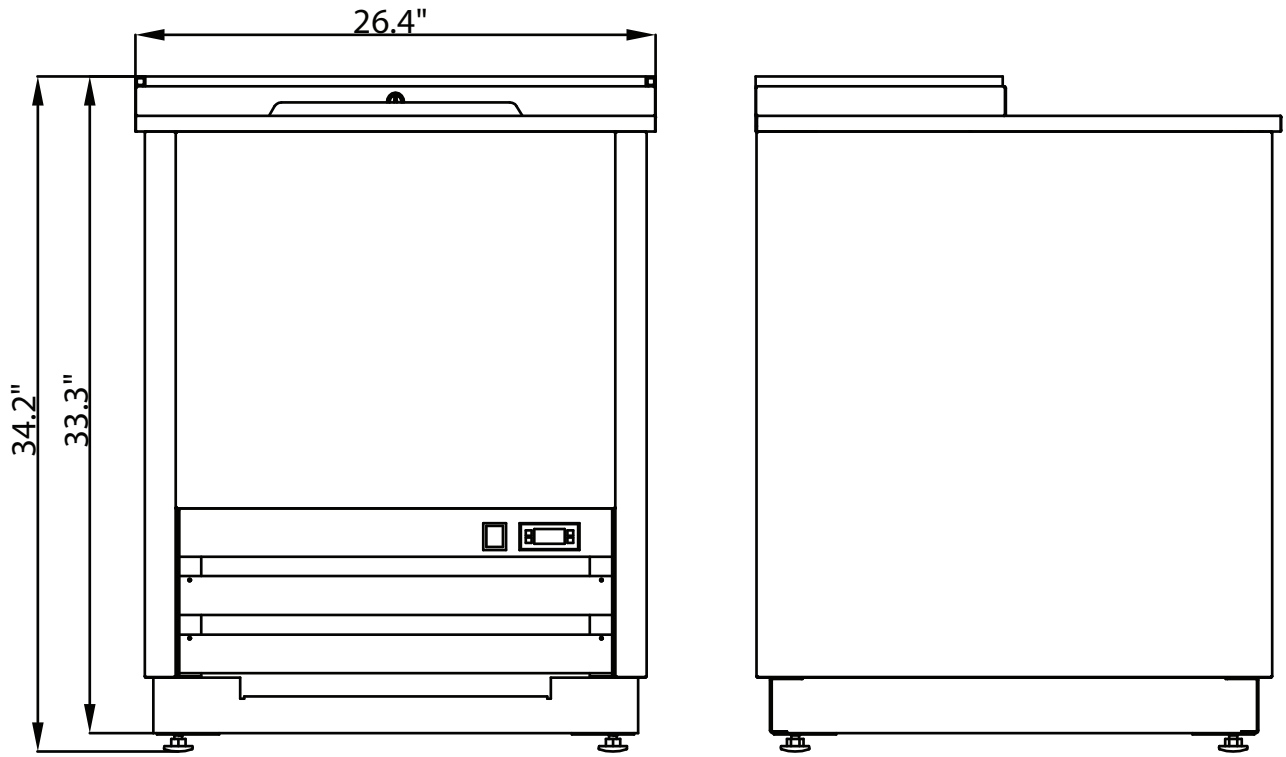

Glass Froster

Lids	Shelves	Amps	HP	Refrigerant Type / Ounces	Assembled Dimensions (in)	Item Weight (lbs)	Shipping Weight (lbs)
1	4	3.3	1/5	R290 / 2.824	26.40" x 26.70" x 34.20"	127.9	158.0

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.