

MOTAK

Project Name: _____

Location: _____

Item #: _____

Qty: _____

MoTak Reach-In Freezer, 4 Doors, 42.8 cu ft Capacity, in Stainless Steel

MRIF-4HS



Built for demanding commercial kitchens, the MoTak 4 Door Reach-In Freezer offers reliability and efficiency for frozen storage. Its stainless steel construction ensures durability and easy maintenance. With a capacity of 42.8 cubic feet, it provides ample space for frozen food and ingredients. The temperature range of -8° to 0°F is ideal for preserving frozen food and ingredients. The digital controller and R290 refrigerant ensure efficient operation, while the automatic defrost feature simplifies maintenance.

FEATURES AND CONSTRUCTION

- Capacity of 42.8 cu ft offers ample frozen storage for commercial kitchens
- Equipped with a powerful compressor for efficient cooling
- Stainless steel construction ensures durability and easy maintenance
- Temperature range of -8° to 0°F for optimal frozen food preservation
- Utilizes eco-friendly R290 refrigerant for sustainable operation
- Operates on 115V with a NEMA-5-15P plug for standard electrical connections
- Includes 6 adjustable shelves to accommodate various frozen items
- Comes with four 4-inch casters for easy mobility and placement
- Integrated locks provide added security for stored items

ELECTRIC

115V / 60Hz / 1Ph
Cord Length (Inches): 108
Plug Type: NEMA 5-15P
Cord set included

NEMA 5-15P



3RD PARTY APPROVALS



Intertek



Intertek

WARRANTY (USA / CANADA)

STORAGE CAPACITY

- Cubic Feet: 42.8 cu. ft.


TEMPERATURE

- Holding Temperature (Fahrenheit): -8 - 0

These models are designed to operate in an environment where temperature and humidity do not exceed 75°F (24°C) and 55% relative humidity

MOTAK MoTak Reach-In Freezer

MRIF-4HS

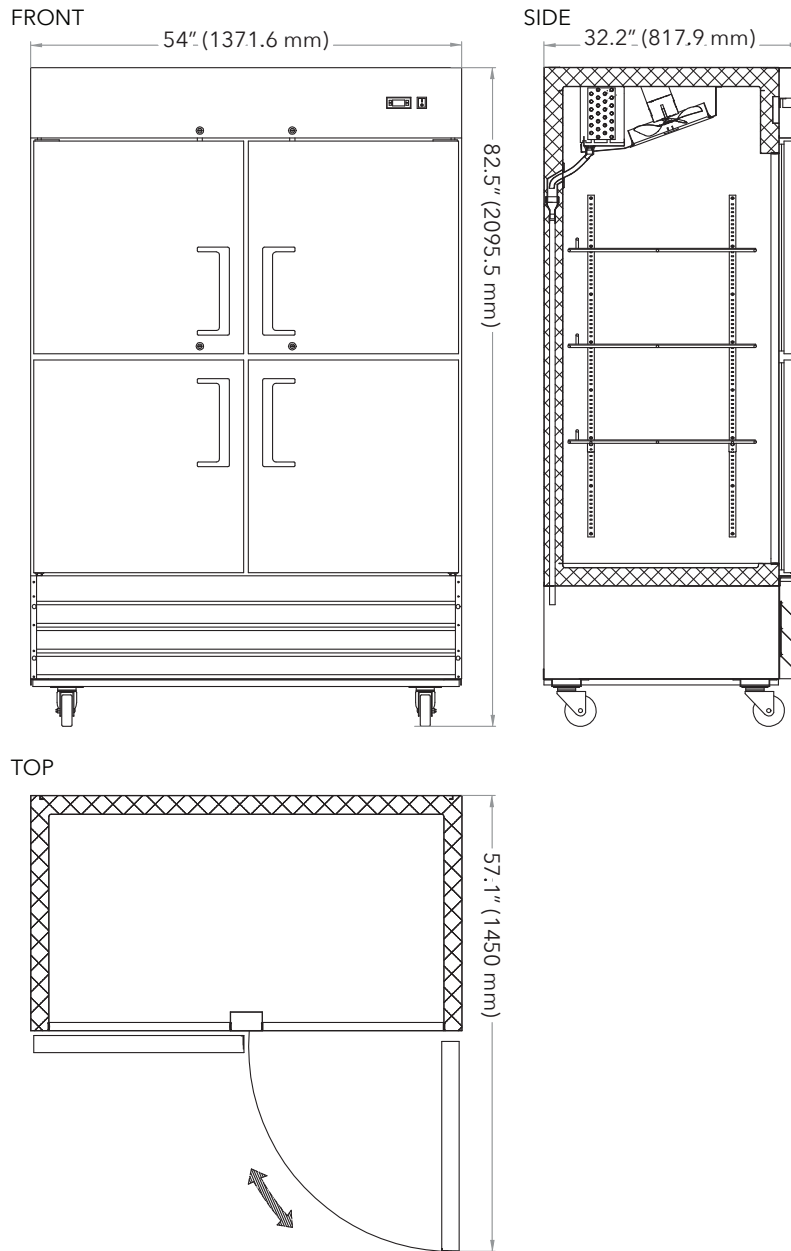

Reach-In

Doors	Shelves	Amps	HP	Refrigerant Type / Oz.	Assembled Dimensions (in)	Item Weight lbs	Shipping Weight lbs
3	6	8.5	1	R290 4.77	32.20" x 54.00" x 82.50"	448.0	468

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this document are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.