



Replacement Hoses

B-0044-V9

TAG:

Flexible Stainless Steel Hose

Architect/Engineering Specifications:


44" flexible stainless steel hose with heat resistant handle, continuous pressure atmospheric vacuum breaker, 3/4-14 UN female outlet and 3/4-14 UN female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and CSA B64.8.

Job Name

Model Specified Quantity

Variations Specified

Date

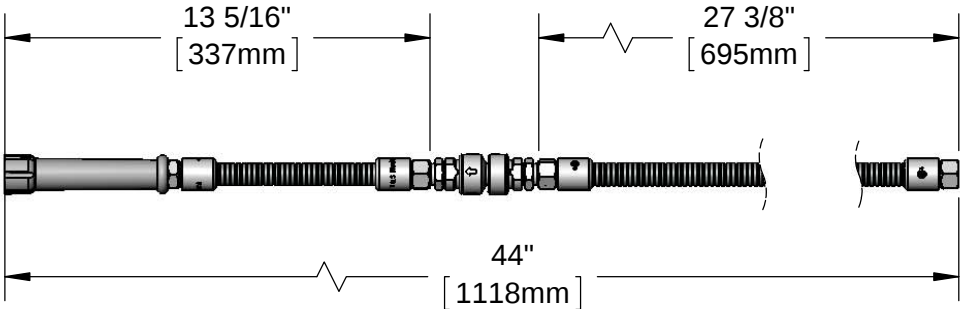

Features & Benefits:

- 44" flexible stainless steel hose with heat resistant gray handle
- Polyurethane inner tubing
- 3/4-14 UN female outlet
- 3/4-14 UN female inlet
- Continuous pressure atmospheric vacuum breaker
- Hose washers included
- Material: Polished chrome plated brass end fittings, thermoplastic handle and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- CSA B64.8

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 3.84 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 02/06/15