



Medical and Lavatory Faucets

B-2490-PA

TAG:

Slow Self-Closing Metering Faucet

Architect/Engineering Specifications:



Single hole, single temperature deck mount with polished chrome plated brass body, 2.2 GPM aerator, metering cartridge, blank pivot action handle, mechanical mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____

Model Specified _____ Quantity _____

Variations Specified _____

Date _____

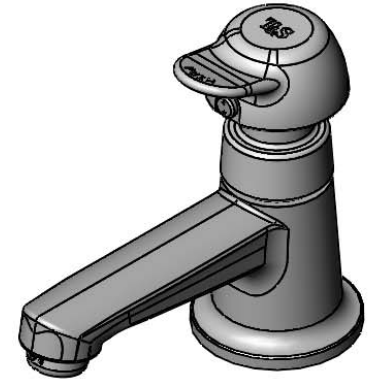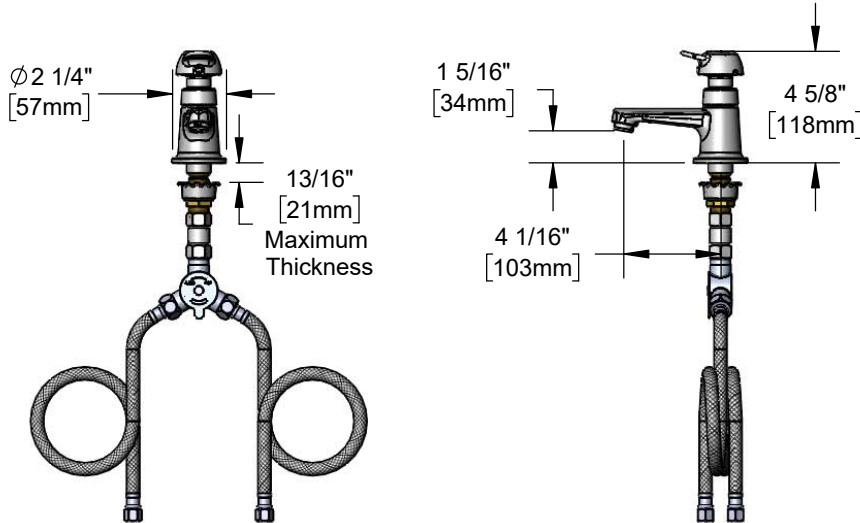

Features & Benefits:

- Single hole, single temperature deck mount faucet w/ polished chrome plated brass body
- 2.2 GPM aerator, Series 3 (B-0199-03)
- Metering cartridge
- Adjustable metering cycle, 10 to 30 seconds
- Blank pivot action handle w/ vandal resistant screw
- Mechanical mixing valve w/ integral check valves
- 18" flexible stainless steel supply hoses with 3/8" compression female inlets
- Material: Polished chrome plated brass body and chrome plated metal handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Warranty: One Year (Limited)



ADA Compliant

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F -140 °F
- Flow Rate: 2.2 GPM @ 60 psi
- Water Consumption: @ 10 sec = .37
@ 15 sec = .55

Optional Outlets (Series 3 / VR Series 8)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	☐ B-0199-03-N035	N/A	☐ B-0199-08-N035
0.5	N/A	☐ B-0199-03-N05	N/A	☐ B-0199-08-N05
1.0	☐ B-0199-03-F10	N/A	☐ B-0199-08-F10	☐ B-0199-08-LF10
1.2	☐ B-0199-03-F12	N/A	☐ B-0199-08-F12	N/A
1.5	☐ B-0199-03-WS	N/A	☐ B-0199-08-WS	☐ B-0199-08-LF15
2.2	Standard	☐ B-0199-26	☐ B-0199-08	☐ B-0199-28

Optional Cartridges

- ☐ Push Button Metering
- ☐ Pivot Action Metering (Standard)
- ☐ Wrist Action Metering



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
Ph 800-476-4103 • Fax 864-834-3518
• Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 04/06/20