

# BAKERY DISPLAY CASES NATURAL Refrigerant

**Self-Cleaning Condenser Equipped Units**

■ **Self-Cleaning Condenser (Patented)**

The accumulation of dust in the condenser can cause the failure or breakdown of refrigerators. Refrigerators run normally until they reach a certain level of accumulation. At some point, when they are over the limit, their performance drops quickly resulting in damage to, or disposal of the stored products inside. The Self-Cleaning Condenser device keeps the condenser clean and prevents system failure by automatically brushing daily.

■ **Hydrocarbon refrigerants (R-290)**

With innovative and eco-friendly technology, Turbo Air brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

■ **Attractive, elegant, glass sided Euro design**

Straight, tempered front & side glass with minimal frame provide full product visibility to optimize display effects. Its elegant contemporary euro design and luxurious colored case will not only enhance any store atmosphere but also will keep product presentation at its best and most beautiful.

■ **High-density polyurethane insulation**

The entire cabinet structure is foamed-in-place using high density, CFC free polyurethane insulation.

■ **Digital temperature controller**

■ **Double pane glass is tempered for safety**


(Front heated glass)

■ **Adjustable, tempered glass shelf with AL front and back edges**

■ **Stainless steel floor and airflow grille**

■ **Rear access to compressor compartment for quick and easy service**

■ **Stainless steel color option available**

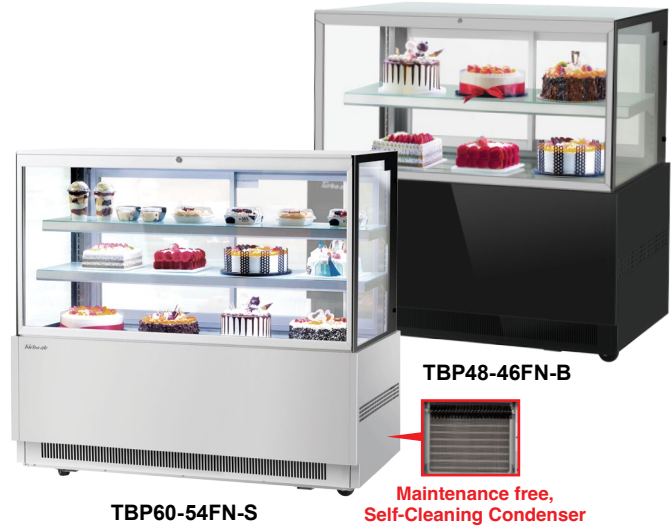

**Sliding rear doors and front glass opening**  
Sliding rear doors make it easily accessible and convenient to arrange products. These doors are built to withstand constant sliding open and close. The front glass opens just enough to clean the interior effortlessly.

■ **Standard features**

- Front glass door lock
- No plumbing required
- Safety shielded LED interior lighting
- White and black colors come standard
- 3" dia. swivel casters with locks on the rear set

- **Recommended operating conditions**

TBP models are designed to operate in an environment where temperature & humidity do not exceed 75°F and 55% respectively.

## TBP-FN MODELS SPECIFICATIONS

ELECTRICAL/DIMENSIONAL DATA	TBP36-46FN-W(B, S)	TBP48-46FN-W(B, S)	TBP60-46FN-W(B, S)
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	① NEMA 5-15P	① NEMA 5-15P	① NEMA 5-15P
Full Load Amp.	6.3	6.8	7.3
Compressor HP	1/3	1/3	3/4
Refrigerant	R-290	R-290	R-290
Net Capacity (cu. ft.)	9	12.4	15.7
Ext. Dimension (L x D x H*) (in.)	35 <sup>3</sup> / <sub>8</sub> x 27 <sup>1</sup> / <sub>2</sub> x 44	47 <sup>1</sup> / <sub>4</sub> x 27 <sup>1</sup> / <sub>2</sub> x 44	59 x 27 <sup>1</sup> / <sub>2</sub> x 44
# of Shelves	1	1	1
Shelf Size (L x D) (in.)	32 <sup>3</sup> / <sub>8</sub> x 15	44 <sup>1</sup> / <sub>8</sub> x 15	56 x 15
Net / Gross Weight (lbs.)	327 / 503	398 / 596	465 / 685

ELECTRICAL/DIMENSIONAL DATA	TBP36-54FN-W(B, S)	TBP48-54FN-W(B, S)	TBP60-54FN-W(B, S)
Voltage	115/60/1	115/60/1	115/60/1
Plug Type	① NEMA 5-15P	① NEMA 5-15P	① NEMA 5-15P
Full Load Amp.	7.0	8.2	8.7
Compressor HP	1/3	3/4	3/4
Refrigerant	R-290	R-290	R-290
Net Capacity (cu. ft.)	12.5	17.2	21.8
Ext. Dimension (L x D x H*) (in.)	35 <sup>3</sup> / <sub>8</sub> x 27 <sup>1</sup> / <sub>2</sub> x 51 <sup>7</sup> / <sub>8</sub>	47 <sup>1</sup> / <sub>4</sub> x 27 <sup>1</sup> / <sub>2</sub> x 51 <sup>7</sup> / <sub>8</sub>	59 x 27 <sup>1</sup> / <sub>2</sub> x 51 <sup>7</sup> / <sub>8</sub>
# of Shelves	2	2	2
Shelf Size (L x D) (in.)	32 <sup>3</sup> / <sub>8</sub> x 13, 32 <sup>3</sup> / <sub>8</sub> x 15	44 <sup>1</sup> / <sub>8</sub> x 13, 44 <sup>1</sup> / <sub>8</sub> x 15	56 x 13, 56 x 15
Net / Gross Weight (lbs.)	362 / 549	433 / 642	505 / 741

Design and specifications subject to change without notice. Most updated spec sheets are available at [www.turboairinc.com](http://www.turboairinc.com).

Actual shipping weight may differ due to extra packing materials for product protection.

\* Height does not include 2-1/4" for caster height.

■ **WARRANTY: 2 Year Parts and Labor Warranty, Additional 3 Year Warranty on Compressor**