Item # _____ C.S.I. Section 11420

OVENS

VC6E SERIES
SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS

Model VC6ED
Shown with optional casters

ENERGY STAR NSF LISTED LISTED

SPECIFICATIONS

Single section, deep depth electric convection oven, Vulcan Model No. (VC6ED) (VC6EC). Stainless steel front, sides and top. Painted legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interior measures 29"w x 26⅛"d x 20"h. Two interior oven lights. Five nickel plated oven racks per section measure 28¼" x 24½". Eleven position nickel plated rack guides with positive rack stops. Heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed ½ H.P. oven blower-motor. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

40¼"w x 45⅛"d (includes motor & door handles) 41¾"d (includes motor only) x 54¾"h on 23¾" legs with feet. 23¾" legs can adjust an additional 1" in length. Legs with casters are adjustable from 28" to 29⅛" in length.

NSF listed. UL listed. UL listed to Canadian safety standards.

- ☐ **VC6ED** Solid state temperature controls adjust from 150° to 500°F. 60 minute timer with audible alarm.
- ☐ **VC6EC** Computer controls with digital time and temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle. One hundred programmable menu selections. Shelf I.D. programming.

STANDARD FEATURES

- ■ Stainless steel front, sides and top.
- ■ Painted legs.
- ■ Independently operated stainless steel doors with double pane windows.
- ■ 12.5 total KW.
- ■ ½ H.P. two speed oven blower-motor.
- ■ Moisture vent.
- ■ Oven cool switch for rapid cool down.
- ■ Porcelain enamel on steel oven interior.
- ■ Five nickel plated oven racks with eleven rack positions.
- ■ One year limited parts and labor warranty.

OPTIONS

- ☐ Complete prison package.
  - ☐ Security screws only.
- ☐ Stainless steel legs.
- ☐ Casters.
- ☐ Simultaneous chain driven doors.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- ☐ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- ☐ Down draft flue diverter for direct vent connection.

a division of ITW Food Equipment Group LLC

P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

F32541 (07/19)

VC6E SERIES
SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS

OPTIONAL VOLTAGES

- ☐ 480 volt, 60 Hz, 3 phase.
- ☐ 220/380 volt, 50 Hz, 1 phase, 3 wire.
- ☐ 220/380 volt, 50 Hz, 3 phase, 4 wire.
- ☐ 240/415 volt, 50 Hz, 3 phase, 4 wire.

CLEARANCES

	Combustible	Non-Combustible
Rear	2"	2"
Right Side	4"	4"
Left Side	1"	1"

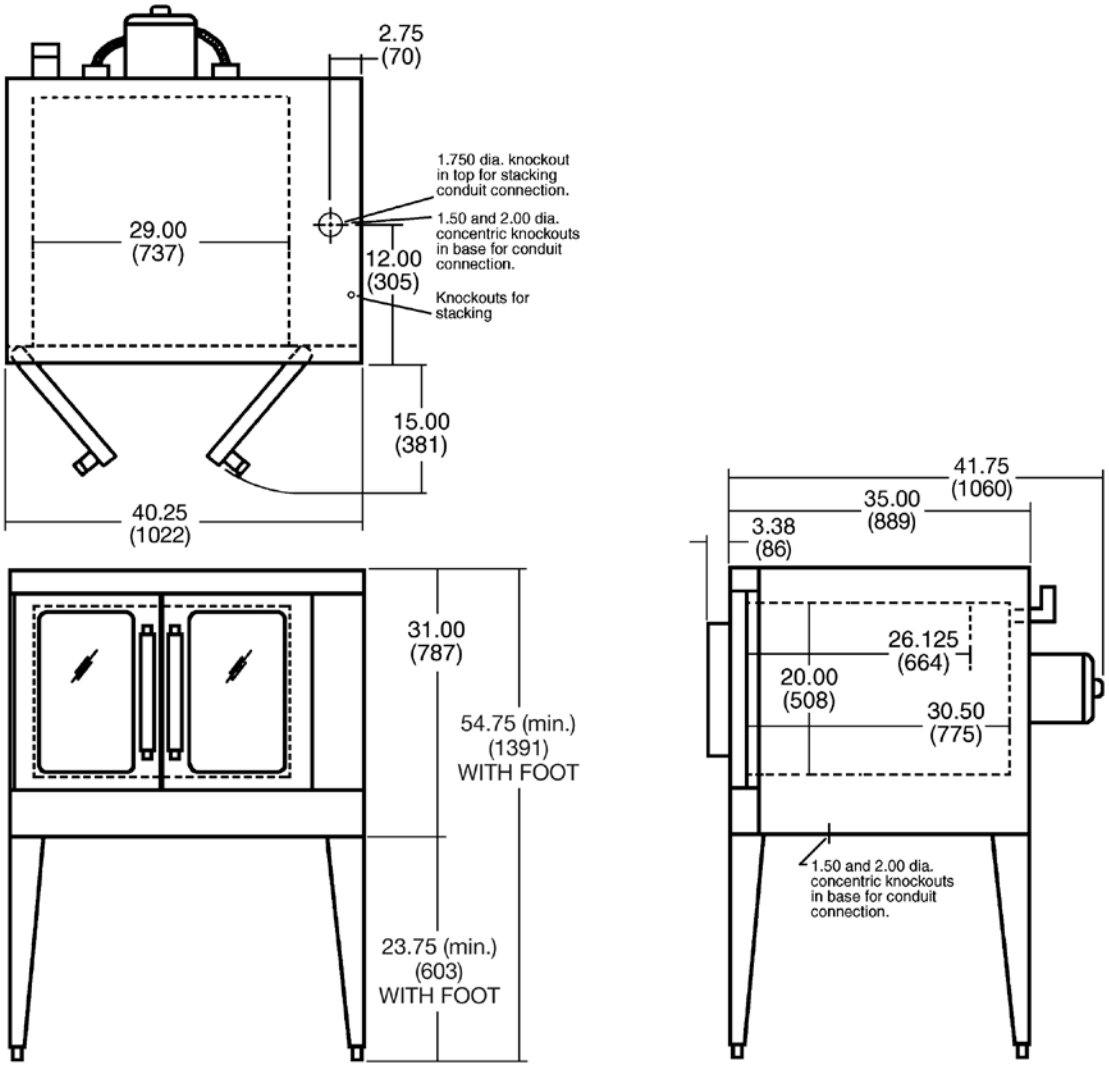

MODEL NO.	TOTAL CONN. KW	3 PHASE LOAD KW PER PHASE			NOMINAL AMPS PER LINE WIRE									1 PHASE		WEIGHT			
					3 PHASE											WITH SKID & PACKAGING		WITHOUT SKID & PACKAGING	
					208 VOLT			240 VOLT			480 VOLT								
		X-Y	Y-Z	X-Z	X	Y	Z	X	Y	Z	X	Y	Z	208V	240V	LBS.	KG	LBS.	KG
VC6E	12.5	4	4	4.5	35	33	35	33	29	33	14	15	15	60	52	463	210	405	184

VULCAN
a division of ITW Food Equipment Group LLC
P.O. Box 696 ■ Louisville, KY 40201 ■ Toll-free: 1-800-814-2028 ■ Local: 502-778-2791 ■ Quote & Order Fax: 1-800-444-0602

NOTE: In line with its policy to continually improve its products, Vulcan reserves the right to change materials and specifications without notice.

Printed On Recycled Paper