EAGLE GROUP®
Profit from the Eagle Advantage®

Specification Sheet

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Gas Water Bath Steam Tables—Open Base

Short Form Specifications

Eagle Hot Food Tables, open base design, model _____. Top and body to be heavy gauge type 430 stainless steel, with top and water pan removable for cleaning or replacement. All top openings sized to accommodate 12″ x 20″ steam table pans. Water pan to be all-welded 20/304 stainless steel, complete with 1½″ diameter brass drain. Burners are straight flow tubular type with energy-saving design for quick starts (15,000 BTU burner on 2- and 3-well openings, 30,000 BTU burner on 4-, 5-, and 8-well openings) and pressure regulator. ½″ NPT pipe connection on right side. Polyethylene 8″-wide cutting board and stainless steel dish shelf provided. Legs to be 1⅝″ O.D. galvanized tubing with galvanized adjustable undershelf, and adjustable non-marking plastic bullet feet.

*#AWT3-NG unit with optional Flex-Master® Overshelf System**

MODELS:

❑ ***AWT2-NG***	❑ ***AWT5-NG***	❑ ***ASWTP4-NG***	❑ ***305171***
❑ ***AWTP2-NG***	❑ ***AWTP5-NG***	❑ ***ASWT4-NG-1***	❑ ***305172***
❑ ***AWT3-NG***	❑ ***ASWT2-NG***	❑ ***ASWTP4-NG-1***	❑ ***305259***
❑ ***AWTP3-NG***	❑ ***ASWTP2-NG***	❑ ***ASWT5-NG***	❑ ***305313***
❑ ***AWT4-NG***	❑ ***ASWT3-NG***	❑ ***ASWTP5-NG***	❑ ***305314***
❑ ***AWTP4-NG***	❑ ***ASWTP3-NG***	❑ ***305169***	❑ ***305315***
❑ ***AWT4-NG-1***	❑ ***ASWT4-NG***	❑ ***305170***	❑ ***305316***
❑ ***AWTP4-NG-1***			

Models listed are units with natural gas. For units with liquid propane, replace suffix "-NG" with "**-LP**". Example: AWT3-**LP**

Construction

- Table body and top constructed of highly polished 20 gauge 430 series stainless steel.
- Top has openings sized to accommodate 12″ x 20″ (305 x 508mm) food pans.
- Poly cutting board 8″ (203mm) wide and ½″ (32mm) thick is mounted on stainless steel brackets located on control side of unit.
- Cutting board and stainless steel dish shelf are standard on all models.
- Legs are 1⅝″ (42mm) O.D. galvanized tubing fitted with adjustable, non-marking plastic feet.
- Undershelf constructed of galvanized steel.

Water pan

- 20 gauge 304 stainless steel all-seamless construction, complete with 1½″ (38mm) diameter brass drain.

Burner assembly

- Constructed of aluminized steel with straight flow energy-saving design for quick startup.
- 15,000 BTU burner on 2- and 3-opening models; 30,000 BTU burner on 4-, 5-, and 8-opening models.
- ½″ (13mm) N.P.T. pipe connection is on right side.
- Available in LP gas.

Optional safety pilot

- AGA design certified, complete with high performance cast aluminum automatic shut-off valve and pressure regulator.

Options / Accessories

❑ Bolted-in undershelf
❑ Tray slides/shelf
❑ Rolltop cover
❑ Serving shelf
❑ Top adapters
❑ Food pans/insets
❑ AutoFill® automatic water fill system

* See Catalog Sheet #**EG30.18** for more information on Flex-Master® overshelves

Certifications / Approvals

NSF · GAS-FIRED c UL us LISTED

New York MEA 318-84-E

AutoQuotes

KCL

EAGLE GROUP
100 Industrial Boulevard
Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440
Fax: 302-653-2065
www.eaglegrp.com • www.eaglemhc.com

For custom configuration or fabrication needs, contact our **SpecFAB® Division.**
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Spec sheets available for viewing, printing or downloading from our online literature library at *www.eaglegrp.com*

Eagle Foodservice Equipment, Eagle MHC, and SpecFAB® are divisions of Eagle Group. ©2021 by the Eagle Group

EAGLE GROUP®
Profit from the Eagle Advantage®

Item No.: _____
Project No.: _____
S.I.S. No.: _____

Gas Water Bath Steam Tables—Open Base

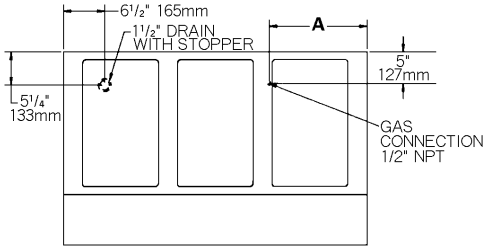

FRONT VIEW

Dimension **A**	
2 well	8″ (203mm)
3 well	15½″ (294mm)
4 well	15½″ (294mm)
5 well	23″ (584mm)

Note: models #AWT4-NG-1 and AWTP4-NG-1 are provided with (2) 12″ x 20″, (2) 6½″ round openings, and (4) 8½″ round openings. See "8-well" line art below.

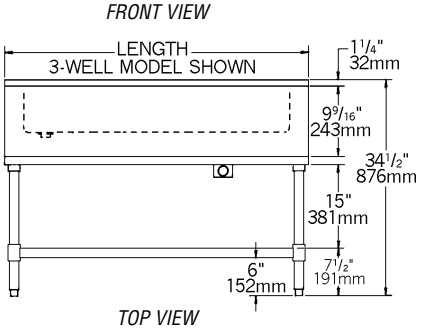

TOP VIEW



SIDE VIEW

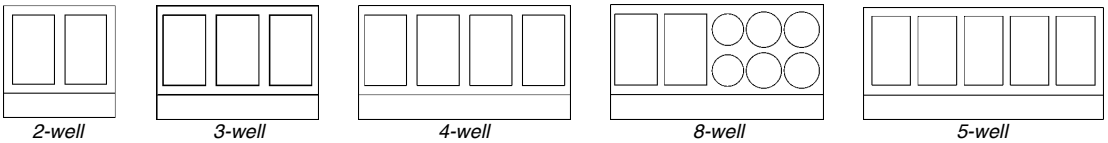
2-well *3-well* *4-well* *8-well* *5-well*

description	# of top openings	length in.	length mm	WITH GALVANIZED LEGS AND UNDERSHELF model #	weight lbs.	weight kg	WITH STAINLESS STEEL LEGS AND UNDERSHELF model #	weight lbs.	weight kg	REPLACEMENT TOP model #	REPLACEMENT WATER PAN model #
natural gas ("NG")	2	33″	838	***AWT2-NG***	73	33.1	***ASWT2-NG***	76	34.5	***305169***	***305315***
NG w/safety pilot	2	33″	838	***AWTP2-NG***	73	33.1	***ASWTP2-NG***	76	34.5	***305169***	***305315***
natural gas ("NG")	3	48″	1219	***AWT3-NG***	127	57.6	***ASWT3-NG***	132	59.9	***305170***	***305313***
NG w/safety pilot	3	48″	1219	***AWTP3-NG***	127	57.6	***ASWTP3-NG***	132	59.9	***305170***	***305313***
natural gas ("NG")	4	63½″	1613	***AWT4-NG***	198	89.8	***ASWT4-NG***	205	93.0	***305171***	***305314***
NG w/safety pilot	4	63½″	1613	***AWTP4-NG***	198	89.8	***ASWTP4-NG***	205	93.0	***305171***	***305314***
natural gas ("NG")	8	63½″	1613	***AWT4-NG-1***	198	89.8	***ASWT4-NG-1***	205	93.0	***305259***	***305314***
NG w/safety pilot	8	63½″	1613	***AWTP4-NG-1***	198	89.8	***ASWTP4-NG-1***	205	93.0	***305259***	***305314***
natural gas ("NG")	5	79″	2007	***AWT5-NG***	256	116.1	***ASWT5-NG***	265	120.2	***305172***	***305316***
NG w/safety pilot	5	79″	2007	***AWTP5-NG***	256	116.1	***ASWTP5-NG***	265	120.2	***305172***	***305316***

To order units with liquid propane in place of natural gas, replace suffix "-NG" with "**-LP**". Example: AWT3-**LP**

FLEX-MASTER® Overshelf Kits

Both kits include two 16/304 overshelves and four 30″ *(762mm)* posts. Add suffix specified to order kit **(example: DHT2-120-FMU)**, or design your own using standard components from EG30.18.

description	add suffix
10″ *(254mm)* overshelves	***-FM***
15″ *(381mm)* overshelves, plus one ladle rack	***-FMU***

EAGLE GROUP
100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com • www.eaglemhc.com

Printed in U.S.A.
©2021 by Eagle Group
Rev. 03/21

Spec sheets available for viewing, printing or downloading from our online literature library at *www.eaglegrp.com*

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.