

DELTA NG 80 R290

115 V / 60 Hz

SELF-CONTAINED ICE CUBE MACHINE

FEATURES

- ▶ PRODUCES SOLID GOURMET CRYSTAL CLEAR ICE CUBES
- ▶ A3S: ANTI-SCALE SPRAY SYSTEM. ITV PATENTED SPRAY SYSTEM WITH FLEXIBLE NOZZLES THAT AVOID LIMESCALE DEPOSITS WITH SMALL VIBRATIONS
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKIN OR SIMILAR) WITHOUT COOLING
- ▶ "NEVER STOP" MOTOR PUMP DEVELOPED BY ITV. PUMP WITHOUT SEALS, WHICH AVOIDS DETERIORATION IN HARD WATER
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM



Anti-scale
spray system
A3S



EASI
Easy Access for
Service &
Installation



STIF
Strong
Inox
Frame



SILENT
RAIN



FRONT
VENTILATION

		 70°F/20°C	 50°F/10°C	 90°F/32°C	 70°F/21°C				
		lbs (Kg)	lbs (Kg)	lbs (Kg)	lbs (Kg)	in (mm)	in (mm)	in (mm)	
DELTA NG 80 A		77 (35)	64 (29)	33 (15)	33 (15)	Width 15.95"(405) Depth 20.28"(515) Height* 29.30"(744)	Width 18.90"(480) Depth 22.84"(580) Height 35.44"(900)		DELTA 40gr 1.57" (Ø) x 1.73" (H) 40 (Ø) x 44 mm (H) Average dimensions
DELTA NG 80 W		- (-)	- (-)						

* WITH LEGS 33.43"/35.40" (849/899)

ACCESSORIES

INCLUDED



6" HEIGHT ADJUSTABLE LEG KIT



SCOOP

NOT INCLUDED (OPTIONAL)



ANTI-LIMESCALE
FILTER



10" FILTER ANTI-LIMESCALE
+ ANTI-CHLORINE
CS-101 K



PARTICLE FILTER




C4 WATER SOFTENER



SCALE KLEEN

TECHNICAL SCHEME

DELTA NG 80

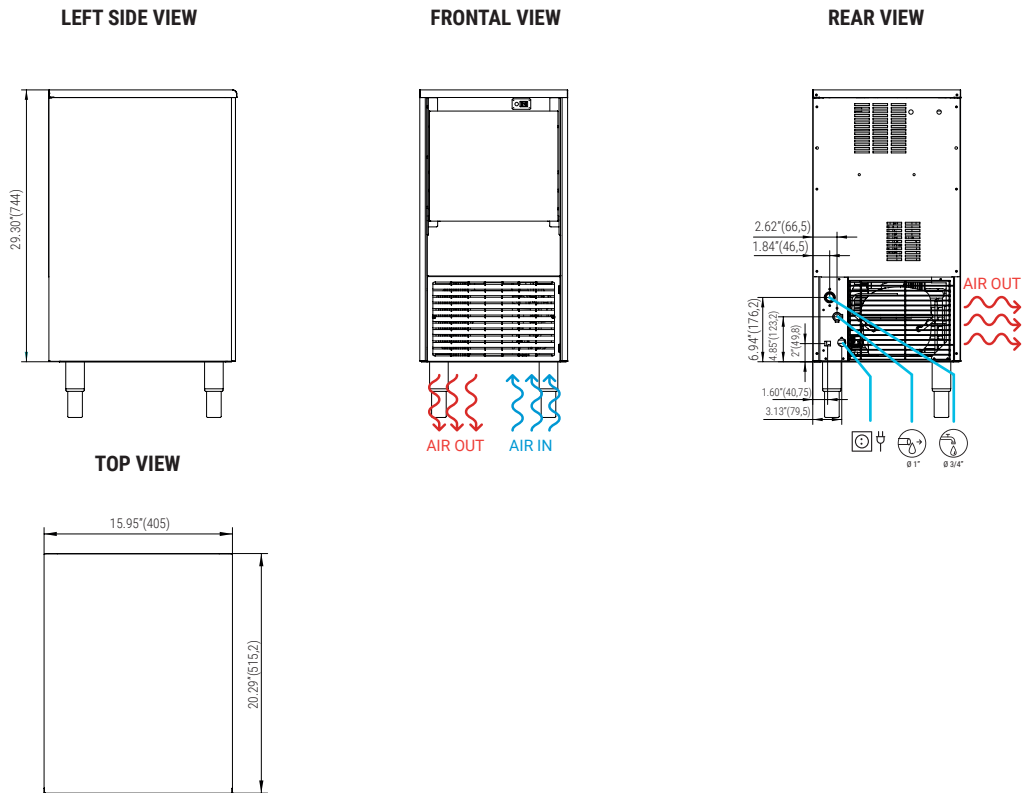

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

	±10% V	41°F/109°F	41°F/95°F	14.5 psi (1 bar) / 87 psi (6 bar)	18 Ice cubes/cycle	R290	V	Hz	ph	DELTA NG 80 AIR COOLED						DELTA NG 80 WATER COOLED					
										50° 10°	60° 15°	70° 21°	86° 30°	50° 10°	60° 15°	70° 21°	86° 30°	50° 10°	60° 15°	70° 21°	86° 30°
										77	75	73	71	-	-	-	-	-	-	-	-
										68° 21°	77	73	71	66	-	-	-	-	-	-	-
										90° 32°	68	66	64	60	-	-	-	-	-	-	-
										109° 43°	53	48	42	40	-	-	-	-	-	-	-

MODELS

	ASHRAE CONDITIONS (BTu/h) (W)	(W) 109°F	(A)	(AWG/mm²) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)
DELTA NG 80 A	3,449 1,011	251	-	16/1.5 3	10	9.9	33.3 3.1	1,992 584	84	101
DELTA NG 80 W	-	-	-	-	-	-	-	-	-	-



ITV Ice Makers, Inc.
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com



SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST



2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

