



Koolaire KP0700 Ice Cube Machine on K570 Bin.
Ice machine and bin sold separately.

KP0700

Koolaire Ice Cube Machine

KDP0700A | KYP0700A | KDP0700W | KYP0700W

ICE SHAPES



▶ **Half-Dice:** 3/8" x 1 1/8" x 7/8"
(0.95 x 2.86 x 2.22 cm)



▶ **Dice:** 7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)

SIZE

- ▶ Up to 641 lbs (290.75 kgs) of daily ice production
- ▶ 30" (76.20 cm) wide, 34" (86.36 cm) deep, and 59.5" (151.13 cm) high including 6" (15.24 cm) legs
- ▶ 532 lb (241 kgs) ice bin storage capacity*

*Application capacity based on 90% volume x 33 lbs./ft³ average density of ice

SPECIFICATIONS

Refrigerant: R290

- ▶ Air-cooled: 11 oz (310 g)
- ▶ Water-cooled: 11 oz (310 g)

BTU Per Hour

- ▶ 9,470 (average)
- ▶ 11,510 (peak)

Operating Limits

- ▶ Ambient temperature range: 40° to 110°F (4.4° to 43.3°C)
- ▶ Water temperature range: 35° to 90°F (1.7 to 32.2°C)
- ▶ Water pressure ice maker (water in)
 - Min. 20 psi (137.9 kPa)
 - Max. 80 psi (551.1 kPa)
- ▶ Condenser inlet water in (water-cooled only)
 - Min. 20 psi (137.9 kPa)
 - Max. 275 psi (1,896.06 kPa)

Power

- ▶ 203-208/60/1 standard
- ▶ Minimum circuit ampacity:
 - Air-cooled: 6.6
 - Water-cooled: 6.3
- ▶ Maximum Fuse Size
 - Air Cooled: 15 Amps
 - Water cooled: 15 Amps

FEATURES / BENEFITS

- ▶ AHRI performance certified
- ▶ Energy-efficient model (see EnergyStar.gov)
- ▶ Durable nickel-plated copper evaporators (Made in Manitowoc, WI)
- ▶ Simple 3-position control: ON / OFF / CLEAN
- ▶ Smudge-resistant stainless-like exterior
- ▶ R290 offers a 99.86% GWP reduction compared to R410A
- ▶ Front-facing evaporator for easy access
- ▶ One-touch cleaning—just add chemical, no ice removal needed
- ▶ Tool-free removal of food zone components
- ▶ Smooth, white plastic interior for quick wipe-downs
- ▶ Sealed food zone with commercial-grade gaskets
- ▶ Alpha San antimicrobial protection in key parts

ACCESSORIES

- ▶ LuminIce® II Virus and Bacteria Inhibitor controls viruses and bacteria in the ice machine
- ▶ Dispenser Bin Thermostat Kit Reduces condensation when used with dispensers
- ▶ Arctic Pure® Pro Water Filters Reduces sediments and chlorine contaminants down to 0.5 microns Use with a pre-filter is recommended



LuminIce II



Thermostat Kit



Arctic Pure Water Filters

KP0700

Koolaire Ice Cube Machine

KDP0700A | KYP0700A | KDP0700W | KYP0700W


INSTALLATION

Ice machine must be installed indoors.

Required clearance for

- Top / Sides: 8" (20.3 cm)
- Back: 5" (12.7 cm)

- A** Electrical Entrance (2) Options
- B** 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- C** 1/2" (1.27 cm) F.P.T. Ice Making Water Outlet
- D** 1/2" (1.27 cm) Condenser Water Outlet (water cooled units)
- E** 3/8" (0.95 cm) F.P.T. Condenser Water Inlet (water cooled units)
- F** 3/4" (1.91 cm) Bin Drain

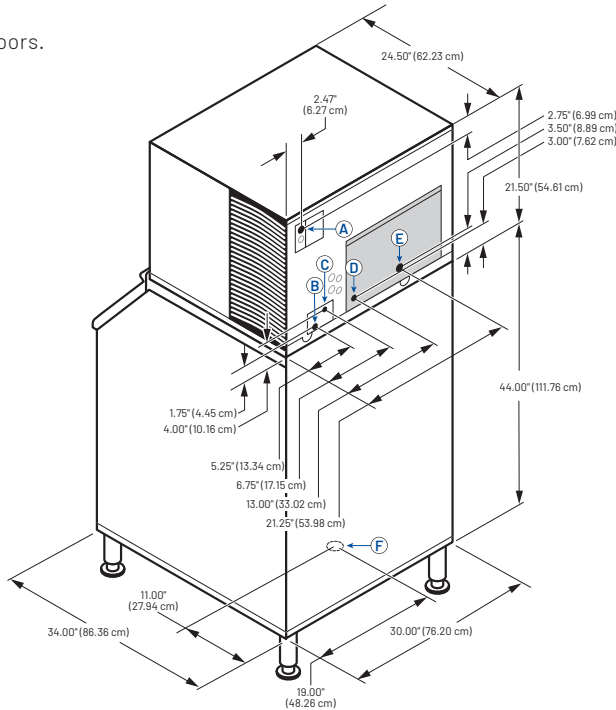

SPACE-SAVING DESIGN



**KP0700
K570**

Height	71.50" 181.61 cm
Width	30.0" 76.2 cm
Depth	34.0" 86.30 cm
Bin Storage	532 lbs 241 kgs

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the volume x 33 lbs/ft³ average density of ice. Ice machine and bin sold separately.

SPECIFICATIONS

	Model	Ice Shape	Shipping Weight	Ice Production 24 Hours		Power Usage kWh per 100 lbs of ice	Ice Machine Potable water usage per 100 lbs ice	Condenser water usage per 100 lbs ice
				70°Air/50°F Water 21°Air/10°C Water	90°Air/70°F Water 32°Air/21°C Water			
Air Cooled	KDP0700A	Dice	161 lbs (73.1 kgs)	614 lbs (279 kgs)	529 lbs (240 kgs)	4.91 ★	14.6 gal (55.3 L)	N/A
	KYP0700A	Half-Dice	160 lbs (72.6 kgs)	641 lbs (291 kgs)	545 lbs (247 kgs)	4.49 ★	14 gal (53 L)	N/A
Water Cooled	KDP0700W	Dice	158 lbs (71.7 kgs)	624 lbs (283 kgs)	521 lbs (236 kgs)	3.91	13.5 gal (51 L)	125 gal (473 L)
	KYP0700W	Half-Dice	158 lbs (71.7 kgs)	625 lbs (284 kgs)	571 lbs (259 kgs)	3.6	14 gal (53 L)	125 gal (473 L)

Water-cooled condenser water usage per 100 lbs (45.4 kgs) of Ice: 142 gal (537.5 L).

R290 is a refrigerant grade propane which is naturally occurring with no ozone depletion potential and extremely low global warming potential.

★ Energy Star Model

Limited Commercial Warranty

Ice Maker Three (3) years parts and labor

Evaporator Five (5) years parts and labor

Compressor Five (5) years parts, three (3) years labor

KOOLAIRE
FROM MANITOWOC

2110 South 26th Street | Manitowoc, WI 54220 | United States
+1.920.682.0161 | 920.683.7589 Fax | manitowocice.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. ©2025 Pentair. All rights reserved.




Models

☐ K-420 ☐ K-400 ☐ K-570 ☐ K-970

K-Series Ice Storage Bins



K-420



K-400



K-570



K-970

FEATURES

- All K-bins include one set of 4 legs. Adjustable from 6" to 7.75 in (15.24 to 20.32cm)
- Stay open door keeps bin door out of the way while scooping ice.
- Internal scoop holder keeps scoop above the ice line for better sanitation.
- Foamed insulated door reduces sweat on the door and keeps ice lasting longer.
- High tech stainless like finish with superior corrosion resistance.
- Black side panels to match your Koolaire modular ice machine.



Pictured: Koolaire Kuber KT0700 series on a K570 bin

K-Series
ICE STORAGE BINS

D-BIN CAPACITIES

*Application Capacity		**2017 AHRI Capacity		***2018 AHRI Cubic Volume
lbs.	kgs	lbs.	kgs	
383	174	310	141	12.9
365	166	290	132	12.3
532	241	430	195	17.9
882	400	710	322	29.7

BIN LEG OPTIONS

Order replacement adjustable legs 4" (10.16 cm) to 6" (15.24 cm) with kit K00441. Optional casters available 7.635" (19.37 cm) to 8.625" (21.1 cm) by ordering kit K00138. Casters cannot be used with K-420 bin.

WARRANTY

Bin & Accessories: 3 Year Parts & Labor

BIN MODEL	CAPACITY		KOOLAIRE KUBER ICE MACHINE MODEL NUMBER (ADAPTER LISTED, IF REQUIRED)						
	lbs.	kg	300	420	400	500	700	1000	1700
K-420	383	174		•					
K-400	365	166	•	K00472	•				
K-570	532	241	•	K00472	•	•	•	•	
K-970	882	400	K00470	K00473	K00470	K00470	K00470	K00470	•

Above dimensions include bin leg height of 6".

All bins include 82 oz white scoop part # 00011765

*Application Capacity is based on 90% of the volume x 33 lbs/ft³ average density of ice. Ice must be managed.

**2017 Approved AHRI capacity is based on 80% of the total volume x 30 lbs/ft³ average density of ice.

***2018 Approved AHRI measurement for bin capacity

KOOLAIRE
by MANITOWOC



2110 SOUTH 26TH ST | MANITOWOC, WI 54220 USA | 1-920-682-0161 [www.kool-air.com]