

MOTAK

Commercial Gas Range 6 Burners - 1 Griddle

Model #: **MR10-G24-C**

This commercial gas range has powerful 30,000 BTU cast iron burners. Each burner has a lift off head - individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, 24.75" high backriser and shelf, 6" adjustable stainless steel legs or casters and a 3/4" NPT gas connection.



The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 200°F - 500°F and is equipped with a flame failure safety device.


Not suitable for installation in non-commercial or residential applications.

Warranty

1 year parts & labor

Product Details

Certifications

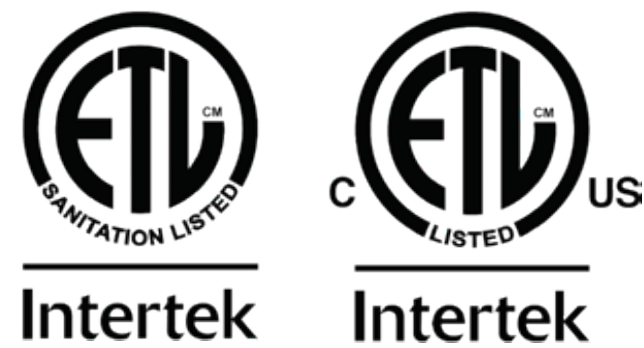

Top Burner

- Cast iron burners each giving off 30,000 BTU/hour
- 12" x 12" cast iron top grates are removable for easy cleaning
- Each burner has an individual standing pilot light
- Push in knob with efficient Hi-Low burner system
- Removable crumb tray

Griddle

- 3/4" thick griddle plate
- 4" welded griddle side shields
- Stainless Steel "U" burner
- Heat every 6" — valve control every 12"

Oven

- 30,000 BTU/hr total output
- Flame failure safety device
- Adjustable thermostat from 200°F – 450°F
- Steel liner on door and sides with a porcelain oven liner
- Includes 2 removable and adjustable oven racks

Construction

- Stainless steel front, back riser and shelf
- Spring loaded door with cool to touch stainless steel oven door handle
- 6" stainless steel adjustable legs
- 3/4" rear NPT gas connection

MOTAK


Model #:MR10-G24-C

Commercial Gas Range


6 Burners - 1 Griddle

Plan View

- A pressure regulator is provided with this unit.
 - Natural Gas 4.0" W.C.
 - Propane Gas 10.0" W.C.
- Rear Gas Connection ¾" NPT

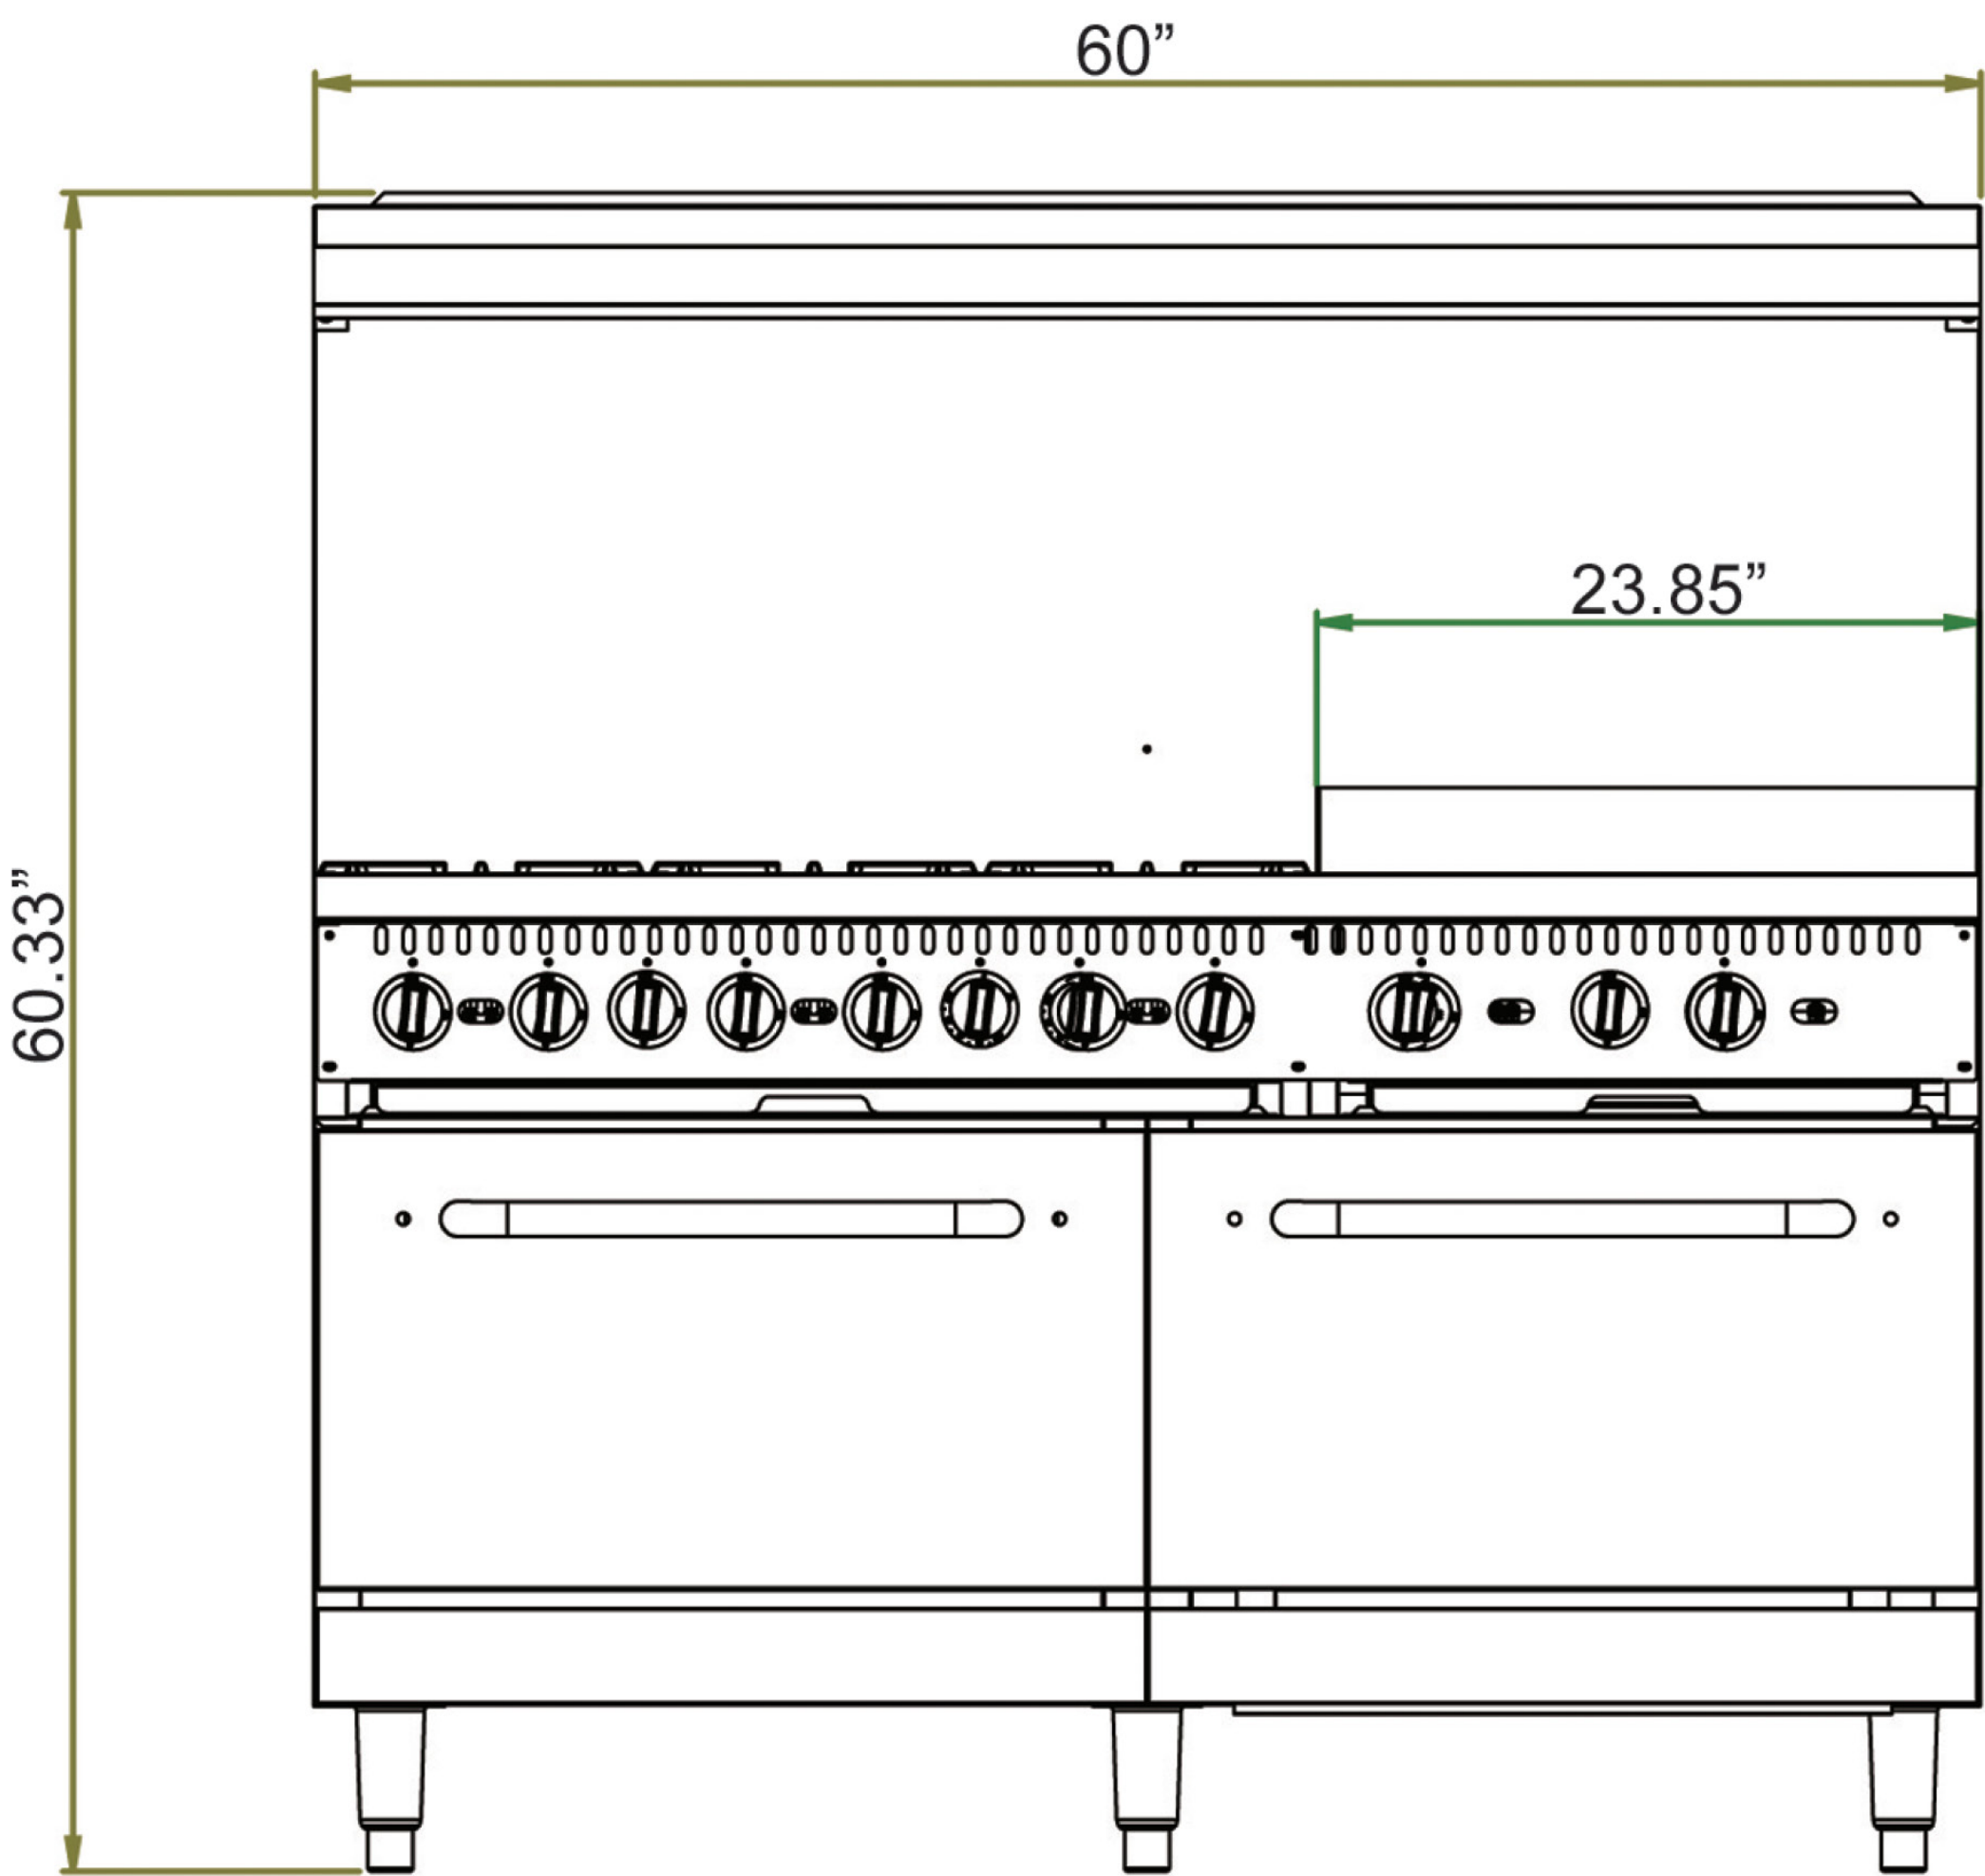

Front View

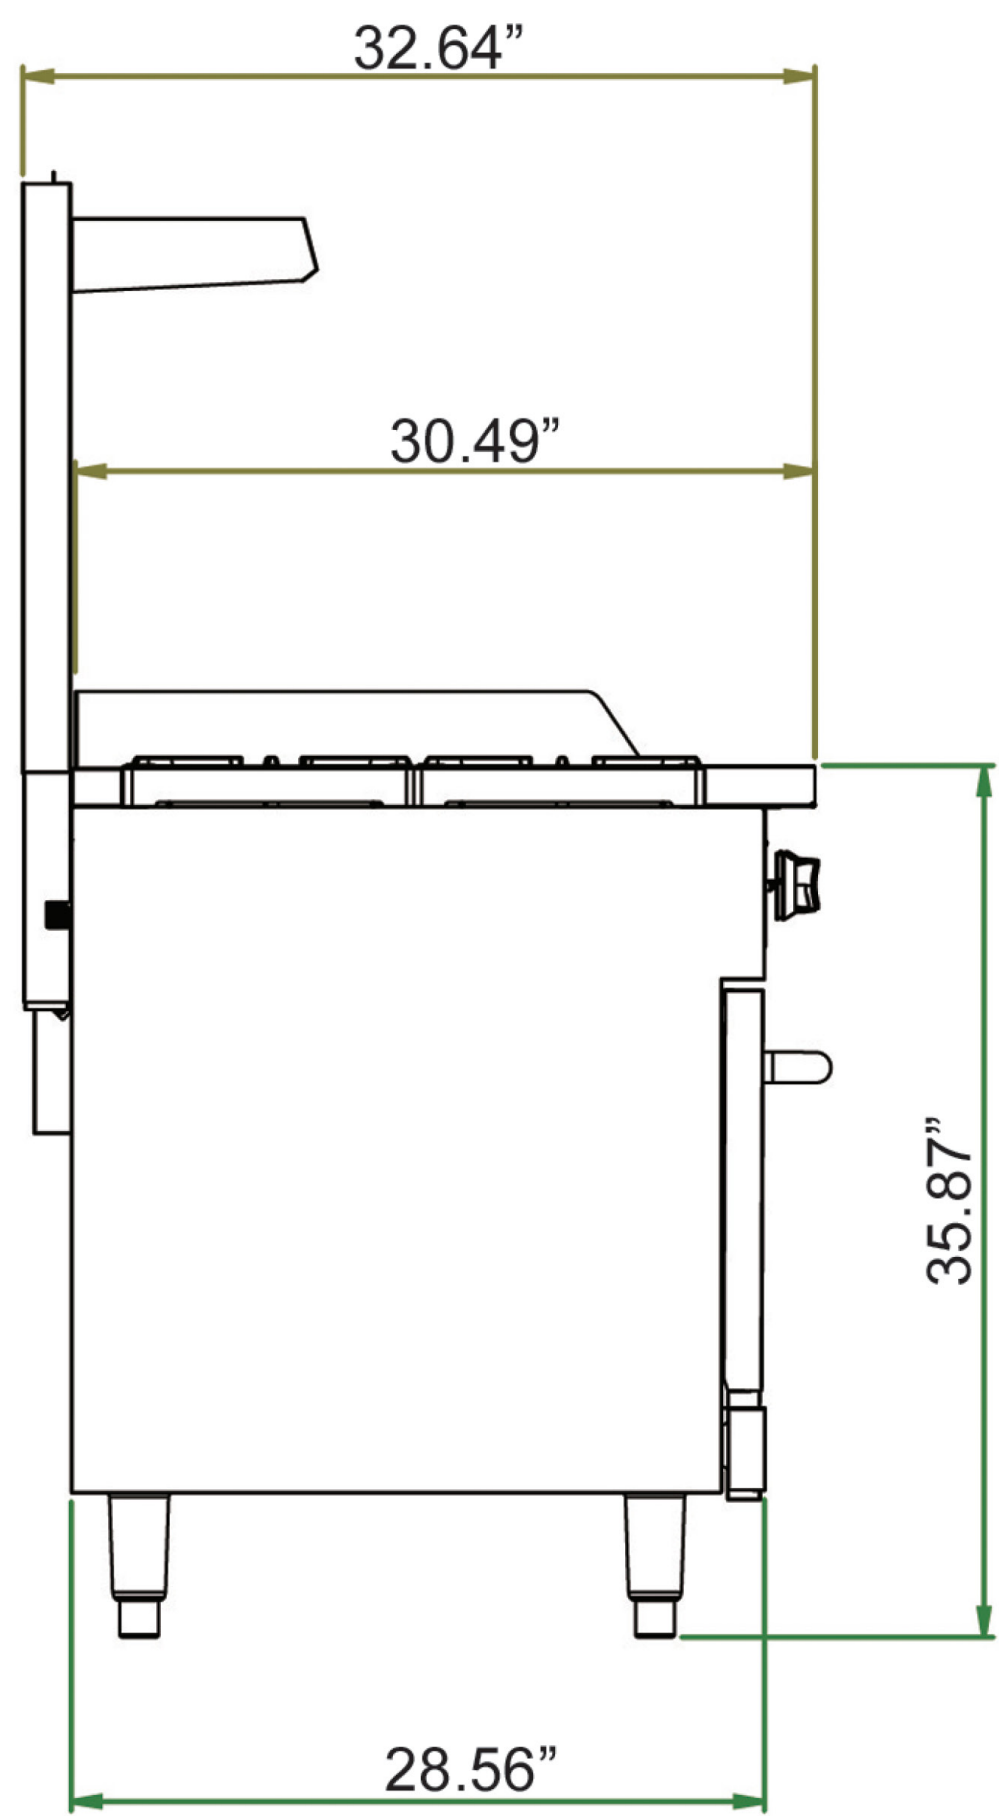

Side View

*Pictured with legs. This model comes standard with caster.

Specifications

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	Total BTU	Crated Weight (lbs)
		Width	Depth	Height	Width	Depth	Height				
MR10-G24-C	6	60"	32.5"	60.5"	26.88"	25.8"	13.8"	30,000	30,000	360,000	816 lbs.

Not suitable for installation in non-commercial or residential applications.